




Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

WPS S | LED Select Wall Pack

Features:

- High performance LED technology
- Type 3 optics for even illumination
- Field selectable color temperature: 3000K /4000K /5000K
- Field selectable output: 20W/30W/40W/50W

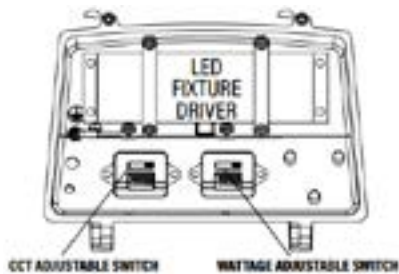

Construction:

- Durable weather resistant, die-cast aluminum housing
- UV resistant polycarbonate optical lens
- Available in white or bronze finish



Certifications:

- ETL Listed for wet locations
- IP65



Predicted L70 Lifetime:

- 50,000 hrs



Applications:

- Suitable for most exterior wall mount applications
- Industrial
 - Retail
 - Commercial

Ambient Operating Temp:

- -30°C to 45°C

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:

example: WPS S SEL 3 UV CP 7SEL-WH


Series	Size	Output	Optic	Voltage	Shielding	CRI/CCT	-	Finish
WPS	S	SEL	3	UV	CP	7SEL	-	
WPS	S Small	SEL Field Selectable: Low (20W) Medium (30W) High (40W) Very High (50W)	3 Type III	UV 120-277	CP Clear Polycarbonate	7SEL 70 CRI / Field Selectable CCT: 3000K 4000K 5000K		WH White Finish BZ Bronze Finish

Accessories: (order separately)

- EM-WPS *** Emergency pack: 4W / 90 minute (0°C to 45°C operating temp.)
- BPC-WPS *** Button Style Photo Cell (120-277V)

* EM & BPC can not be used together. One accessory prevents the other from fitting in the luminaire.

Schematic:

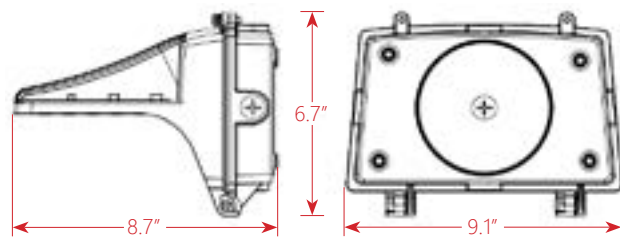

Performance Chart:



Selectable Output	Watts	Lumens	LPW	BUG Rating
Low	20	2312	115.6	B1-U1-G1
Medium	31	3764	122.8	B1-U1-G1
High	40	4879	123.3	B1-U1-G1
Very High	50	6343	127.0	B1-U2-G1

Values in chart reflect 4000K & 5000K color temp.
Scaling Factor for 3000K: 0.95

Photometric Data:

WPS S SEL 3 UV CP 7SEL (30W)

Luminaire Lumens: 3,764.4 lm
Luminaire Watts: 30.65 W
Efficacy: 122.8 LPW

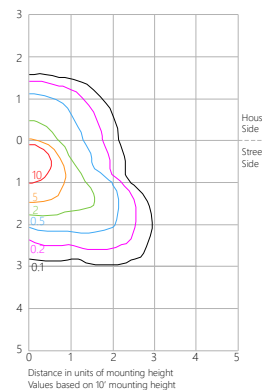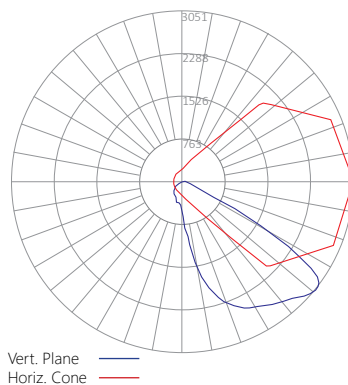

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lum
FL (0-30)	629.8	16.7
FM (30-60)	2000.2	53.1
FH (60-80)	659.2	17.5
FVH (80-90)	18.5	0.5
BL (0-30)	150.7	4.0
BM (30-60)	236.9	6.3
BH (60-80)	57.0	1.5
BVH (80-90)	4.6	0.1
UL (90-100)	1.2	0.0
UH (100-180)	6.3	0.2
Total	3764.4	100.0

BUG Rating B1-U1-G1

