

Project: _____
Location: _____
Cat. #: _____
Type: _____
Quantity: _____

LED

WDS | LED Select Wall Pack

Features:

- High performance LED technology
- 0-10V dimming down to 10%
- Type 2 optics for even illumination
- Field selectable color temperature: 3000K /4000K /5000K
- Field selectable output: 40W/50W/60W/80W

Applications:

- Suitable for most exterior wall mount applications
- Industrial
 - Retail
 - Commercial

Predicted L70 Lifetime:

- 50,000 hrs

Ambient Operating Temp:

- -30°C to 45°C

Construction:

- Durable weather resistant, die-cast aluminum housing in bronze finish
- UV resistant polycarbonate optical lens

Certifications:

- ETL Listed for wet locations
- IP65



Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:


example: WDS SEL 2 UV CP 7SEL BZ

Series	Output	Optic	Voltage	Shielding	CRI/CCT	Finish
WDS	SEL	2	UV	CP	7SEL	BZ
WDS	SEL Field Selectable: Low (40W) Medium (50W) High (60W) Very High (80W)	2 Type II	UV 120-277	CP Clear Polycarbonate	7SEL 70 CRI / Field Selectable CCT: 3000K 4000K 5000K	BZ Bronze Finish

Accessories: *(order separately)*

BPC-WDS Button Style Photo Cell (120-277V)

Schematic:

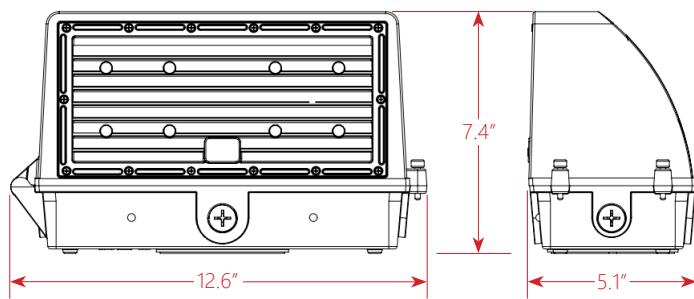

Performance Chart:



Selectable Output	Watts	Lumens	LPW	BUG Rating
Low	40	5212	130	B2-U2-G1
Medium	50	6500	130	B2-U2-G1
High	60	7800	130	B2-U2-G1
Very High	80	10399	130	B3-U2-G2

Values in chart reflect 3000K color temp.

Photometric Data:

WDS SEL 2 UV CP 7SEL (80W)

Luminaire Lumens: 10,979 lm
Luminaire Watts: 77.97 W
Efficacy: 140.8 LPW
CCT: 5000K

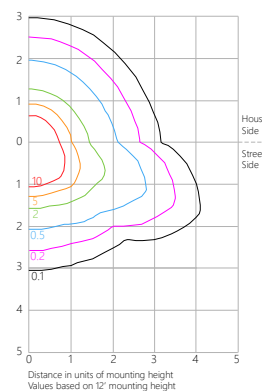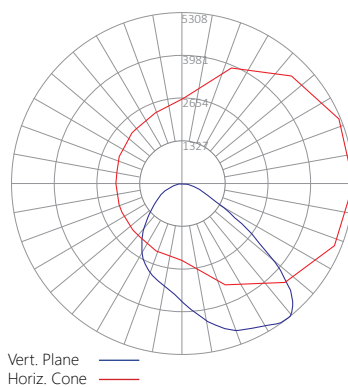

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lum
FL (0-30)	1781.0	16.2
FM (30-60)	4222.2	38.5
FH (60-80)	1145.7	10.4
FVH (80-90)	75.2	0.7
BL (0-30)	1263.1	11.5
BM (30-60)	1899.3	17.3
BH (60-80)	513.3	4.7
BVH (80-90)	39.0	0.4
UL (90-100)	2.1	0.0
UH (100-180)	38.0	0.3
Total	10978.9	100.0

BUG Rating B3-U2-G2

