



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

EVL G2 2 | LED Lensed Utility

Features:

- High performance LED technology
- 90+ CRI standard
- 0-10V dimming drivers standard
- DALI drivers available
- Field replaceable LED boards and drivers
- Optional Motion/Sound sensor available
- Slide-on and mouse hole ends available as ends with tapped holes to accommodate tamper-proof screws

Applications:

Suitable for wall and ceiling mount applications

- Bathrooms
- Corridors
- Stairwells

Predicted L70 Lifetime:

- L70 \geq 142,000 hrs (calculated)
- L80 \geq 89,000 hrs (calculated)
- L90 \geq 43,000 hrs (reported)
- 86% lumen maintenance @ 60,000 hrs
(based on LM-80, TM-21 and in-situ laboratory testing)

Construction:

- Heavy-gauge cold rolled steel housing and end caps
- Clear prismatic acrylic lens
- White powder coat finish


Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations



Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions
- 10 year warranty option available on specific models
(Not available on all models. Certain conditions apply. Consult factory or sales representative for details.)

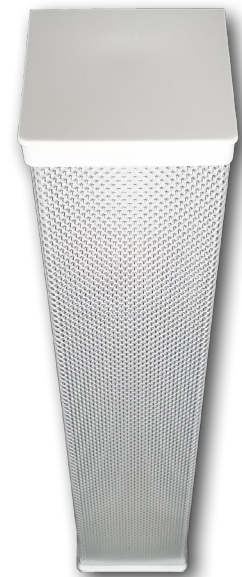

Ordering Guide:

example: EVL G2 2 MD UV CPA 940 ZMSS

Series	Length	Output	Voltage	Shielding	CRI/CCT	Controls	Options	
EVL G2	2			CPA				
EVL G2	2 2'	VL Very Low	UV 120-277	CPA Clear Prismatic Acrylic	935 90 CRI/3500K	Blank No Controls	Blank No Options	
		LW Low	34 347V		935 90 CRI/3500K	ZMSS Motion/Sound Sensor	EXT10 10-Year Extended Warranty ⁽¹⁾	
		MD Medium			940 90 CRI/4000K	ZOSMD Microwave Occupancy Sensor (On/Off/Dim)	SO Slide-On End Caps	
					950 90 CRI/5000K		MH Mouse Hole End Caps	
						TH Tapped Hole End Caps	CC Conformal Coating	
						LVL 0-10V Dimming Leads for Easy Field Access	BAA Buy American Act Compliant	

Mouse Hole
End Cap (MH)

Tapped Hole
End Cap (TH)

Notes

⁽¹⁾ Not available on all models. Certain conditions apply. Consult factory or sales representative for details.

Notes

⁽¹⁾ Not available on all models. Certain conditions apply. Consult factory or sales representative for details.




Mouse Hole
End Cap (MH)



Tapped Hole
End Cap (TH)

Schematic:

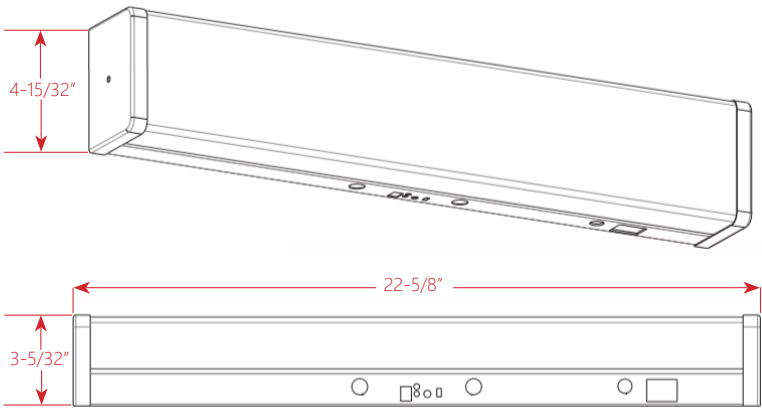

Performance Chart:

Catalog #	Watts	Lumens (930)	LPW (930)	Lumens (935)	LPW (935)	Lumens (940)	LPW (940)	Lumens (950)	LPW (950)
EVL G2 2 VL UV CPA 9xx	8.9	1041.5	117.4	1045.9	117.9	1070.7	120.7	1070.7	120.7
EVL G2 2 LW UV CPA 9xx	16.0	2015.7	125.7	2024.2	126.2	2072.2	129.2	2072.2	129.2
EVL G2 2 MD UV CPA 9xx	22.7	3046.7	134.1	3059.6	134.6	3132.3	137.8	3132.3	137.8



The EVL features field replaceable boards and drivers. This allows you to upgrade to more efficient technology in the future. Or, in the rare event of a failure, you can rapidly replace defective components. Re-boardABILITY helps to ensure you won't get stuck with an obsolete light fixture. [Learn more about Re-boardABILITY here.](#)

Controls Summary:

Control Code	Type	Capabilities	Communication
ZMSS	Motion/Sound Sensor	On/Off, Reverse Occupancy, Bi-level High/Low. Contact factory for details on settings.	Wired
ZOSMD	Motion (Microwave), Photosensor	On/Low/Off	Wired 1-10V



Motion/Sound Sensor (ZMSS)

The integrated Wattstopper FS-505 (or equivalent) utilizes high frequency (40 kHz) ultrasonic technology to sense motion within a space and energize the luminaire even when the sensor has no direct line of sight to any occupants. This sensor transmits sound waves through the area and measures the speed at which they return. If there are any occupants in the space, this increases the return frequency and indicates occupancy, which illuminates the EVL.

Microwave Occupancy Sensor (ZOSMD)

The Leviton OSM3D-DDW (or equivalent) detects motion through low density materials using high frequency electromagnetic waves. This means it can sit discretely behind the EVLs lens. The ZOSMD features automatic switching based on motion and ambient light level. ZOSMD option adds step-dimming functionality - standby dimming level 10% / 20% / 30% / 50%. Max mounting height for ZOSMD is 40 feet.

