

Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

NEAR-UV 405 NM LED

FFL D 22 | LED Disinfection Lay-In

Features:

- High performance disinfecting LED technology
- Continuously disinfect hard or soft surface, killing 99.9% of bacteria when lights are kept on
- Effective against MRSA, C. Difficile, Salmonella, E. Coli
- Completely harmless to humans and animals as the antibacterial spectrum is part of the normal visible LED spectrum (405nm near-UV wavelength)
- Field replaceable LED boards and drivers
- Frosted diffuser optimized to balance efficiency and aesthetics
- Low profile and lightweight housing allows for easy installation
- Buy American Act compliant (All base luminaires are BAA compliant. Addition of options may change eligibility. Contact factory for details.)

Applications:

Suitable for most commercial and institutional applications

- Office
- Retail
- Classrooms
- Healthcare Facilities
- Labs and clinics

Construction:

- Die-formed heavy-gauge cold rolled steel ballast housing with precision brake formed aluminum LED tray
- Frosted Polycarbonate Diffuser
- White enamel finish

Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations



Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions

Note: UVFocus products are designed utilizing proven anti-bacterial technology. 405nm near-UV light has been shown to substantially reduce bacterial presence. While these products can be considered disinfecting products, they should be used in conjunction with standard, proper disinfecting cleaning procedures to have the greatest impact for maintaining a clean environment. Successful UV disinfection requires a systems approach taking into account dose, optics and safety relevant to the specific application. Please consult with factory any questions or concerns.



UVFOCUS



Ordering Guide:

example: FFL D 22 HI UV FA 840

| Series | Size | Output | Voltage | Shielding | CRI/CCT | Options |
|---|------------------|-------------------|---|------------------------------|---|---|
| FFL D | 22 | HI | | FA | 840 | |
| FFL D FFL Disinfection Lay-In | 22 2x2 | HI High | UV 120-277 34 347V | FA Frosted Acrylic | 840 80 CRI / 4000K Disinfection LEDs | Blank No Options W6 6' Whip W10 10' Whip EM1 Emergency Kit - 12W 1200 nominal lumens ⁽¹⁾ F Fuse GC Grid Clip SDT(347V) 347V to 277V Step Down Transformer AR Plenum Ceiling Air Return LVL 0-10V Dimming Leads for Easy Field Access BAA Buy American Act Compliant |


Notes

⁽¹⁾ 120-277V only / 0°C-50°C ambient.

Performance Chart:



| Catalog # | Watts | Lumens | LPW |
|-----------------------|-------|--------|------|
| FFL D 22 HI UV FA 840 | 60 | 5300 | 88.3 |

Schematic:

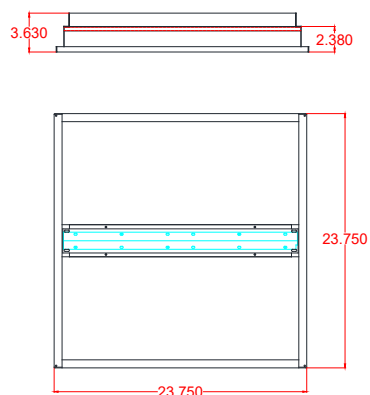

LUMENFOCUS Re-boardABILITY

The FFL D features field replaceable boards and drivers. This allows you to upgrade to more efficient technology in the future. Or, in the rare event of a failure, you can rapidly replace defective components. Re-boardABILITY helps to ensure you won't get stuck with an obsolete light fixture. [Learn more about Re-boardABILITY here.](#)

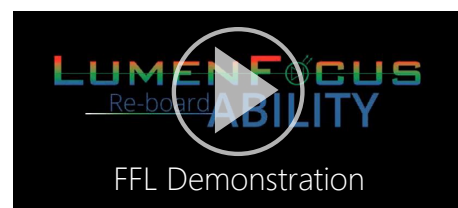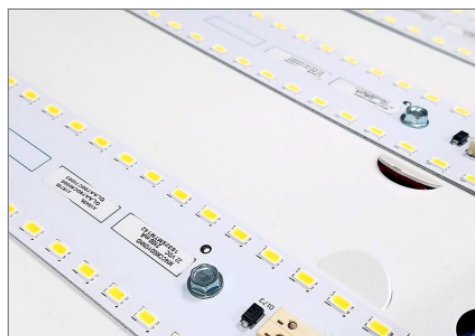

[Click here for a video demonstration of the re-boarding process on a FFL.](#)

Note: Exact time varies depending on the model.

