



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____



NVL F G2 8 | LED Vaportight High/Low Bay

Features:

- High performance LED technology
- 0-10V dimming drivers standard
- Multiple hanging options, including surface, chain, and aircraft cable, for easy installation
- Pre-wired 6' single circuit cord comes standard. Other cord options available
- Durable materials and craftsmanship allows the NVL F to withstand some of the harshest environments
- Buy American Act compliant *(All base luminaires are BAA compliant. Addition of options may change eligibility. Contact factory for details.)*

Applications:

Most industrial, retail, and recreational low bay and high bay applications

- Warehouse
- Manufacturing Facility
- Food Processing
- Cold/Frozen Storage *(cold temperature rules apply. Refer to warranty document at www.lumenfocus.com/support for details)*

Ambient Operating Temp.:

- -30°C to 35°C

Predicted Lifetime:

- L70 ≥ 129,000 hrs (calculated)
 - L90 ≥ 39,000 hrs (reported)
- (based on LM-80, TM-21 and in-situ laboratory testing)

Construction:

- UL 5VA fiberglass housing (will not melt or burn)
- Clear polycarbonate lens
- Pre-painted aluminum board trays
- Stainless steel mounting hardware

Certifications:

- UL 1598 listed for US and Canada, suitable for wet locations
- IP66
- NEMA 4X
- NSF
- PSI 1500
- RoHS



Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions

CAUTION: Due to high pressure washdown requirements, fixture minimum mounting height is 14 feet above the floor. Lens system should never be removed by anyone but a factory-approved trained technician using torque wrenches.



ALTOR



Ordering Guide:

example: NVL F G2 8 HI UV CFP 940 SM C6

Series	Vesion	Length	Output	Voltage	Shielding	CRI/CCT	Hanging	Controls	Cords	Options
NVL F	G2	8								
NVL F Flat Bottom Vaportight	G2 Gen 2	8 8'	SL Super Low	UV 120-277	CFP Clear Flat Polycarbonate	930 90 CRI/3000K	Blank Surface Mounting Bracket (Comes Standard)	Blank No Controls	C6 6' Single Circuit Cord (Comes Standard) C6(LVL) C6 With Integrated Dimming Leads C10 10' Single Circuit Cord C10(LVL) C10 With Integrated Dimming Leads D6 6' Dual Circuit Cord D10 10' Dual Circuit Cord	Blank No Options
			VL Very Low		CFPP Heavier Gauge Clear Flat Polycarbonate	935 90 CRI/3500K	SMBB Mounting Bracket Bail (For Chain Or Cable Mount)	ZOS Occupancy Sensor (On/Off) ⁽¹⁾		P(NEMA) Plug (Specify NEMA configuration)
			LW Low			940 90 CRI/4000K	SMBBQ Bracket Bail with 10' Quick Hang Cable Kit	ZOSMD Microwave Photo/Motion Sensor With Step-Dimming (High/Low/Off) ⁽¹⁾		EM6 6.5W Emergency Pack ^(4,6)
			MD Medium			950 90 CRI/5000K	SMBBQC Bracket Bail with 20' Quick Hang Cable Kit	ZOFD1 Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping (120-277V) ⁽¹⁾		EM10 10W Emergency Pack ^(4,6)
			MH Medium High				SMBBQC20 Bracket Bail with 20' Quick Hang Cable Kit	ZOFD1 Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping (120-277V) ⁽¹⁾		EM14 14W Emergency Pack ^(4,6)
			HI High				SM45 45° Surface Mount Bracket	ZOFDU Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping, Scheduling (120- 480V) ⁽¹⁾		EM10C 10W Cold Temp. Emergency Pack ^(5,6)
			VH Very High				SC Safety Cable	Z221BL Wattstopper Programmable Photo/Motion Multi-Voltage Sensor (high/low/off) ⁽²⁾		EM16C 16W Cold Temp. Emergency Pack ^(5,6)
								Z321BL Wattstopper Bluetooth- enabled Programmable Dimming/Occupancy/ Daylight Harvesting Multi- Voltage Sensor ⁽²⁾		F Fuse
								ZPC Photocell		SDT(480V) 480V To 277V Step Down Transformer
								ZENLC Enlighted Ruggedized Sensor with Dimming/Occupancy/ Daylight Harvesting and Enlighted Connected System ⁽³⁾		BAA Buy American Act Compliant
								ZENLI Enlighted Ruggedized Sensor with Dimming/Occupancy/ Daylight Harvesting and Enlighted IoT System ⁽³⁾		

Notes

⁽¹⁾ Max mounting height 40'. See Page 4 for more details

⁽²⁾ " _ " = lens type. Max mounting height 40'. See Page 4 for more details.

⁽³⁾ Max mounting height 50'. See Page 5 for more details on advanced controls.

⁽⁴⁾ 120-277V / 0°C-55°C ambient.

⁽⁵⁾ 120-277V / -20°C-55°C ambient. Adds up to 11W to luminaire system wattage.

⁽⁶⁾ To estimate lumen output in emergency mode, multiply EM wattage by the Lumens per Watt of the luminaire it is installed in.
ex. NVL F G2 8 HI UV CFP 950 EM10C → 131.0 LPW x 10W = 1,310 lm

Controls Accessories (order separately)



For Enlighted Controls

WS-2-00 Enlighted Remote Control Wall Switch
(for Enlighted Connected & IoT)



For WattStopper Controls


FSIR-100 Wireless IR Programming Tool
(For Z221Lx)

Performance Chart:


Catalog #	Watts	Lumens (930)	LPW (930)	Lumens (935)	LPW (935)	Lumens (940)	LPW (940)	Lumens (950)	LPW (950)
NVL F G2 8 SL UV CFP 9xx	30.2	3972.9	131.6	3989.7	132.1	4084.4	135.2	4084.4	135.2
NVL F G2 8 VL UV CFP 9xx	44.4	5724.0	128.9	5748.2	129.4	5884.7	132.5	5884.7	132.5
NVL F G2 8 LW UV CFP 9xx	61.5	7575.4	123.1	7607.4	123.6	7788.0	126.6	7788.0	126.6
NVL F G2 8 MD UV CFP 9xx	71.2	9405.5	132.0	9445.1	132.6	9669.5	135.7	9669.5	135.7
NVL F G2 8 MH UV CFP 9xx	87.9	11307.1	128.7	11354.7	129.2	11624.4	132.3	11624.4	132.3
NVL F G2 8 HI UV CFP 9xx	118.0	15037.1	127.4	15100.5	127.9	15459.1	131.0	15459.1	131.0
NVL F G2 8 VH UV CFP 9xx	145.1	18736.4	129.1	18815.3	129.6	19262.2	132.7	19262.2	132.7

Photometric Data:


Relative Luminous Intensity




Schematic:

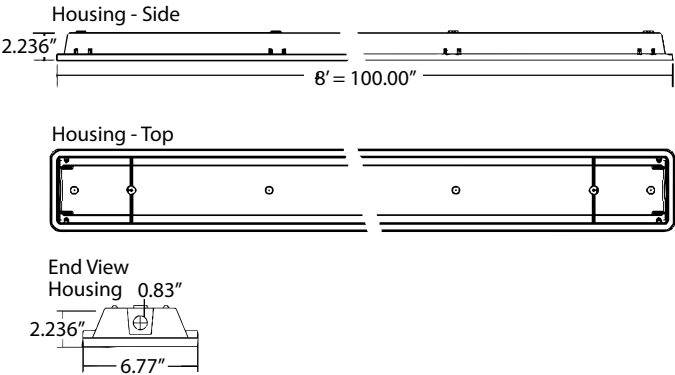


Mounting:

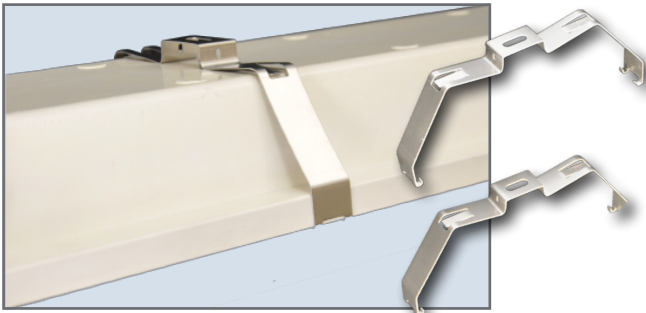

SM Surface Mount Bracket (comes standard)

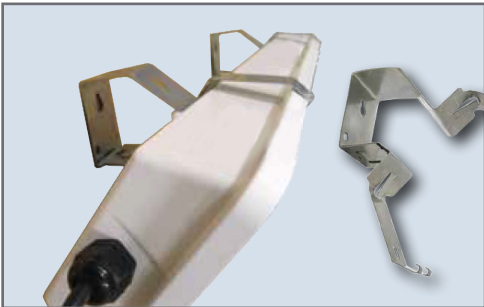

SM45 45° Surface Mount Bracket

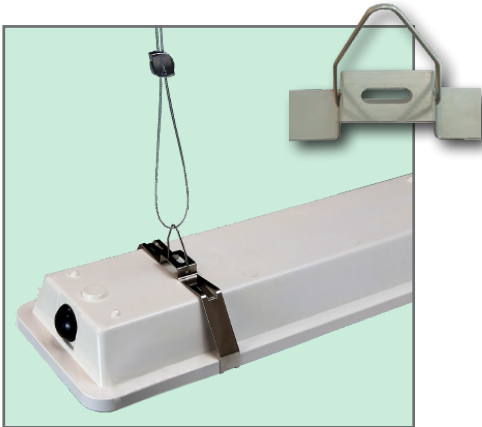

SMBB Surface Mount with Bracket Bail - for chain or cable mounting. (Shown with QC)



Controls Summary:

Control Code	Type	Capabilities	Communication
ZOS	Motion (PIR)	On/Off	Wired
ZOSMD	Motion (Microwave), Photosensor	On/Low/Off	Wired 1-10V
ZOFD1	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim, Grouping	Wired 0-10V, Programmable via Bluetooth App (iOS, Android)
ZOFDU	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim, Grouping, Scheduling	Wired 0-10V, Programmable via Bluetooth App (iOS, Android)
Z221BLx	Motion (PIR), Photosensor	High/Low/Off, High-End Trim	Wired 0-10V, Programmable via IR remote (sold separately)
Z321BLx	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim	Wired 0-10V, Programmable via Bluetooth App (iOS, Android)
ZPC	Photosensor	On/Off	Wired
ZENLC	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim, Grouping, Scheduling*, Energy Monitoring*, BMS Integration*, Upgradable to IoT (ZENLI), LLLC (Enlighted IoT)*	Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted IoT Software
ZENLI	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim, Grouping, Scheduling*, Energy Monitoring*, BMS Integration*, LLLC (Enlighted IoT)*, Space - Building Utilization*, Where - Real Time Location Services*	Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted IoT Software

LLLC = Luminaire Level Lighting Control
* Additional equipment required. Contact LumenFocus representative for details

On/Off Occupancy Sensor (ZOS)

The Leviton OSFHL-CTW (or equivalent) is an end mounted PIR On/Off motion sensor. It comes with two interchangeable lenses: Low Bay (8-25' heights), High Bay (20-40' heights), as well as an aisle mask.

- IP65 rated



Microwave Occupancy Sensor (ZOSMD)

The Leviton OSM3D-DDW (or equivalent) detects motion through low density materials using high frequency electromagnetic waves. This means it can sit discretely behind the NVL F's lens. The high frequency waves offer less interference and false tripping than traditional sensing technology for reliable occupancy applications. The ZOSMD features automatic switching or dimming based on motion. The ZOSMD option adds step-dimming functionality - standby dimming level 10% / 20% / 30% / 50%. Max mounting height is 40 feet.



Programmable Dimming Sensors:

ZOFDx Sensors



The ZOFDx option includes four sensor lenses that can easily be installed or swapped out in the field. From left: the high bay lens (20'-40' mounting), the high bay lens with aisleway mask, the low bay lens (8'-20' mounting), and the low bay lens with aisleway mask.

- Leviton Smart IP66 passive infrared (PIR) sensors
- Features mesh grouping (16 devices per group), occupancy sensing, daylight harvesting, scheduling (for ZOSFDU only), single-level switching
- Comes pre-installed on the end cap
- Rated for cold locations
- Configurable through the Leviton Smart Sensor App using a smartphone or other Bluetooth-enabled iOS or Android device

Z221B/Z321B Sensors

- The Wattstopper FSP sensor provides multi-level control based on motion and/or daylight contribution
- Rated for cold locations
- Parameters for Bluetooth-enabled Z321B adjustable via phone app - iOS or Android
- Parameters for Z221B adjustable via wireless configuration tool (FSIR-100 - sold separately)
- Three lenses available, tailored for the ideal detection area and mounting height:
 - L2: 360° lens, maximum coverage 48'; diameter from 8' height
 - L3: 360° lens, maximum coverage 40'; diameter from 20' height
 - L7: 360° lens, maximum coverage 100'; diameter from 40' height



1) The Wattstopper FSP sensor. 2) The phone app interface for the Z321B. 3) The FSIR-100 wireless configuration tool.



Enlighted: All-in-one sensors, upgradeable systems

Enlighted's IP65-rated Ruggedized Sensor is an all-in-one unit: task tuning, high-end trimming, daylight harvesting, and occupancy/vacancy detection. Max installation height is 50 feet.

Enlighted Connected ("ZENLC") offers many features, including motion and switch groups, daylight harvesting, energy reporting, and more. The Enlighted IoT ("ZENLI") option allows the full implementation of Enlighted's services. Enlighted Connected can be fully upgraded to the next tier in the future. So if you start with ZENLC but want to add the functionality of the ZENLI option, you can.




Enlighted Capabilities*	Enlighted Connected (ZENLC)	Enlighted IoT (ZENLI)
Motion and Switch Groups	✓	✓
Daylight Harvesting	✓	✓
Schedule Lighting	✓	✓
Energy Reporting & Optimization	✓	✓
Environment Data & Lighting Controls API	✓	✓
Building Management System Integration	✓	✓
Where & Space Applications		✓
Location & Occupancy APIs & Beacons		✓
Future App & API Ready		✓

Real-time data analytics

Enlighted's control units compile data in real-time, which can be viewed via the Energy Manager. The Energy Manager is part of the Enlighted Connected and Enlighted IoT configurations.

- Real-time measurements and verification of energy savings
- Space analytics - data can be compiled into motion trails and heat maps
- Analyze traffic density and congestion in a space

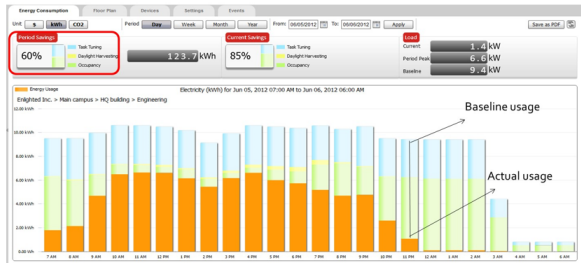

© 2024 Enlighted for all Enlighted content and images.

