



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV 935 @1300MA.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-016(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 8 SEL75 UV 935

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] no enclosure.

[LAMPCAT] Four LS3872A 48 LED boards, 3500K

[BALLAST] One KTLD-75-UV-PS1400-54-VDIM-LM2 LED driver set to 1300mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	10362
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	162
Total Luminaire Watts	63.8
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.32
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	8.00 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.02 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	12347	11923	11826
55	12151	11575	11228
65	11504	10544	10123
75	9840	8292	7716
85	5633	3754	3327

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV 935 @1300MA.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1267.27	N.A.	12.20
0-30	2713.87	N.A.	26.20
0-40	4493.11	N.A.	43.40
0-60	8129.28	N.A.	78.50
0-80	10194.5	N.A.	98.40
0-90	10360.98	N.A.	100.00
10-90	10034.74	N.A.	96.80
20-40	3225.84	N.A.	31.10
20-50	5116.94	N.A.	49.40
40-70	4971.39	N.A.	48.00
60-80	2065.22	N.A.	19.90
70-80	730.00	N.A.	7.00
80-90	166.48	N.A.	1.60
90-110	0.91	N.A.	0.00
90-120	0.91	N.A.	0.00
90-130	0.91	N.A.	0.00
90-150	0.91	N.A.	0.00
90-180	0.91	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	10361.89	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	326.25
10-20	941.02
20-30	1446.6
30-40	1779.24
40-50	1891.1
50-60	1745.06
60-70	1335.23
70-80	730.00
80-90	166.48
90-100	0.91
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV 935 @1300MA.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	90	83	78	96	88	82	77	85	79	75	82	77	73	78	75	71	69
3	90	79	71	64	87	77	70	64	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	68	60	54	66	59	53	64	57	52	61	56	52	49
5	75	62	53	46	73	61	53	46	59	51	46	57	50	45	55	49	45	42
6	69	56	47	40	68	55	46	40	53	45	40	51	45	39	50	44	39	37
7	64	51	42	36	63	50	41	35	48	41	35	47	40	35	45	39	35	33
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV 935 @1300MA.IES**

**UGR TABLE - CORRECTED**

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	20.7	22.4	21.1	22.7	23.0	20.8	22.5	21.2	22.8	23.1
	3H	22.5	24.0	22.9	24.3	24.7	22.6	24.1	23.0	24.5	24.8
	4H	23.1	24.5	23.5	24.9	25.2	23.2	24.6	23.6	25.0	25.4
	6H	23.5	24.8	23.9	25.2	25.6	23.6	24.9	24.0	25.3	25.7
	8H	23.6	24.8	24.0	25.2	25.6	23.7	25.0	24.2	25.4	25.8
	12H	23.6	24.8	24.0	25.2	25.6	23.8	25.0	24.2	25.4	25.8
4H	2H	21.4	22.8	21.8	23.1	23.5	21.5	22.9	21.9	23.2	23.6
	3H	23.3	24.5	23.7	24.9	25.3	23.4	24.6	23.8	25.0	25.4
	4H	24.1	25.1	24.5	25.5	26.0	24.1	25.2	24.6	25.6	26.0
	6H	24.6	25.5	25.0	25.9	26.4	24.6	25.6	25.1	26.0	26.5
	8H	24.7	25.5	25.1	26.0	26.5	24.8	25.6	25.2	26.1	26.5
	12H	24.7	25.5	25.2	26.0	26.5	24.8	25.6	25.3	26.1	26.6
8H	4H	24.3	25.2	24.8	25.6	26.1	24.4	25.3	24.8	25.7	26.2
	6H	24.9	25.6	25.4	26.1	26.6	25.0	25.7	25.5	26.2	26.6
	8H	25.0	25.7	25.6	26.2	26.7	25.1	25.8	25.6	26.3	26.8
	12H	25.2	25.7	25.7	26.2	26.8	25.3	25.8	25.8	26.3	26.9
12H	4H	24.3	25.1	24.8	25.6	26.1	24.4	25.2	24.9	25.7	26.1
	6H	24.9	25.6	25.4	26.0	26.6	25.0	25.6	25.5	26.1	26.6
	8H	25.1	25.7	25.6	26.2	26.8	25.2	25.8	25.7	26.3	26.8

Maximum UGR = 26.9

POLAR GRAPH

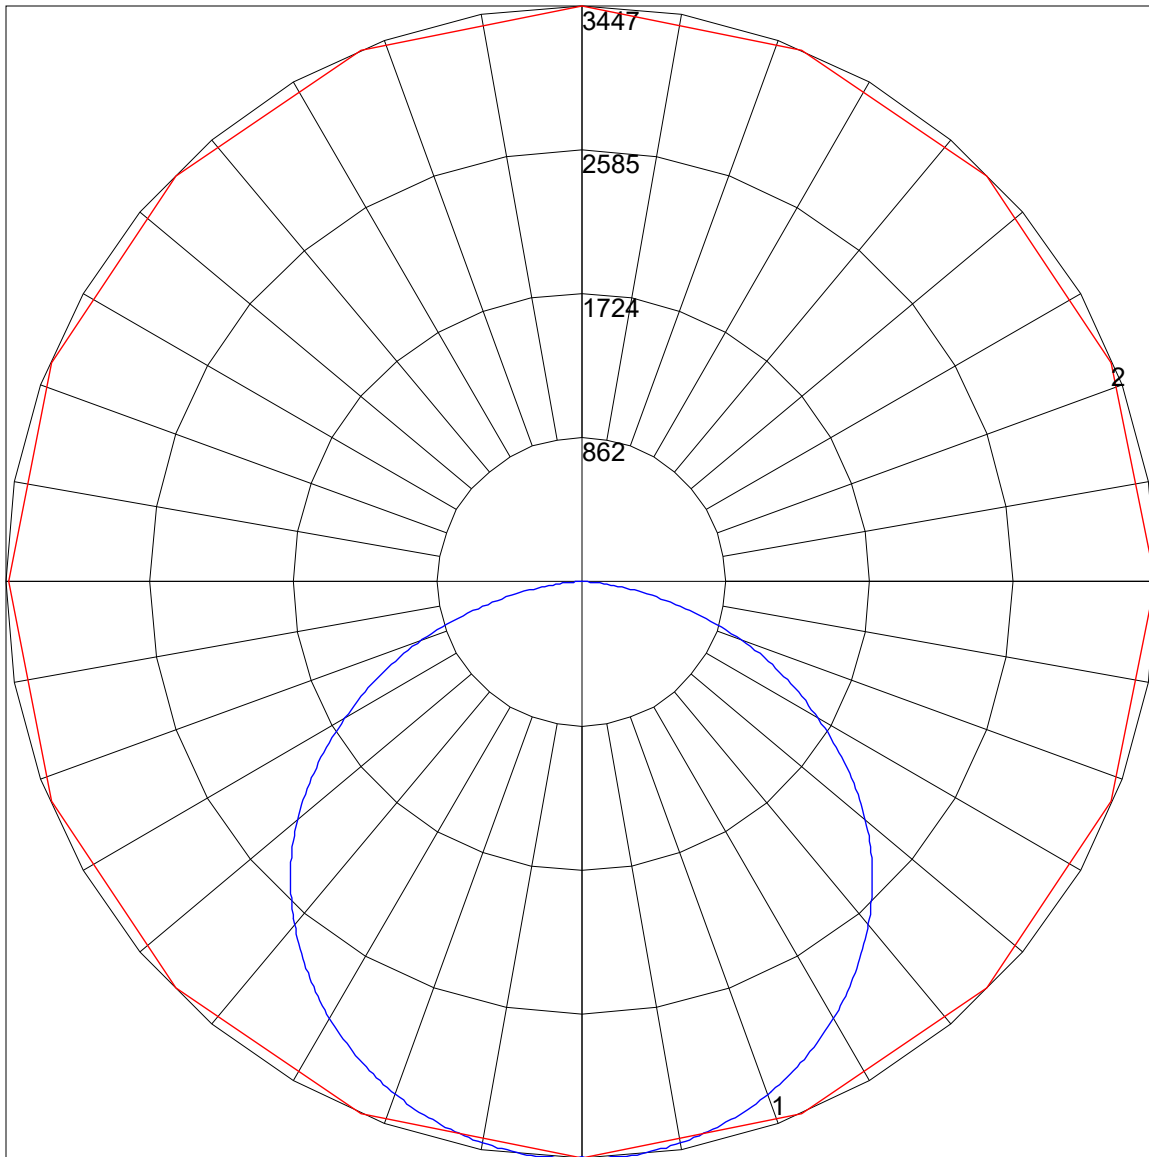

Maximum Candela = 3447.199 Located At Horizontal Angle = 90, Vertical Angle = 2.5  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)