



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV FR 930 @1200MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-018(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 8 SEL75 UV FR 930

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Four LS3872A 48 LED boards, 3000K

[BALLAST] One KTLD-75-UV-PS1400-54-VDIM-LM2 LED driver set to 1200mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	9082
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	155
Total Luminaire Watts	58.6
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	8.00 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.06 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	9640	9254	9200
55	8430	8413	8450
65	6812	7376	7459
75	5002	6334	6315
85	3020	5964	5539

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV FR 930 @1200MA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	1129.1	N.A.	12.40
0-30	2401.14	N.A.	26.40
0-40	3931.62	N.A.	43.30
0-60	6891.88	N.A.	75.90
0-80	8591.12	N.A.	94.60
0-90	8919.52	N.A.	98.20
10-90	8627.96	N.A.	95.00
20-40	2802.53	N.A.	30.90
20-50	4372.91	N.A.	48.20
40-70	4006.61	N.A.	44.10
60-80	1699.25	N.A.	18.70
70-80	652.89	N.A.	7.20
80-90	328.39	N.A.	3.60
90-110	161.88	N.A.	1.80
90-120	162.21	N.A.	1.80
90-130	162.21	N.A.	1.80
90-150	162.21	N.A.	1.80
90-180	162.21	N.A.	1.80
110-180	0.33	N.A.	0.00
0-180	9081.73	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	291.56
10-20	837.54
20-30	1272.04
30-40	1530.48
40-50	1570.39
50-60	1389.86
60-70	1046.36
70-80	652.89
80-90	328.39
90-100	131.64
100-110	30.24
110-120	0.33
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV FR 930 @1200MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	81
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	76	73	69	67
3	89	78	70	63	86	77	69	63	73	67	61	70	65	60	67	63	59	56
4	82	69	60	54	79	68	60	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34	32
8	60	46	38	32	58	45	37	32	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23


IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 8 SEL75 UV FR 930 @1200MA.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	18.3	19.9	18.7	20.3	20.6	20.0	21.6	20.4	22.0	22.3
	3H	19.6	21.1	20.0	21.4	21.8	22.0	23.5	22.4	23.8	24.2
	4H	20.0	21.4	20.4	21.8	22.2	22.8	24.2	23.3	24.6	25.0
	6H	20.2	21.5	20.7	21.9	22.4	23.6	24.9	24.1	25.3	25.8
	8H	20.3	21.5	20.7	21.9	22.4	24.0	25.3	24.5	25.7	26.1
	12H	20.3	21.5	20.8	21.9	22.4	24.4	25.6	24.9	26.0	26.5
4H	2H	19.1	20.5	19.6	20.9	21.3	20.5	21.9	20.9	22.2	22.7
	3H	20.7	21.9	21.1	22.3	22.7	22.7	23.9	23.1	24.3	24.7
	4H	21.2	22.3	21.7	22.7	23.2	23.7	24.8	24.2	25.2	25.7
	6H	21.6	22.5	22.0	23.0	23.5	24.7	25.6	25.2	26.1	26.6
	8H	21.6	22.5	22.1	23.0	23.5	25.1	26.0	25.6	26.5	27.0
	12H	21.7	22.5	22.2	23.0	23.5	25.7	26.4	26.2	27.0	27.5
8H	4H	21.8	22.6	22.3	23.1	23.6	23.9	24.8	24.4	25.3	25.8
	6H	22.3	23.0	22.8	23.5	24.1	25.1	25.8	25.6	26.3	26.9
	8H	22.5	23.1	23.0	23.7	24.2	25.7	26.3	26.2	26.9	27.4
	12H	22.6	23.2	23.1	23.7	24.3	26.3	26.9	26.9	27.4	28.0
12H	4H	21.9	22.7	22.4	23.2	23.7	23.9	24.7	24.5	25.3	25.8
	6H	22.5	23.2	23.1	23.7	24.3	25.2	25.8	25.7	26.3	26.9
	8H	22.8	23.3	23.3	23.9	24.5	25.8	26.4	26.3	26.9	27.5

Maximum UGR = 28.0

POLAR GRAPH

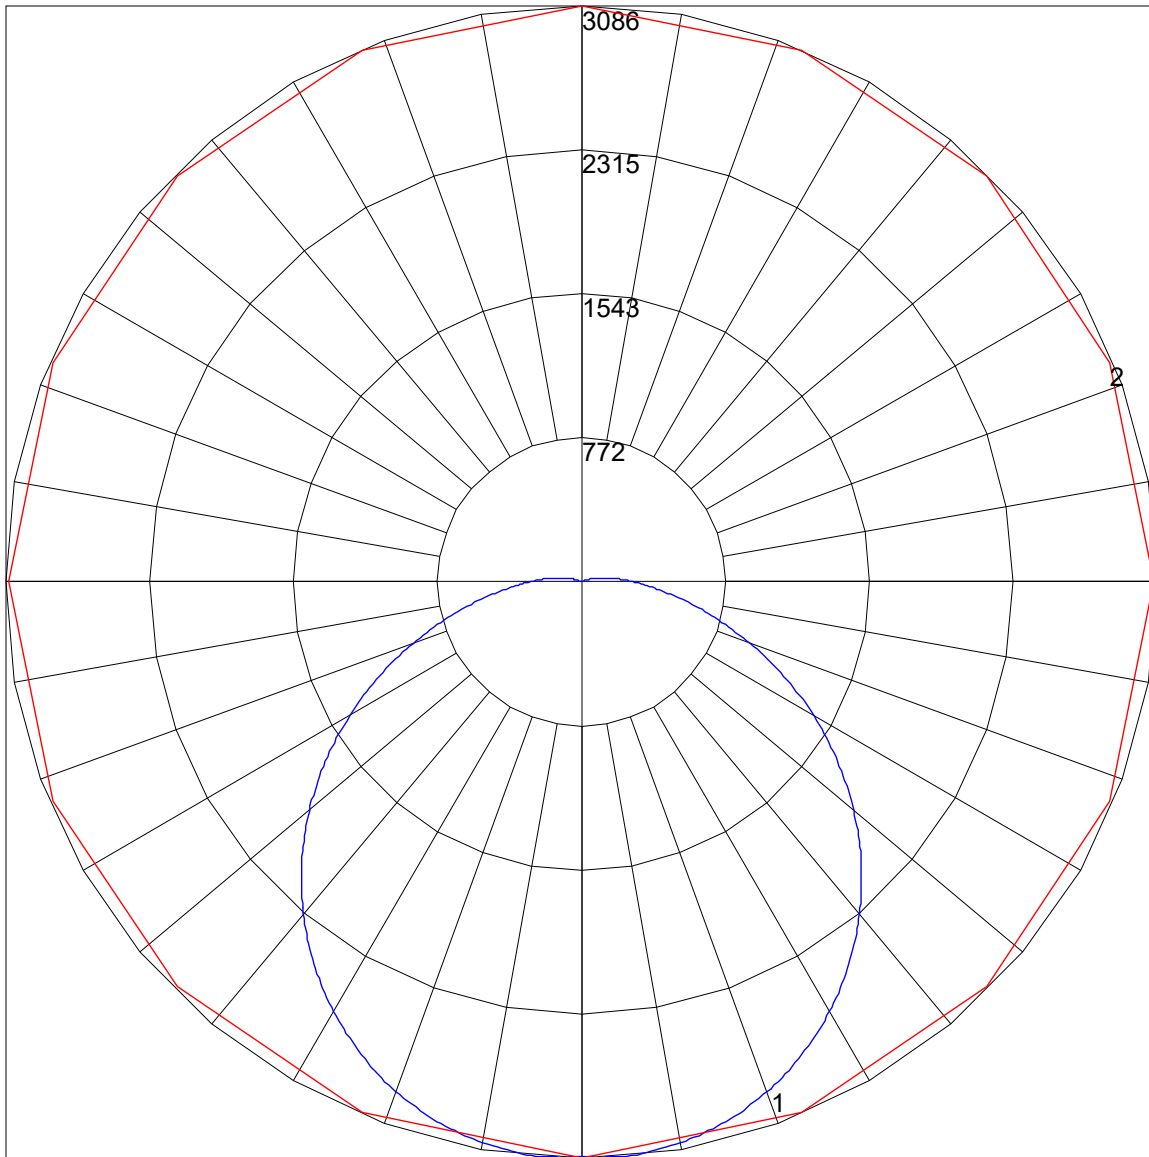

Maximum Candela = 3086.141 Located At Horizontal Angle = 90, Vertical Angle = 3.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (3.5) (Through Max. Cd.)