



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 930 @1600MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-006(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/6/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL N G2 6 SEL100 UV FR 930

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Three LS3872A 64 LED boards, 3000K

[BALLAST] One KTLD-100-UV-PS1800-54-VDIM-LM2 LED driver set at 1600mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	11773
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	148
Total Luminaire Watts	79.6
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	5.84 ft
Luminous Width (90-270)	0.21 ft
Luminous Height	0.06 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	30185	26887	26106
55	26268	23747	23121
65	21122	19934	19400
75	15453	15937	15200
85	9217	12918	11523

IES INDOOR REPORT**PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 930 @1600MA.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1443.33	N.A.	12.30
0-30	3069.05	N.A.	26.10
0-40	5024.79	N.A.	42.70
0-60	8806.74	N.A.	74.80
0-80	10972.26	N.A.	93.20
0-90	11394.35	N.A.	96.80
10-90	11021.53	N.A.	93.60
20-40	3581.47	N.A.	30.40
20-50	5588.65	N.A.	47.50
40-70	5115.81	N.A.	43.50
60-80	2165.52	N.A.	18.40
70-80	831.66	N.A.	7.10
80-90	422.09	N.A.	3.60
90-110	283.55	N.A.	2.40
90-120	331.00	N.A.	2.80
90-130	356.09	N.A.	3.00
90-150	374.91	N.A.	3.20
90-180	378.21	N.A.	3.20
110-180	94.66	N.A.	0.80
0-180	11772.56	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	372.83
10-20	1070.5
20-30	1625.72
30-40	1955.74
40-50	2007.18
50-60	1774.77
60-70	1333.86
70-80	831.66
80-90	422.09
90-100	191.38
100-110	92.17
110-120	47.45
120-130	25.09
130-140	12.84
140-150	5.98
150-160	2.56
160-170	0.74
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 930 @1600MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	107	102	98	94	104	100	96	92	95	91	88	90	88	85	86	84	82	80
2	97	89	82	76	94	87	80	75	83	77	73	79	74	70	75	72	68	66
3	89	78	70	63	86	76	69	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	68	59	53	65	57	52	62	56	51	59	54	50	47
5	75	62	53	46	72	60	52	46	58	50	45	56	49	44	53	48	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	44	39	48	43	38	36
7	64	50	42	35	62	49	41	35	48	40	35	46	39	34	44	38	34	32
8	60	46	37	32	58	45	37	31	44	36	31	42	35	31	41	35	30	28
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 930 @1600MA.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise


X=2H	Y=2H	21.7	23.2	22.1	23.6	24.0	23.7	25.3	24.1	25.7	26.1
	3H	22.9	24.3	23.3	24.7	25.1	25.7	27.1	26.1	27.5	27.9
	4H	23.2	24.6	23.7	25.0	25.4	26.5	27.9	27.0	28.3	28.7
	6H	23.4	24.7	23.9	25.1	25.6	27.3	28.6	27.8	29.0	29.5
	8H	23.4	24.7	23.9	25.1	25.6	27.7	28.9	28.2	29.4	29.8
	12H	23.5	24.6	23.9	25.1	25.6	28.1	29.3	28.6	29.7	30.2

UGR Viewed Endwise

4H	2H	22.5	23.9	23.0	24.3	24.7	24.1	25.5	24.6	25.9	26.3
	3H	23.9	25.1	24.4	25.5	26.0	26.3	27.5	26.8	27.9	28.4
	4H	24.4	25.5	24.9	25.9	26.4	27.3	28.3	27.8	28.8	29.3
	6H	24.7	25.6	25.2	26.1	26.7	28.3	29.2	28.8	29.7	30.2
	8H	24.8	25.6	25.3	26.1	26.7	28.7	29.6	29.2	30.1	30.6
	12H	24.8	25.6	25.3	26.1	26.7	29.2	30.0	29.7	30.5	31.1
8H	4H	25.0	25.8	25.5	26.3	26.9	27.5	28.4	28.0	28.8	29.4
	6H	25.4	26.1	26.0	26.7	27.2	28.6	29.3	29.1	29.9	30.4
	8H	25.6	26.2	26.1	26.8	27.3	29.2	29.8	29.7	30.4	30.9
	12H	25.7	26.2	26.2	26.8	27.4	29.8	30.4	30.4	30.9	31.6
12H	4H	25.1	25.9	25.6	26.4	26.9	27.5	28.3	28.0	28.8	29.3
	6H	25.6	26.3	26.2	26.8	27.4	28.6	29.3	29.2	29.8	30.4
	8H	25.8	26.4	26.4	27.0	27.6	29.3	29.8	29.8	30.4	31.0

Maximum UGR = 31.6

POLAR GRAPH

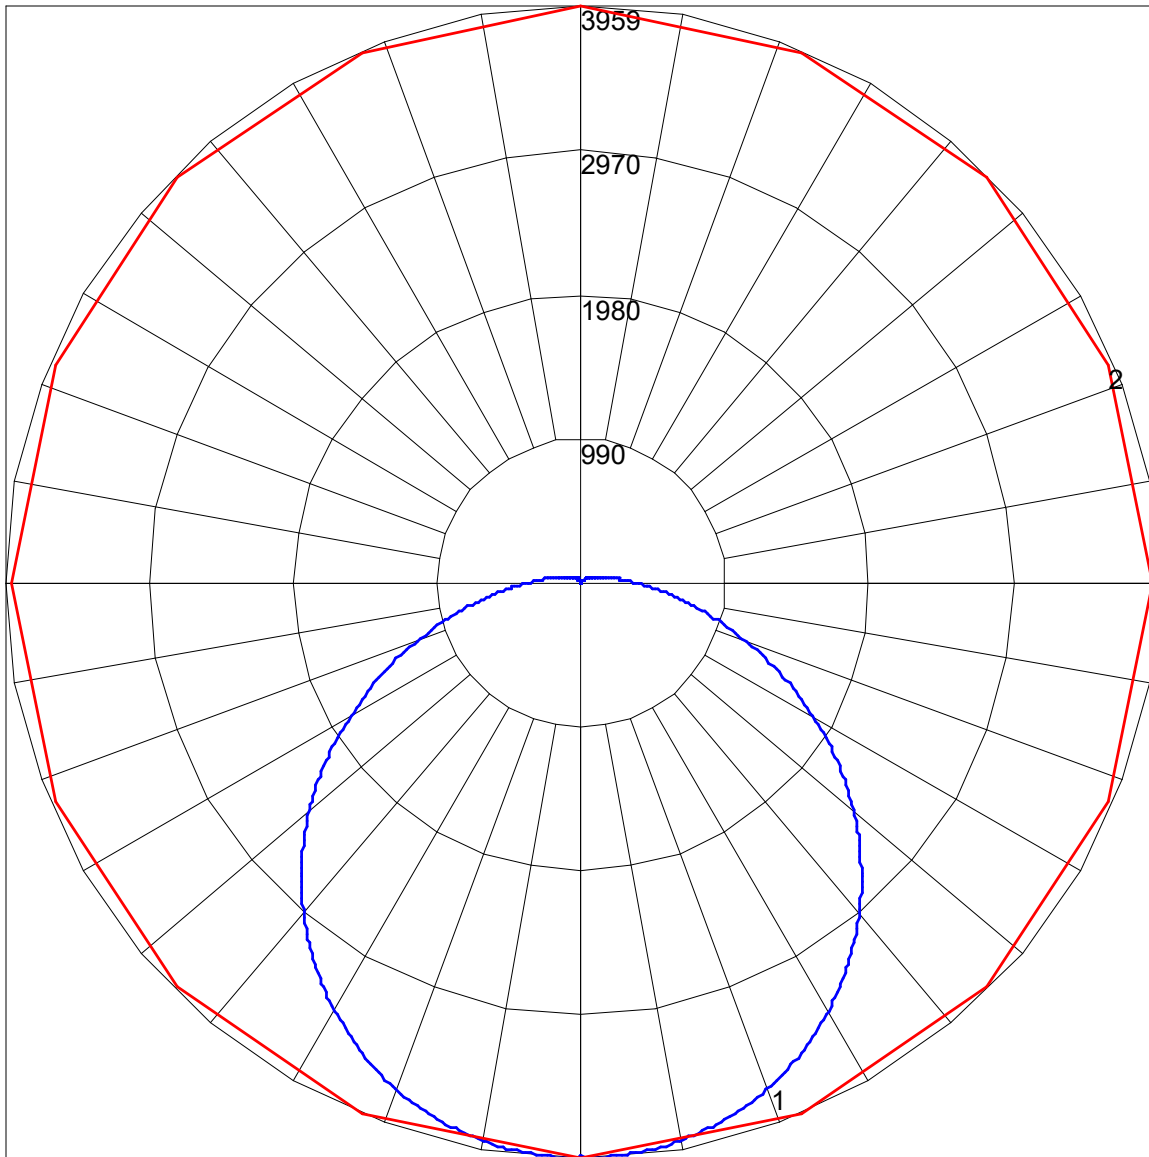

Maximum Candela = 3959.394 Located At Horizontal Angle = 90, Vertical Angle = .5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (.5) (Through Max. Cd.)