



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL25 UV FR 940 @350MA.IES

DESCRIPTION INFORMATION (From Photometric File)

[IESNA] LM-63-2002

[TEST] LLIA001735-006(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/6/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL N G2 6 SEL25 UV FR 940

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Three LS3872A 28 LED boards, 4000K

[BALLAST] One KTLD-25-UV-PS450-54-VDIM-LP2 LED driver set at 350mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2350
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	155
Total Luminaire Watts	15.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	5.84 ft
Luminous Width (90-270)	0.21 ft
Luminous Height	0.06 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6025	5366	5210
55	5243	4740	4615
65	4216	3979	3872
75	3084	3181	3034
85	1840	2578	2300

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL N G2 6 SEL25 UV FR 940 @350MA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	288.07	N.A.	12.30
0-30	612.54	N.A.	26.10
0-40	1002.88	N.A.	42.70
0-60	1757.71	N.A.	74.80
0-80	2189.92	N.A.	93.20
0-90	2274.17	N.A.	96.80
10-90	2199.75	N.A.	93.60
20-40	714.81	N.A.	30.40
20-50	1115.42	N.A.	47.50
40-70	1021.05	N.A.	43.50
60-80	432.21	N.A.	18.40
70-80	165.99	N.A.	7.10
80-90	84.24	N.A.	3.60
90-110	56.59	N.A.	2.40
90-120	66.06	N.A.	2.80
90-130	71.07	N.A.	3.00
90-150	74.83	N.A.	3.20
90-180	75.49	N.A.	3.20
110-180	18.89	N.A.	0.80
0-180	2349.65	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	74.41
10-20	213.66
20-30	324.47
30-40	390.34
40-50	400.61
50-60	354.22
60-70	266.22
70-80	165.99
80-90	84.24
90-100	38.20
100-110	18.40
110-120	9.47
120-130	5.01
130-140	2.56
140-150	1.19
150-160	0.51
160-170	0.15
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL25 UV FR 940 @350MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	107	102	98	94	104	100	96	92	95	91	88	90	88	85	86	84	82	80
2	97	89	82	76	94	87	80	75	83	77	73	79	74	70	75	72	68	66
3	89	78	70	63	86	76	69	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	68	59	53	65	57	52	62	56	51	59	54	50	47
5	75	62	53	46	72	60	52	46	58	50	45	56	49	44	53	48	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	44	39	48	43	38	36
7	64	50	42	35	62	49	41	35	48	40	35	46	39	34	44	38	34	32
8	60	46	37	32	58	45	37	31	44	36	31	42	35	31	41	35	30	28
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23


IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL N G2 6 SEL25 UV FR 940 @350MA.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size											
		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	16.1	17.6	16.5	18.0	18.4	18.1	19.7	18.5	20.1	20.5
	3H	17.3	18.7	17.7	19.1	19.5	20.1	21.5	20.5	21.9	22.3
	4H	17.6	19.0	18.1	19.4	19.8	20.9	22.3	21.4	22.7	23.1
	6H	17.8	19.1	18.3	19.5	20.0	21.7	23.0	22.2	23.4	23.9
	8H	17.8	19.1	18.3	19.5	20.0	22.1	23.3	22.6	23.8	24.2
	12H	17.9	19.0	18.3	19.5	20.0	22.5	23.7	23.0	24.1	24.6
4H	2H	16.9	18.3	17.4	18.7	19.1	18.5	19.9	19.0	20.3	20.7
	3H	18.3	19.5	18.8	19.9	20.4	20.7	21.9	21.2	22.3	22.8
	4H	18.8	19.9	19.3	20.3	20.8	21.7	22.7	22.2	23.2	23.7
	6H	19.1	20.0	19.6	20.5	21.1	22.7	23.6	23.2	24.1	24.6
	8H	19.2	20.0	19.7	20.5	21.1	23.1	24.0	23.6	24.5	25.0
	12H	19.2	20.0	19.7	20.5	21.1	23.6	24.4	24.1	24.9	25.5
8H	4H	19.4	20.2	19.9	20.7	21.3	21.9	22.8	22.4	23.2	23.8
	6H	19.8	20.5	20.4	21.1	21.6	23.0	23.7	23.5	24.3	24.8
	8H	19.9	20.6	20.5	21.2	21.7	23.6	24.2	24.1	24.8	25.3
	12H	20.1	20.6	20.6	21.2	21.8	24.2	24.8	24.8	25.3	26.0
12H	4H	19.5	20.3	20.0	20.8	21.3	21.9	22.7	22.4	23.2	23.7
	6H	20.0	20.7	20.6	21.2	21.8	23.0	23.7	23.6	24.2	24.8
	8H	20.2	20.8	20.8	21.4	22.0	23.7	24.2	24.2	24.8	25.4

Maximum UGR = 26.0

POLAR GRAPH

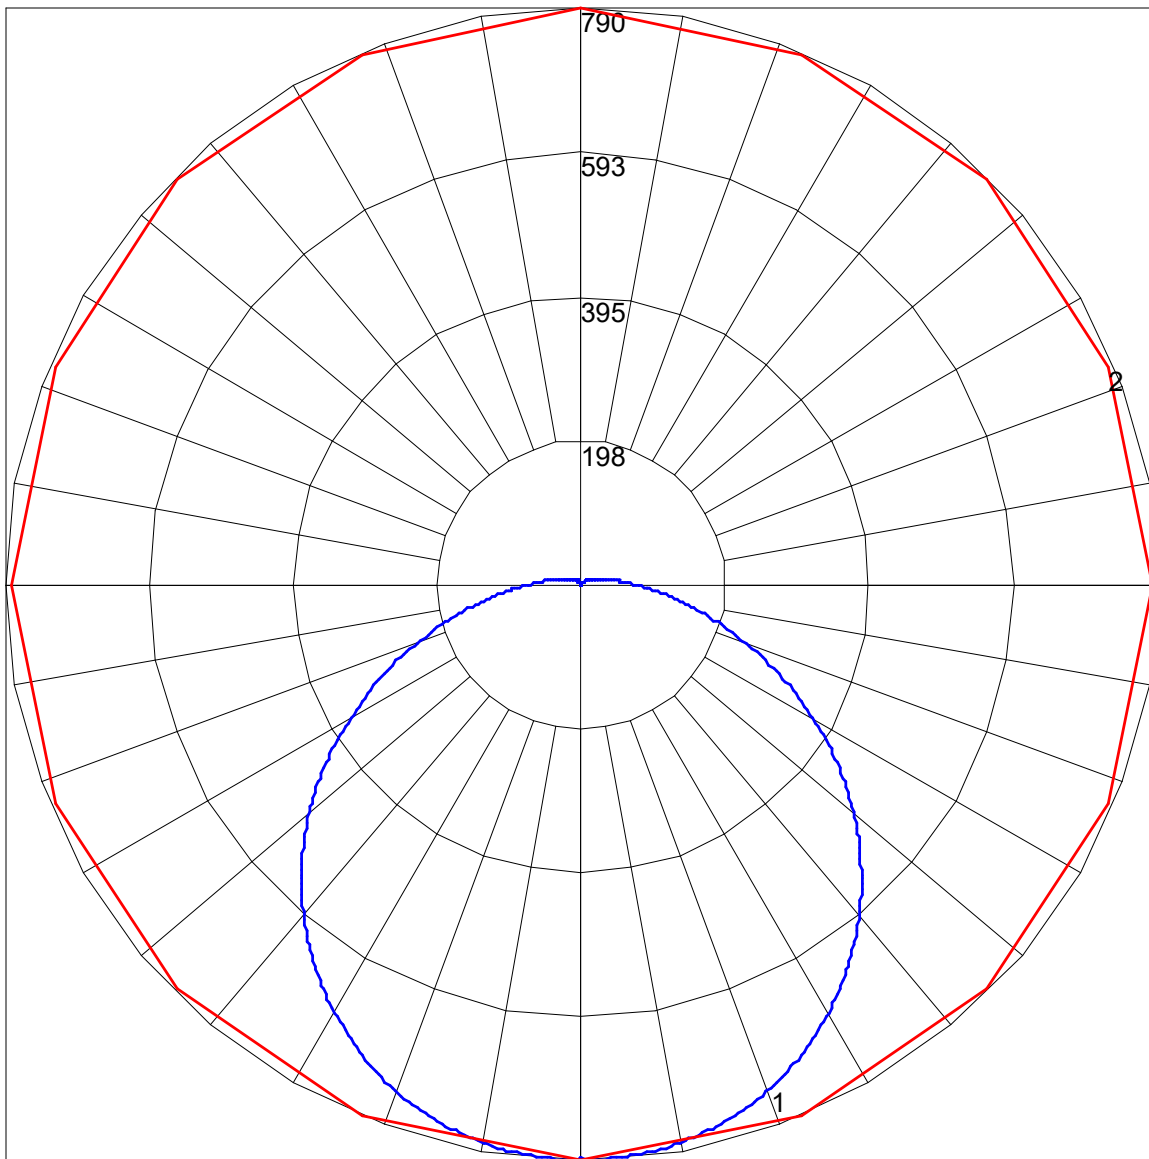

Maximum Candela = 790.244 Located At Horizontal Angle = 90, Vertical Angle = .5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (.5) (Through Max. Cd.)