



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 8 SEL25 UV FR 930 @400MA.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-006(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/6/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL N G2 8 SEL25 UV FR 930

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Four LS3872A 48 LED boards, 3000K

[BALLAST] One KTLD-25-UV-PS450-54-VDIM-LP2 LED driver set at 400mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2964
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	152
Total Luminaire Watts	19.5
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	7.67 ft
Luminous Width (90-270)	0.21 ft
Luminous Height	0.06 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5808	5168	5010
55	5059	4566	4437
65	4076	3836	3723
75	2993	3070	2917
85	1816	2494	2211

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : ECL N G2 8 SEL25 UV FR 930 @400MA.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	363.40	N.A.	12.30
0-30	772.72	N.A.	26.10
0-40	1265.13	N.A.	42.70
0-60	2217.35	N.A.	74.80
0-80	2762.58	N.A.	93.20
0-90	2868.85	N.A.	96.80
10-90	2774.98	N.A.	93.60
20-40	901.74	N.A.	30.40
20-50	1407.1	N.A.	47.50
40-70	1288.05	N.A.	43.50
60-80	545.23	N.A.	18.40
70-80	209.39	N.A.	7.10
80-90	106.27	N.A.	3.60
90-110	71.39	N.A.	2.40
90-120	83.34	N.A.	2.80
90-130	89.66	N.A.	3.00
90-150	94.39	N.A.	3.20
90-180	95.22	N.A.	3.20
110-180	23.83	N.A.	0.80
0-180	2964.08	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	93.87
10-20	269.53
20-30	409.32
30-40	492.41
40-50	505.36
50-60	446.85
60-70	335.84
70-80	209.39
80-90	106.27
90-100	48.19
100-110	23.21
110-120	11.95
120-130	6.32
130-140	3.23
140-150	1.51
150-160	0.65
160-170	0.19
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : ECL N G2 8 SEL25 UV FR 930 @400MA.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	107	102	98	94	104	100	96	92	95	91	88	90	88	85	86	84	82	80
2	97	89	82	76	94	87	80	75	83	77	73	79	74	70	75	72	68	66
3	89	78	70	63	86	76	69	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	68	59	53	65	57	52	62	56	51	59	54	50	47
5	75	62	53	46	72	60	52	46	58	50	45	56	49	44	53	48	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	44	39	48	43	38	36
7	64	50	42	35	62	49	41	35	48	40	35	46	39	34	44	38	34	32
8	60	46	37	32	58	45	37	31	44	36	31	42	35	31	41	35	30	28
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 8 SEL25 UV FR 930 @400MA.IES

## UGR TABLE - CORRECTED

### Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

### Room Size UGR Viewed Crosswise

X=2H	Y=2H	15.9	17.5	16.3	17.9	18.3	18.0	19.6	18.4	19.9	20.3
	3H	17.1	18.6	17.6	19.0	19.4	20.0	21.4	20.4	21.8	22.2
	4H	17.5	18.8	17.9	19.2	19.7	20.8	22.2	21.3	22.6	23.0
	6H	17.7	18.9	18.1	19.4	19.8	21.6	22.9	22.1	23.3	23.8
	8H	17.7	18.9	18.2	19.4	19.8	22.0	23.2	22.5	23.6	24.1
	12H	17.7	18.9	18.2	19.3	19.8	22.4	23.5	22.9	24.0	24.5

### UGR Viewed Endwise


4H	2H	16.8	18.1	17.2	18.5	19.0	18.4	19.7	18.8	20.2	20.6
	3H	18.2	19.4	18.7	19.8	20.3	20.6	21.7	21.0	22.2	22.7
	4H	18.7	19.7	19.2	20.2	20.7	21.6	22.6	22.1	23.1	23.6
	6H	19.0	19.9	19.5	20.4	20.9	22.5	23.5	23.0	24.0	24.5
	8H	19.0	19.9	19.5	20.4	20.9	23.0	23.9	23.5	24.4	24.9
	12H	19.1	19.9	19.6	20.4	20.9	23.5	24.3	24.0	24.8	25.4

8H	4H	19.2	20.1	19.7	20.6	21.1	21.8	22.6	22.3	23.1	23.7
	6H	19.7	20.4	20.2	21.0	21.5	22.9	23.6	23.4	24.1	24.7
	8H	19.8	20.5	20.4	21.0	21.6	23.4	24.1	24.0	24.7	25.2
	12H	19.9	20.5	20.5	21.0	21.7	24.1	24.7	24.6	25.2	25.8

12H	4H	19.3	20.1	19.9	20.7	21.2	21.8	22.5	22.3	23.1	23.6
	6H	19.9	20.5	20.4	21.1	21.7	22.9	23.6	23.5	24.1	24.7
	8H	20.1	20.7	20.7	21.2	21.9	23.5	24.1	24.1	24.7	25.3

Maximum UGR = 25.8

POLAR GRAPH

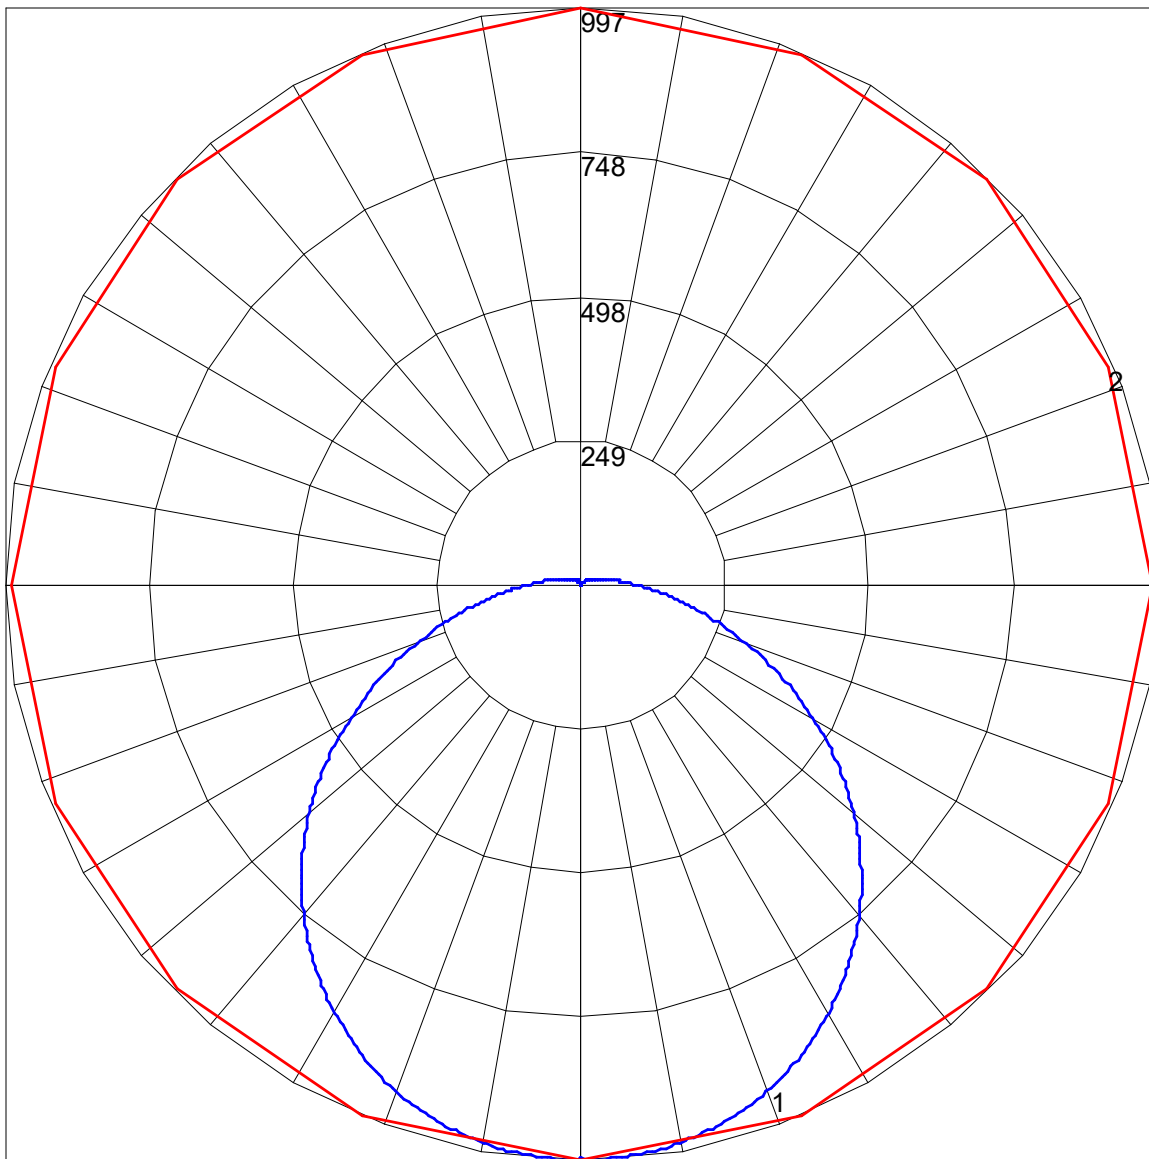

Maximum Candela = 996.89 Located At Horizontal Angle = 90, Vertical Angle = .5  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (.5) (Through Max. Cd.)