

Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

T-LED
 TYPE - C

EWC S | Type C T-LED Slim Wrap

Features:

- Type C T8 LED tubes with external driver
- 0-10V dimming drivers standard, down to 10%
- Control options available
- Can be surface, stem, or cable mounted as individual units or in continuous rows

Applications:

Suitable for most commercial, industrial and institutional applications

- Warehouse
- Manufacturing Facility
- Stock Room
- Classroom

Ambient Operating Temp.:

- -20°C to 45°C

Predicted Lifetime:

- Driver Rated Life: 70,000 hrs
- L70: ≥ 70,000 hrs

Construction:

- Die-formed heavy-gauge cold rolled steel
- Pre-painted with a highly durable, highly reflective white finish
- Frosted Acrylic Lens

Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations



Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions.
- Lamps: 7 year standard warranty, 10 year extended limited warranty based on depreciated value after 7 yrs, max 6,130 hrs/yr - see Keystone Tech's website for complete warranty terms and conditions.
- Drivers: 7 year standard warranty, 10 year extended limited warranty based on depreciated value after 7 yrs, max 4,380 hrs/yr - see Keystone Tech's website for complete warranty terms and conditions.

10 YEAR
 EXTENDED
 WARRANTY



Ordering Guide:

example: EWC S 4 2 12T84LED UV 1ED FA 840 QC ZOFD1

Series	Length	# Lamps ⁽¹⁾	Lamp Type	Voltage	Driver	Shielding	CRI/CCT	Hanging	Controls	Options
EWC S				UV		FA				
EWC S Type C T-LED Slim Wrap	2 2'	1 1 Lamp	8T82LED 2; 8W T8 LED Type C Lamp ⁽²⁾	UV 120-277	1ED 1 Electronic Driver	FA Frosted Acrylic	830 80+ CRI / 3000K	Blank None	Blank No Controls	Blank No Options
	3 3'	2 2 Lamps	12T83LED 3; 12W T8 LED Type C Lamp		2ED 2 Electronic Drivers ⁽³⁾		835 80+ CRI / 3500K	V-Chain Hangers	ZOS Occupancy Sensor (On/Off) ⁽⁴⁾	F Fuse
	3T 3' Tandem, 6' Total						840 80+ CRI / 4000K	10' Quick Hang Cable Kit	ZOFD1 Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping (120-277V) ⁽⁴⁾	EM6 6.5W Emergency Pack ⁽⁶⁾
	4 4'		10T84LED 4; 10W T8 LED Type C Lamp				850 80+ CRI / 5000K	15' Quick Hang Cable Kit	ZOFDU Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping, Scheduling (120-480V) ⁽⁴⁾	EM10 10W Emergency Pack ⁽⁶⁾
4T 4' Tandem, 8' Total			12T84LED 4; 12W T8 LED Type C Lamp				QC20 20' Quick Hang Cable Kit	EM14 14W Emergency Pack ⁽⁶⁾		
			13.5T84LED 4; 13.5W T8 LED Type C Lamp ⁽²⁾					SDT(480V) 480V to 277V Step Down Transformer	LVL 0-10V Dimming Leads for Easy Field Access	
								Z211BL_ Wattstopper FSP Programmable Photo/Motion Multi-Voltage Sensor (high/low/off) ⁽⁵⁾		
								Z311BL_ Wattstopper FSP Bluetooth- enabled Programmable Photo/Motion Multi-Voltage Sensor (high/low/off) ⁽⁵⁾		

Notes


- ⁽¹⁾ # of lamps is for the profile of the fixture.
(ex. EWC S 4T 1 10T84LED has 1 lamp per 4' section, 2 lamps total)
- ⁽²⁾ Not available in 3000K.
- ⁽³⁾ Not available for single lamp configurations.
- ⁽⁴⁾ See page 4 for more details.
- ⁽⁵⁾ " - " = lens type. See page 4 for more details.
- ⁽⁶⁾ 0°C-55°C ambient. EM wattage must not be greater than total luminaire lamp wattage.
(ex. If luminaire contains a single 8W lamp, EM pack must be ≤ 8W. For two 8W lamps, EM pack must be ≤ 16W.)

Controls Accessories (order separately)




For WattStopper Z221L_Sensor
FSIR-100 Wireless IR Programming Tool

Schematic:

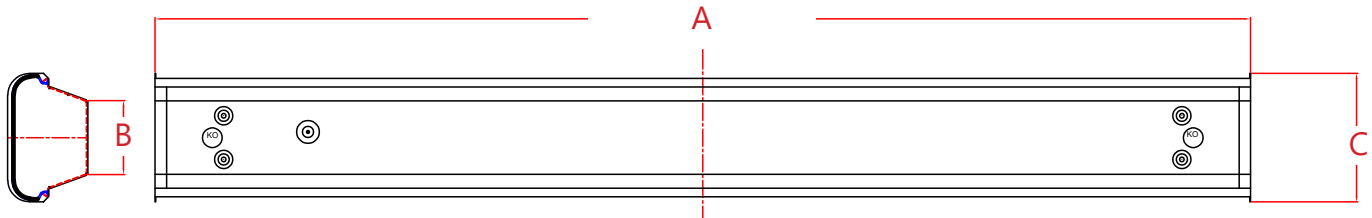

Fixture Length	A	B	C
EWC S 2'	24"	3.234"	5.6"
EWC S 3'	36"	3.234"	5.6"
EWC S 4'	48"	3.234"	5.6"
EWC S 3T	72"	3.234"	5.6"
EWC S 4T	96"	3.234"	5.6"



Lamp Chart:

Lamp Type	Nominal Length	System Watts (per lamp)	Lumens per Lamp (3000K)	Lumens per Lamp (3500K)	Lumens per Lamp (4000K)	Lumens per Lamp (5000K)	Rated Life (L70)	Warranty
8T82LED	24"	9	N/A	1,125	1,150	1,200	70,000 hrs	10 Years*
12T83LED	36"	13	1,680	1,680	1,730	1,780	70,000 hrs	10 Years*
10T84LED	48"	11.5	1,600	1,625	1,650	1,700	70,000 hrs	10 Years*
12T84LED	48"	13	1,700	1,700	1,750	1,800	70,000 hrs	10 Years*
13.5T84LED	48"	15	N/A	2,100	2,200	2,200	70,000 hrs	10 Years*

* 7 yr standard warranty. 10 yr extended limited warranty up to 6,130 operating hours per year, prorated after 7 yrs. See Keystone Tech.'s website for complete warranty terms and conditions.

Controls Summary:

Control Code	Type	Capabilities	Communication
ZOS	Motion (PIR)	On/Off	Wired
ZOFD1	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim, Grouping	Wired 0-10V, Programmable via Bluetooth App (iOS, Android)
ZOFDU	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim, Grouping, Scheduling	Wired 0-10V, Programmable via Bluetooth App (iOS, Android)
Z211BLx	Motion (PIR), Photosensor	High/Low/Off, High-End Trim	Wired 0-10V, Programmable via IR remote (sold separately)
Z311BLx	Motion (PIR), Daylight Harvesting	High/Low/Off, High-End Trim	Wired 0-10V, Programmable via Bluetooth App (iOS, Android)

On/Off Occupancy Sensor (ZOS)

The Leviton OSFHU-ITW (or equivalent) is an end mounted PIR On/Off motion sensor. It comes with two interchangeable lenses: Low Bay (8-25' heights), High Bay (20-40' heights), as well as an aisle mask.

- IP44 rated



Dimming Sensors (Z211B/Z311B)

- The Wattstopper FSP sensor provides multi-level control based on motion and/or daylight contribution
- Comes pre-installed on the fixture
- Rated for cold locations
- Parameters for Bluetooth-enabled Z311 adjustable via phone app - iOS or Android
- Parameters for Z211 adjustable via wireless configuration tool (FSIR-100 - sold separately)
- Available with black lens for black finishes (pictured right)
- Two lenses available, tailored for the ideal detection area and mounting height:
 - L2: 360° lens, maximum coverage 48', diameter from 8' height
 - L3: 360° lens, maximum coverage 40', diameter from 20' height
 - L7: 360° lens, maximum coverage 100', diameter from 40' height



Phone app interface for Z311B sensor

Smart Sensors (ZOFDx)

- Leviton Smart IP66 passive infrared (PIR) sensors
- Features mesh grouping (16 devices per group), occupancy sensing, daylight harvesting, scheduling (for ZOSFUDU only), single-level switching
- Comes pre-installed on the end of the luminaire
- Rated for cold locations
- Configurable through the Leviton Smart Sensor App using a smartphone or other Bluetooth-enabled iOS or Android device

The ZOFD option includes four sensor lenses that can easily be installed or swapped out in the field. From left: the high bay lens (20'-40' mounting), the high bay lens with aisleway mask, the low bay lens (8'-20' mounting), and the low bay lens with aisleway mask.

