



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : DLR V2 6 MD 12 WB 9SEL [2700K].IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST]

[TESTLAB] ASD LIGHTING CORP

[TESTDATE] 2022-02-28

[ISSUEDATE] 2022-02-28 14:57:39

[LAMPPOSITION] 0,0

[OTHER] EVERFINE GO-2000B\_V1 SYSTEM

[MANUFAC] LumenFocus, LLC.

[LUMCAT] DLR v2 6 MD 12 WB 9SEL [2700K]

[LUMINAIRE] LED 6IN CCT-SELECT RETROFIT CAN/15W/27-50K/DIMM/120V/MED

[LAMPCAT]

### CHARACTERISTICS

Lumens Per Lamp	1000 (1 lamp)
Total Lamp Lumens	1000
Luminaire Lumens	1000
Total Luminaire Efficiency	100 %
Luminaire Efficacy Rating (LER)	69
Total Luminaire Watts	14.58
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.52 m (Diameter)
Luminous Width (90-270)	0.52 m (Diameter)
Luminous Height	0.00 m

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1623	1677	1720
55	1434	1559	1650
65	892	1168	1423
75	185	299	625
85	72	132	227

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : DLR V2 6 MD 12 WB 9SEL [2700K].IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	140.18	14.00	14.00
0-30	297.98	29.80	29.80
0-40	488.68	48.90	48.90
0-60	856.36	85.60	85.60
0-80	987.27	98.70	98.70
0-90	990.58	99.10	99.10
10-90	954.33	95.40	95.40
20-40	348.50	34.90	34.90
20-50	545.57	54.60	54.60
40-70	471.93	47.20	47.20
60-80	130.90	13.10	13.10
70-80	26.66	2.70	2.70
80-90	3.31	0.30	0.30
90-110	1.39	0.10	0.10
90-120	2.62	0.30	0.30
90-130	4.10	0.40	0.40
90-150	7.08	0.70	0.70
90-180	9.37	0.90	0.90
110-180	7.98	0.80	0.80
0-180	999.95	100.00	100.00

Total Luminaire Efficiency = 100.00%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	36.25
10-20	103.93
20-30	157.80
30-40	190.69
40-50	197.07
50-60	170.61
60-70	104.25
70-80	26.66
80-90	3.31
90-100	0.51
100-110	0.87
110-120	1.23
120-130	1.48
130-140	1.55
140-150	1.44
150-160	1.20
160-170	0.81
170-180	0.29

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : DLR V2 6 MD 12 WB 9SEL [2700K].IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	110	106	102	99	107	104	100	97	99	96	94	95	93	91	91	90	88	86
2	101	93	87	82	98	91	86	81	88	83	79	84	80	77	81	78	75	73
3	92	83	75	69	90	81	74	68	78	72	67	75	70	66	72	68	65	62
4	85	73	65	59	82	72	64	58	69	63	58	67	61	57	65	60	56	54
5	78	66	57	51	76	65	57	51	62	55	50	60	54	49	58	53	49	47
6	72	59	51	45	70	58	50	44	56	49	44	55	48	43	53	47	43	41
7	67	54	45	39	65	53	45	39	51	44	39	50	43	38	48	43	38	36
8	62	49	41	35	61	48	40	35	47	40	35	46	39	34	44	39	34	32
9	58	45	37	32	57	44	37	31	43	36	31	42	36	31	41	35	31	29
10	54	42	34	29	53	41	34	29	40	33	28	39	33	28	38	32	28	26

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : DLR V2 6 MD 12 WB 9SEL [2700K].IES**

**UGR TABLE - CORRECTED**


Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	12.3	13.9	12.7	14.2	14.5	13.4	14.9	13.8	15.2	15.6
	3H	12.8	14.2	13.2	14.5	14.9	14.7	16.1	15.1	16.4	16.8
	4H	12.8	14.1	13.2	14.5	14.9	14.9	16.2	15.3	16.5	16.9
	6H	12.8	13.9	13.2	14.3	14.7	14.9	16.1	15.3	16.5	16.9
	8H	12.7	13.9	13.2	14.3	14.7	14.9	16.0	15.3	16.4	16.8
	12H	12.7	13.8	13.1	14.2	14.6	14.8	15.9	15.3	16.3	16.8
4H	2H	12.8	14.1	13.2	14.5	14.9	13.8	15.1	14.2	15.4	15.8
	3H	13.3	14.4	13.8	14.8	15.3	15.2	16.3	15.6	16.7	17.1
	4H	13.3	14.3	13.8	14.7	15.2	15.4	16.4	15.9	16.8	17.3
	6H	13.3	14.1	13.8	14.6	15.1	15.4	16.3	15.9	16.7	17.2
	8H	13.3	14.1	13.8	14.5	15.0	15.4	16.2	15.9	16.6	17.1
	12H	13.3	13.9	13.8	14.4	14.9	15.4	16.1	15.9	16.6	17.1
8H	4H	13.3	14.1	13.8	14.6	15.1	15.4	16.1	15.9	16.6	17.1
	6H	13.3	13.9	13.8	14.5	15.0	15.4	16.0	15.9	16.5	17.0
	8H	13.3	13.8	13.8	14.4	14.9	15.4	15.9	15.9	16.5	17.0
	12H	13.3	13.8	13.8	14.3	14.9	15.4	15.9	15.9	16.4	17.0
12H	4H	13.3	14.0	13.8	14.5	15.0	15.3	16.0	15.8	16.5	17.0
	6H	13.3	13.9	13.8	14.3	14.9	15.4	15.9	15.9	16.4	17.0
	8H	13.3	13.8	13.8	14.3	14.9	15.4	15.9	15.9	16.4	17.0

Maximum UGR = 17.3

POLAR GRAPH

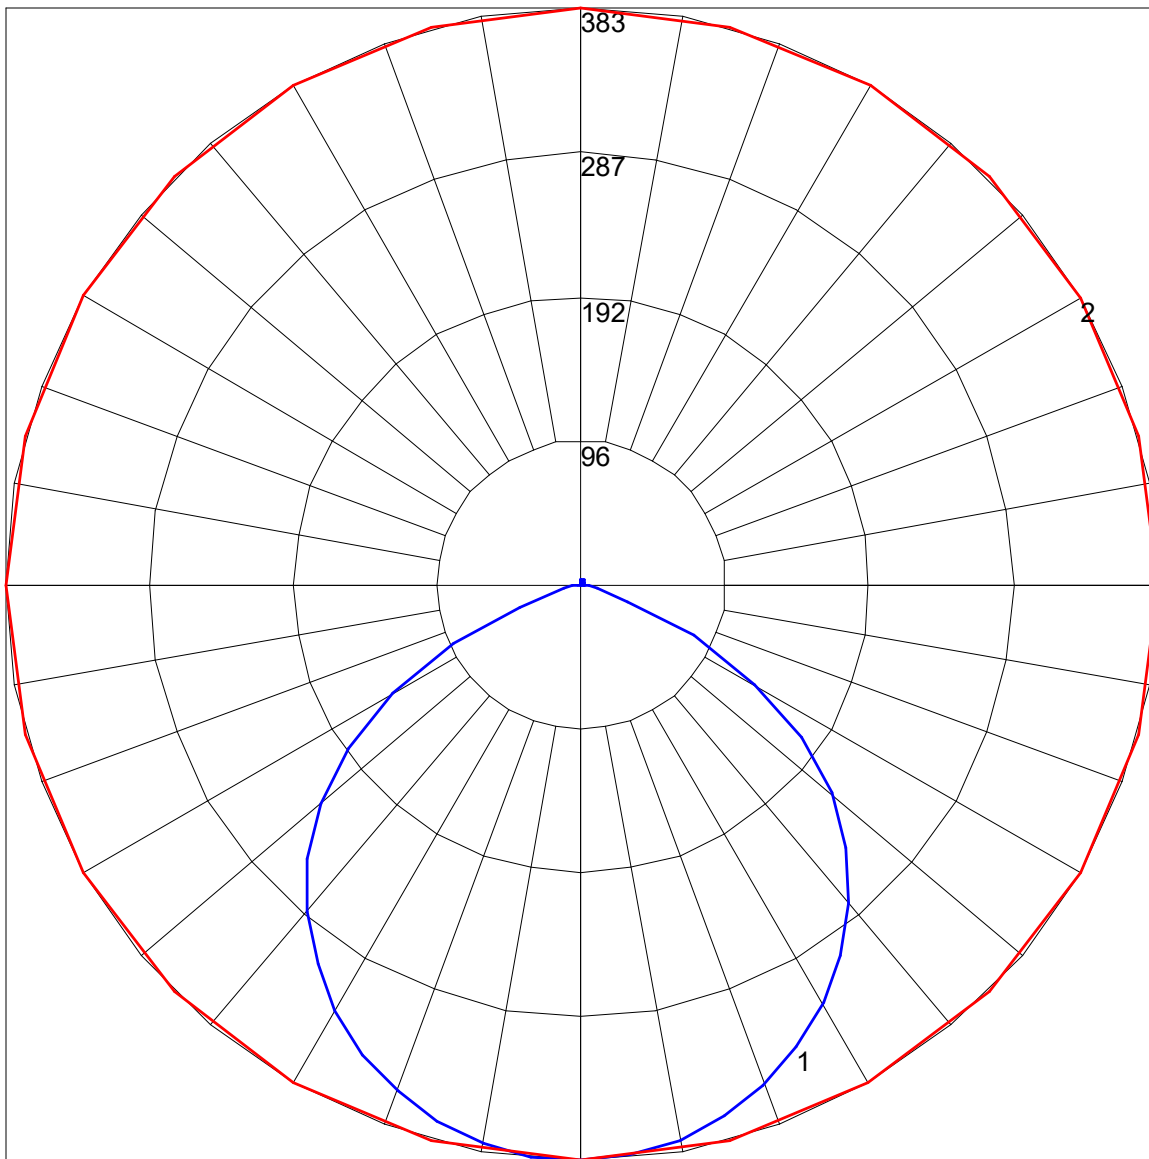

Maximum Candela = 383.168 Located At Horizontal Angle = 0, Vertical Angle = 0  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)