




Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat. #: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_



# DLR v2 6 | LED 6" Select Retrofit Down Light

## Features:

- High performance LED technology
- Dimmable - see compatibility chart on page 2
- Works for retrofit and new construction applications
- Compatible with type IC and non-IC cans
- High quality 90 CRI
- Field selectable color temperature: 2700K /3000K /3500K /4000K / 5000K



## Construction:

- Durable aluminum and polycarbonate construction
- E26 - medium base
- White finish

## Certifications:

- UL Certified for wet locations
- IP43
- RoHS compliant



## Applications:

Suitable for most commercial, industrial and institutional retrofit & new construction applications

- Retail
- Hospitals
- Offices
- Hospitality

## Predicted L70 Lifetime:

- 50,000 hrs

## Warranty:

- 5 year limited system warranty - see [www.LumenFocus.com](http://www.LumenFocus.com) for complete warranty terms and conditions

## Ambient Operating Temp:

- -20°C to 40°C



Ordering Guide:

example: DLR v2 6 MD 12 WB 9SEL

| Series   | Size           | Output              | Voltage           | Reflector Trim            | CRI/CCT  |
|--|----------------|---------------------|-------------------|---------------------------|--|
| DLR v2   | 6              | MD                  | 12                | WB                        | 9SEL   |
| <b>DLR v2</b><br>Retrofit<br>Down Light<br>Version 2 | <b>6</b><br>6" | <b>MD</b><br>Medium | <b>12</b><br>120V | <b>WB</b><br>White Baffle | <b>9SEL</b><br>90 CRI / Field Selectable CCT:<br>2700K<br>3000K<br>3500K<br>4000K<br>5000K |


Performance Chart:

| CCT   | Lumens | Watts | LPW |
|-------|--------|-------|-----|
| 2700K | 1000   | 15    | 67  |
| 3000K | 1048   | 15    | 70  |
| 3500K | 1054   | 15    | 70  |
| 4000K | 1067   | 15    | 71  |
| 5000K | 1028   | 15    | 69  |

Accessories:

**DLRGU24** Connector for GU24 base


Schematic:

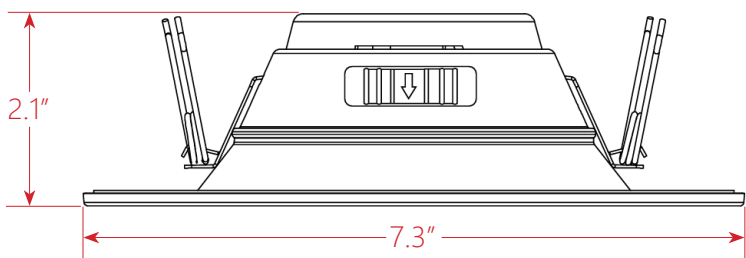

Photometric Data:

**DLR v2 6 MD 12 WB 9SEL [3000K]**

**Luminaire Lumens:** 1048 lm  
**Luminaire Watts:** 14.58 W  
**Efficacy:** 71.9 LPW  
**Beam Angle:** 111°

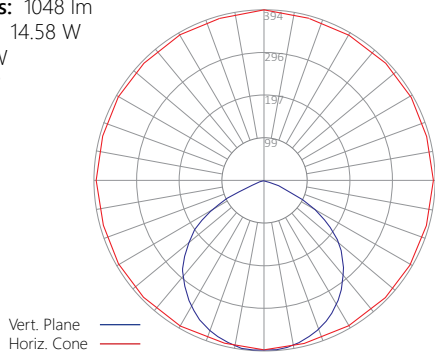

Dimming Compatibility:

| Brand   | Model          | Compatibility |
|---------|----------------|---------------|
| Lutron  | 4X603          | ✓             |
| Lutron  | CT-603PGH-WH   | ✓             |
| Lutron  | CTCL-153PDH-WH | ✓             |
| Lutron  | DV-600P        | ✓             |
| Lutron  | DVCL-153P-WH   | ✓             |
| Lutron  | DVLV-603P-IV   | ✓             |
| Lutron  | DVW-603PGH-WH  | ✓             |
| Lutron  | MACL-153M-WH   | ✓             |
| Lutron  | MALV-600       | ✗             |
| Lutron  | MALV-600-IV    | ✗             |
| Lutron  | MIR-600THW-WH  | ✗             |
| Lutron  | NT-1000        | ✗             |
| Lutron  | S-600P         | ✓             |
| Lutron  | S-600PR-WH     | ✗             |
| Lutron  | S-603P         | ✓             |
| Lutron  | SLV-600P-WH    | ✓             |
| Lutron  | SPSLV-600-WH   | ✗             |
| Leviton | 6674           | ✓             |
| Leviton | 6631           | ✓             |
| Leviton | 6672           | ✓             |
| Leviton | 6683           | ✓             |
| Leviton | 1A2305         | ✓             |
| Leviton | 1E1205         | ✗             |
| Leviton | 1F4205         | ✓             |
| Leviton | 6633-P         | ✓             |
| Leviton | DB33K1         | ✓             |
| Leviton | IPL06          | ✓             |
| Leviton | VP106          | ✗             |

✓ Compatible  
 ✗ Not Recommended

