

Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____



EWL S G2 4 | LED Slim Wrap

Features:

- High performance LED technology
- 0-10V dimming drivers standard
- DALI drivers available
- Field replaceable LED boards and drivers
- Can be surface, stem, or cable mounted as individual units or in continuous rows
- Buy American Act compliant *(All base luminaires are BAA compliant. Addition of options may change eligibility. Contact factory for details.)*

Applications:

- Suitable for industrial, retail, and institutional applications
- Warehouse
 - Manufacturing Facility
 - Stock Room
 - Classroom

Ambient Operating Temp:

- -30°C to 40°C

Predicted Lifetime:

- L70 ≥ 171,000 hrs (calculated)
- L80 ≥ 108,000 hrs (calculated)
- L90 ≥ 53,000 hrs (reported)
- 81% lumen maintenance @ 102,000 hrs *(based on LM-80, TM-21 and in-situ laboratory testing)*

Construction:

- Die-formed heavy-gauge cold rolled steel
- Pre-painted with a highly durable, highly reflective white finish
- Frosted Acrylic Lens

Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations



Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions
- 10 year warranty option available on specific models *(Not available on all models. Certain conditions apply. Consult factory or sales representative for details.)*



Ordering Guide:

example: EWL S G2 4 MD UV FA 940 QC

| Series | Version | Length | Output | Voltage | Shielding | CRI/CCT | Hanging | Controls | Options |
|--------------------|-------------|---------|-----------------|---------------|-----------------------|---------------------|----------------------------------|--|---|
| EWL S | G2 | 4 | | | FA | | | | |
| EWL S Slim Wrap | G2 Gen 2 | 4 4' | SL Super Low | UV 120-277 | FA Frosted Acrylic | 930 90 CRI/3000K | Blank None | Blank No Controls | Blank No Options |
| | | | VL Very Low | 34 347V | | 935 90 CRI/3500K | VC V-Chain Hangers | ZSOL Leviton Intellect Solo Programmable PIR/Daylight Harvesting Sensor ⁽¹⁾ | EXT10 10-Year Extended Warranty ⁽⁴⁾ |
| | | | LW Low | | | 940 90 CRI/4000K | QC 10' Quick Hang Cable Kit | ZOSMD Microwave Daylight/Motion Sensor With Step-Dimming (High/Low/Off) ⁽²⁾ | C6 6' Single Circuit Cord |
| | | | MD Medium | | | 950 90 CRI/5000K | QC15 15' Quick Hang Cable Kit | ZSLFC2 Keystone SmartLoop Wireless Bluetooth Mesh Occupancy/Daylight Harvesting Smart Sensor ⁽¹⁾ | C65W 6' Single Circuit Cord with Low Voltage Connections |
| | | | HI High | | | | QC20 20' Quick Hang Cable Kit | ZLDS Leviton Intellect DALI Sensor with Dimming/Occupancy/Daylight Harvesting with Newtork Capabilities ⁽³⁾ | C10 10' Single Circuit Cord |
| | | | VH Very High | | | | | ZL7S Leviton Intellect 0-10V Sensor with Dimming/Occupancy/Daylight Harvesting with Newtork Capabilities ⁽³⁾ | C105W 10' Single Circuit Cord with Low Voltage Connections |

Notes

- ⁽¹⁾ See Page 4 for more details.
- ⁽²⁾ 120-277V only. See Page 4 for more details.
- ⁽³⁾ See Page 5 for more details.
- ⁽⁴⁾ Not available on all models. Certain conditions apply. Consult factory or sales representative for details.
- ⁽⁵⁾ 120-277V / 0°C-55°C ambient. To estimate lumen output in emergency mode, multiply EM wattage by the Lumens per Watt of the luminaire it is installed in.
ex. EWL S G2 4 MD UV FA 940 EM10 → 151.9 LPW x 10W = 1,519 lm

Controls Accessories (order separately)



For Leviton Programmable Sensor
ZLSOR-RA1 IR Programming Remote



For Keystone SmartLoop Controls
KTS1-WS1-B-SG/G2 5-Button Bluetooth Wireless Wall Switch
KTS1-TK1-USB USB Time Keeper



For Leviton Intellect Controls
DRKDN-U1W 1-Button Wireless Wall Controller
DRKDN-U2W 2-Button Wireless Wall Controller
DRKDN-U4W 4-Button Wireless Wall Controller
DRKDN-U8W 8-Button Wireless Wall Controller




For Enlighted Controls
WS-2-00 Enlighted Remote Control Wall Switch (for Enlighted Connected & IoT)

| | |
|--|--|
| ZL7C Leviton Intellect 0-10V Fixture Controller with Newtork Capabilities ⁽³⁾ | F Fuse |
| ZENLC Enlighted Micro Sensor with Dimming/Occupancy/Daylight Harvesting and Enlighted Connected System ⁽³⁾ | EM6 6.5W Emergency Pack ⁽⁵⁾ |
| ZENLI Enlighted Micro Sensor with Dimming/Occupancy/Daylight Harvesting and Enlighted IoT System ⁽³⁾ | EM10 10W Emergency Pack ⁽⁵⁾ |
| | EM14 14W Emergency Pack ⁽⁵⁾ |
| | CC Conformal Coating |
| | LVL 0-10V Dimming Leads for Easy Field Access |
| | BAA Buy American Act Compliant |



Schematic:

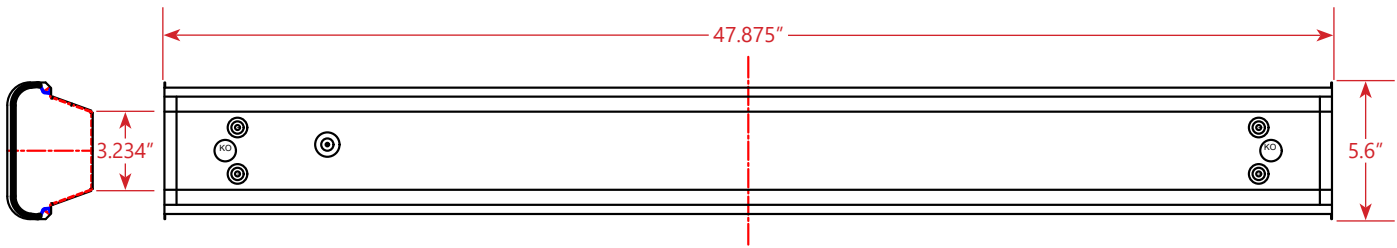

Performance Chart:

| Catalog # | Watts | Lumens (930) | LPW (930) | Lumens (935) | LPW (935) | Lumens (940) | LPW (940) | Lumens (950) | LPW (950) |
|-------------------------|-------|--------------|-----------|--------------|-----------|--------------|-----------|--------------|-----------|
| EWL S G2 4 SL UV FA 9xx | 14.8 | 2213.1 | 149.4 | 2236.1 | 151.0 | 2305.3 | 155.6 | 2328.3 | 157.2 |
| EWL S G2 4 VL UV FA 9xx | 27.8 | 4210.8 | 151.4 | 4254.6 | 153.0 | 4386.2 | 157.7 | 4430.1 | 159.3 |
| EWL S G2 4 LW UV FA 9xx | 35.1 | 5221.3 | 148.9 | 5275.7 | 150.4 | 5438.9 | 155.1 | 5493.3 | 156.6 |
| EWL S G2 4 MD UV FA 9xx | 42.6 | 6214.1 | 145.8 | 6278.8 | 147.3 | 6473.0 | 151.9 | 6537.7 | 153.4 |
| EWL S G2 4 HI UV FA 9xx | 55.9 | 8214.1 | 147.1 | 8299.6 | 148.6 | 8556.3 | 153.2 | 8641.9 | 154.7 |
| EWL S G2 4 VH UV FA 9xx | 71.6 | 10257.1 | 143.3 | 10364.0 | 144.8 | 10684.5 | 149.2 | 10791.4 | 150.7 |

Controls Summary:

| Control Code | Type | Capabilities | Communication |
|--------------|-----------------------------------|--|--|
| ZSOL | Motion (PIR), Daylight Harvesting | High/Low/Off | Wired 0-10V, Programmable via IR remote (sold separately) |
| ZOSMD | Motion (Microwave), Photosensor | On/Low/Off | Wired 1-10V |
| ZSLFC2 | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling, LLLC (Keystone Tech.-SmartLoop) | Wireless Bluetooth Mesh, Programmable via Keystone SmartLoop App for iOS or Android |
| ZLxS | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling, Demand Response*, BMS Integration*, LLLC (GreenMAX DRC) | Wireless Zigbee 2.4 GHz Mesh, Programmable via GreenMAX DRC app. for iOS or Android along with DRKDN-UxW Wall Controller (sold separately) |
| ZLxC | Controller, No Sensors | High/Low/Off, High-End Trim, Grouping, Scheduling, Demand Response*, BMS Integration*, LLLC (GreenMAX DRC) | Wireless Zigbee 2.4 GHz Mesh, Programmable via GreenMAX DRC app. for iOS or Android along with DRKDN-UxW Wall Controller (sold separately) |
| ZENLC | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling*, Energy Monitoring*, BMS Integration*, Upgradable to IoT (ZENLI), LLLC (Enlighted IoT)* | Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted IoT Software |
| ZENLI | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling*, Energy Monitoring*, BMS Integration*, LLLC (Enlighted IoT)*, Space - Building Utilization*, Where - Real Time Location Services* | Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted IoT Software |

LLLC = Luminaire Level Lighting Control
 * Additional equipment required. Contact LumenFocus representative for details



The EWL features field replaceable boards and drivers. This allows you to upgrade to more efficient technology in the future. Or, in the rare event of a failure, you can rapidly replace defective components. Re-boardABILITY helps to ensure you won't get stuck with an obsolete light fixture. [Learn more about Re-boardABILITY here.](#)



Keystone SmartLoop Wireless Control System

The SmartLoop wireless lighting control system by Keystone is a Bluetooth mesh lighting control system that allows you to set up and manage your lighting ecosystem quickly and easily. It's powerful enough to run a space with multiple lighting zones, but simple enough to program in minutes with your smart-phone – perfect for warehouses, offices, schools, and auditoriums, whether new construction or retrofit.

- Wireless Bluetooth 2.4 GHz mesh network
- Supports up to 100 devices on a single region, with unlimited regions
- Independent per-fixture control: Occupancy, Daylight Harvesting, Task Tuning, Grouping, Scene Setting, Scheduling
- Commissioned via SmartLoop mobile app for iPhone and Android



ZSLFC2



- Low voltage individual fixture controller for SmartLoop system
- Integrated daylight and PIR motion sensors
- **Up to 16' mounting height.** 16' radius at 16' height.
- Works with 0-10V dim-to-off drivers with 12V aux. power

SmartLoop Accessories

- Bluetooth Wireless Wall Switch: **KTSL-WS1-B-SG/G2**
 - Battery Powered: 2x CR2032
 - 5 Button: Power Toggle, Dimming, Automatic Sensor/Preset Level Operation, Scene Activation
- USB Time Keeper: **KTSL-TK1-USB**
 - Relays time to system components after a power loss
 - Powered by standard USB charging port
 - Internal CR1220 battery backup



Microwave Occupancy Sensor (ZOSMD)

The Leviton OSM3D-DDW (or equivalent) detects motion through low density materials using high frequency electromagnetic waves. This means it can sit discretely behind the EWL's frosted lens. The ZOSMD features automatic switching based on motion and ambient light level. ZOSMD option adds step-dimming functionality - standby dimming level 10% / 20% / 30% / 50%.

Max mounting height for ZOSMD is 40 feet.



Leviton Intellect Solo Dimming Sensor (ZSOL)

The EWL can be equipped with an integrated Leviton Intellect Solo Sensor ("ZSOL" option). This is a 0-10V dimming Passive Infrared (PIR) occupancy and daylight harvesting sensor.

Other features:

- Partial-on
- Partial-off
- **8' to 10' mounting height**
- IP20 rated
- Detection angle: 120 degrees
- IR remote available for programming sensor from the floor (sold separately)
- Can be used to comply with IECC, ASHRAE 90.1 and 2019 Title 24, Part 6 dimming, occupancy/vacancy sensing and daylight harvesting requirements.



GreenMAX DRC Wireless Networked Control System with Leviton Intellect Sensors & Controllers

The GreenMAX DRC Wireless Keypad Room Controllers are used as the brain of the system, managing the fixture integrated Leviton Intellect sensors & controllers. Wirelessly commission, configure, control, monitor and provision the GreenMAX DRC system using the GreenMAX DRC App and an Android or iOS smart device.

- Occupancy/Vacancy Sensing
- Multi-Level Lighting, Partial-On, Partial-Off
- Daylight Harvesting
- Task Tuning
- Scheduling
- Grouping
- Demand Response
- BMS Integration
- ZigBee 2.4 GHz Wireless Mesh Network
- Up to 75' between devices

* DRKDN-UxW room controller required for full functionality and programming of Intellect sensors & controllers



ZLxS

- PIR Occupancy Sensor
- Daylight Sensor
- 0-10V or DALI
- Up to 20' mounting height



ZLxC

- Wireless fixture controller, no sensor
- 0-10V or DALI



DRKDN-UxW Room Controllers



- 1-, 2-, 4-, and 8-button configurations
- Line voltage powered: 120-277V
- Max capacity: 60 devices
- Programmable: On/Off/Raise/Lower/ Toggle/Scene
- Use any Android or iOS device for configuration using the GreenMAX DRC App

Enlighted: All-in-one sensors, upgradeable systems

Enlighted's SMART Micro Sensor is an all-in-one unit: task tuning, high-end trimming, daylight harvesting, and occupancy/vacancy detection. **Max installation height is 15 feet.**


Enlighted Connected ("ZENLC") offers many features, including motion and switch groups, daylight harvesting, energy reporting, and more. The Enlighted IoT ("ZENLI") option allows the full implementation of Enlighted's services. Enlighted Connected can be fully upgraded to the next tier in the future. So if you start with ZENLC but want to add the functionality of the ZENLI option, you can.



Real-time data analytics

Enlighted's control units compile data in real-time, which can be viewed via the Energy Manager. The Energy Manager is part of the Enlighted Connected and Enlighted IoT configurations.

- Real-time measurements and verification of energy savings
- Space analytics - data can be compiled into motion trails and heat maps
- Analyze traffic density and congestion in a space

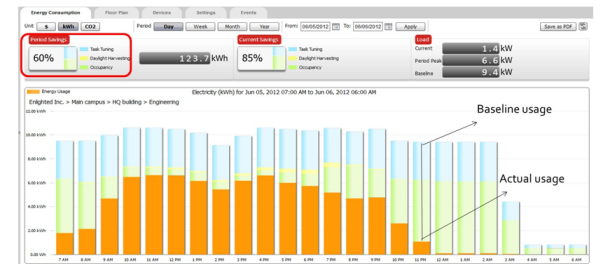

© 2024 Enlighted for all Enlighted content and images.

© 2024 Leviton Manufacturing Co. Inc. for all Leviton content and images.

| Enlighted Capabilities* | Enlighted Connected (ZENLC) | Enlighted IoT (ZENLI) |
|--|-----------------------------|-----------------------|
| Motion and Switch Groups | ✓ | ✓ |
| Daylight Harvesting | ✓ | ✓ |
| Schedule Lighting | ✓ | ✓ |
| Energy Reporting & Optimization | ✓ | ✓ |
| Environment Data & Lighting Controls API | ✓ | ✓ |
| Building Management System Integration | ✓ | ✓ |
| Where & Space Applications | | ✓ |
| Location & Occupancy APIs & Beacons | | ✓ |
| Future App & API Ready | | ✓ |




Photometric Data:

EWL S G2 4 VH UV FA 940

Test No.: LLIA002568-007A(s)
 Luminaire Lumens: 10,684 lm
 Luminaire Watts: 71.6W
 Efficacy: 149.2 LPW
 Spacing Criterion (0-180): 1.20
 Spacing Criterion (90-270): 1.28

| Luminance Data (cd/sq.m) | | | |
|--------------------------|---------------|----------------|----------------|
| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
| 45 | 16510 | 15456 | 15886 |
| 55 | 14755 | 13896 | 14729 |
| 65 | 12692 | 12187 | 13536 |
| 75 | 9914 | 10327 | 12301 |
| 85 | 4949 | 8494 | 11298 |



— Vert. Plane
 — Horiz. Cone

Coefficients Of Utilization - Zonal Cavity Method
 Effective Floor Cavity Reflectance 0.20

| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | | |
| 0 | 117 | 117 | 117 | 117 | 113 | 113 | 113 | 113 | 106 | 106 | 106 | 100 | 100 | 100 | | |
| 1 | 106 | 101 | 96 | 92 | 102 | 97 | 93 | 89 | 92 | 88 | 85 | 86 | 83 | 81 | | |
| 2 | 96 | 87 | 80 | 74 | 92 | 85 | 78 | 73 | 80 | 74 | 70 | 75 | 71 | 67 | | |
| 3 | 87 | 76 | 68 | 61 | 84 | 74 | 66 | 60 | 70 | 63 | 58 | 66 | 61 | 56 | | |
| 4 | 80 | 68 | 59 | 52 | 77 | 66 | 57 | 51 | 62 | 55 | 49 | 59 | 53 | 48 | | |
| 5 | 73 | 60 | 51 | 44 | 71 | 59 | 50 | 44 | 56 | 48 | 43 | 53 | 46 | 41 | | |
| 6 | 68 | 54 | 45 | 39 | 65 | 53 | 44 | 38 | 50 | 43 | 37 | 48 | 41 | 36 | | |
| 7 | 63 | 49 | 40 | 34 | 60 | 48 | 40 | 34 | 46 | 38 | 33 | 43 | 37 | 32 | | |
| 8 | 58 | 45 | 36 | 30 | 56 | 44 | 36 | 30 | 42 | 35 | 29 | 40 | 33 | 29 | | |
| 9 | 55 | 41 | 33 | 27 | 53 | 40 | 32 | 27 | 38 | 31 | 26 | 37 | 30 | 26 | | |
| 10 | 51 | 38 | 30 | 25 | 49 | 37 | 30 | 24 | 36 | 29 | 24 | 34 | 28 | 23 | | |

Zonal Lumen Summary

| Zone | Lumens | %Fixt |
|---------|----------|-------|
| 0-20 | 1220.68 | 11.4 |
| 0-30 | 2576.35 | 24.1 |
| 0-40 | 4188.36 | 39.2 |
| 0-60 | 7337.42 | 68.7 |
| 0-80 | 9335.00 | 87.4 |
| 0-90 | 9768.54 | 91.4 |
| 90-120 | 591.79 | 5.5 |
| 90-130 | 714.77 | 6.7 |
| 90-150 | 864.08 | 8.1 |
| 90-180 | 915.81 | 8.6 |
| 110-180 | 479.45 | 4.5 |
| 0-180 | 10684.35 | 100.0 |

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08

