


Project: _____
Location: _____
Cat. #: _____
Type: _____
Quantity: _____

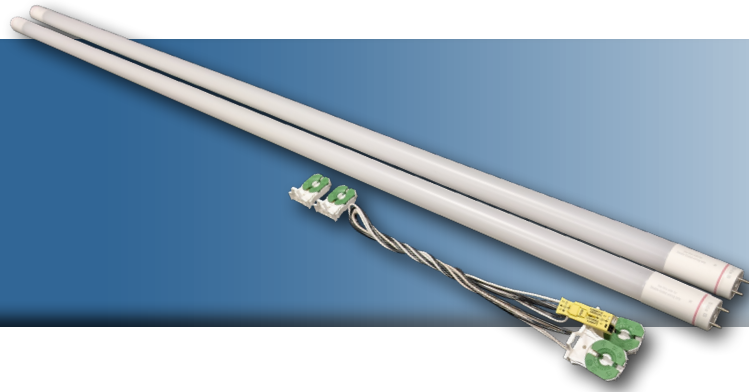

RLKB | Type B T-LED Relamp Kit

Features:

- Pre-wired sockets allow for quick and easy conversion of fluorescent luminaires to high performance, long life LED luminaires
- Type B-Line Voltage T8 LED tube ready
- Frosted glass tubes eliminate pixelation

Construction:

- Pre-wired sockets with Type B T8 LED tubes.



Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations



Applications:

Suitable for most existing fluorescent luminaires.

Ambient Operating Temp.:

- -20°C to 45°C per lamp specifications
- Consult manufacturer's spec sheet for specific lamp operating temperatures*

Warranty:

- Lamps: 5 year standard warranty. 10 year extended limited warranty based on depreciated value after 5 yrs, max 4,380 hrs/yr - see Keystone Tech's website for complete warranty terms and conditions.



Ordering Guide:

example: RLKB 4 T8LED SENS 10.5T84GSD 835

Series	# Lamps	Lamp Type	Wiring	Lamps	CRI/CCT ⁽¹⁾
RLKB		T8LED			
RLKB Type B T-LED Relamp Kit	1 1 Lamp	T8LED T8 LED Type B-Line Voltage Lamp	SENS Single End, Non-Shunted Sockets	<u>2' Lamp Options:</u> 7T82GCSD 2', 7W T8, Coated Glass, Single/Double End Wiring, 120-277V	827 80+ CRI / 2700K
	2 2 Lamps			830 80+ CRI / 3000K	
	3 3 Lamps			835 80+ CRI / 3500K	
	4 4 Lamps			840 80+ CRI / 4000K	
				850 80+ CRI / 5000K	
				865 80+ CRI / 6500K	
			DENS Double End, Non-Shunted Sockets	<u>3' Lamp Options:</u> 12T83GCSD 3', 12W T8, Coated Glass, Single/Double End Wiring, 120-277V	
				15T84GCSD 4', 15W T8, Coated Glass, Single/Double End Wiring, 120-277V	
				18.5T848GCSD 4', 18.5W T8, Cated Glass, Single/Double End Wiring, 120-277V	
				25T84GSD 4', 25W T8, Glass, Single/Double End Wiring, 120-277V	
				10.5T84GSD 4', 10.5W T8, Glass, Single/Double End Wiring, 120-277V	
				14.5T84GSD 4', 14.5W T8, Glass, Single/Double End Wiring, 120-277V	
	DES Double End, Shunted Sockets				

Notes

⁽¹⁾ Not all color temperatures are available for all lamp types. See lamp chart, below, for details.

Lamp Chart:

Lamp Code	Lamp Model	Nominal Length	Watts	Lumens 827	Lumens 830	Lumens 835	Lumens 840	Lumens 850	Lumens 865	Con-struction	Wiring	Rated Life	Warranty
7T82GCSD	KT-LED7T8-24GC-8xx-DX2 /G2	24"	7	N/A	N/A	950	1,000	1,000	N/A	Coated Glass	Single or Double End	50,000 hours	10 Years*
12T83GCSD	KT-LED12T8-36GC-8xx-DX2 /G2	36"	12	N/A	N/A	1,600	1,650	1,650	N/A	Coated Glass	Single or Double End	50,000 hours	10 Years*
10.5T84GSD	KT-LED10.5T8-48G-8xx-DX2 /G2	48"	10.5	1,650	1,650	1,650	1,700	1,720	N/A	Glass	Single or Double End	50,000 hours	10 Years*
14.5T84GSD	KT-LED14.5T8-48G-8xx-DX2 /G2	48"	14.5	N/A	1,900	1,900	2,000	2,000	2,000	Glass	Single or Double End	50,000 hours	10 Years*
15T84GCSD	KT-LED15T8-48GC-8xx-DX2 /G2	48"	15	N/A	1,900	1,900	2,000	2,000	2,000	Coated Glass	Single or Double End	50,000 hours	10 Years*
18.5T84GCSD	KT-LED18.5T8-48GC-8xx-DX2 /G2	48"	18.5	N/A	N/A	2,450	2,500	2,600	2,600	Coated Glass	Single or Double End	50,000 hours	10 Years*
25T84GSD	KT-LED25T8-48G-8xx-DX2	48"	25	N/A	3,000	3,000	2,900	3,000	N/A	Glass	Single or Double End	50,000 hours	10 Years*

* 5 yr standard warranty. 10 yr extended limited warranty up to 4,380 operating hours per year, based on depreciated value after 5 yrs. See Keystone Tech.'s website for complete warranty terms and conditions.

