



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

T-LED
 TYPE - C

NVC | Type C T-LED Vaportight

Features:

- Type C T8 LED tubes with external driver
- 0-10V dimming drivers standard, down to 10%
- Control options available
- Multiple hanging options, including surface, chain, and aircraft cable, for easy installation
- Durable materials and craftsmanship allows the NVC to withstand some of the harshest environments

Applications:

Most industrial, retail, and recreational low bay and high bay applications

- Warehouse/Manufacturing Facility
- Food Processing
- Gymnasium
- Car Wash
- Cold/Frozen Storage (*cold temperature rules apply. Refer to warranty document at www.lumenfocus.com/support for details*)

Construction:

- UL 5VA fiberglass housing (will not melt or burn)
- Impact resistant acrylic and UV stabilized polycarbonate lenses
- Pre-painted cold rolled steel gear trays
- Acetal copolymer secure locking plastic latches (stainless steel latches optional)
- Stainless steel mounting hardware

Certifications:

- UL 1598 listed for US and Canada, suitable for wet locations
- IP65
- IP66
- IP67
- NEMA 4X
- NSF
- PSI 1500
- RoHS



10 YEAR
 EXTENDED
 WARRANTY



Ambient Operating Temp.:

- -20°C to 45°C

Predicted Lifetime:

- Driver Rated Life: 70,000 hrs
- L70: ≥ 70,000 hrs

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions.
- Lamps: 7 year standard warranty, 10 year extended limited warranty based on depreciated value after 7 yrs, max 6,130 hrs/yr - see Keystone Tech's website for complete warranty terms and conditions.
- Drivers: 7 year standard warranty, 10 year extended limited warranty based on depreciated value after 7 yrs, max 4,380 hrs/yr - see Keystone Tech's website for complete warranty terms and conditions.



Ordering Guide:

example: NVC 4T 2 12T84LED UV 1ED CSA 850 QC Z311BL3 SSL

| Series | Length | # Lamps ⁽¹⁾ | Lamp Type | Voltage | Driver | Shielding | CRI/CCT | Hanging | Controls | Options |
|--------------------------------------|------------------------------|------------------------|---|---------------|---|---|--------------------------------------|---|--|--|
| NVC | | | | UV | | | | | | |
| NVC Type C T-LED Vaportight | 2 2' | 1 1 Lamp | 8T82LED 2; 8W T8 LED Type C Lamp ⁽²⁾ | UV 120-277 | 1ED 1 Electronic Driver ⁽³⁾ | CSP Clear Shallow Polycarbonate | 830 80+ CRI / 3000K | Blank Surface Mounting Bracket (Comes Standard) | Blank No Controls | Blank No Options |
| | 4 4' | 2 2 Lamps | 10T84LED 4; 10W T8 LED Type C Lamp | | 2ED 2 Electronic Drivers ⁽⁴⁾ | FSP Frosted Shallow Polycarbonate | 835 80+ CRI / 3500K | SMBB Mounting Bracket Bail (For Chain or Cable Mounting) | ZOS Occupancy Sensor (On/Off) ⁽⁵⁾ | C6 6' Single Circuit Cord |
| | 4T 4' Tandem, 8' Total | 3 3 Lamps | 12T84LED 4; 12W T8 LED Type C Lamp | | | CRA Clear Ribbed Acrylic | 840 80+ CRI / 4000K | QC Bracket Bail with 10' Quick Hang Cable Kit | ZOFD1 Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping (120-277V) ⁽⁵⁾ | C6(LVL) C6 With Integrated Dimming Leads |
| | | | 13.5T84LED 4; 13.5W T8 LED Type C Lamp ⁽²⁾ | | | FRA Frosted Ribbed Acrylic | 850 80+ CRI / 5000K | QC20 Bracket Bail with 20' Quick Hang Cable Kit | ZOFDU Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping, Scheduling (120-480V) ⁽⁵⁾ | C10 10' Single Circuit Cord |
| | | | | | CSA Clear Shallow Acrylic | | SM45 45° Surface Mount Bracket | | C10(LVL) C10 With Integrated Dimming Leads | |
| | | | | | FSA Frosted Shallow Acrylic | | | | D6 6' Dual Circuit Cord | |
| | | | | | CDA Clear Deep Acrylic | | | | D10 10' Dual Circuit Cord | |
| | | | | | FDA Frosted Deep Acrylic | | | | P(NEMA) Plug (Specify NEMA configuration) | |
| | | | | | | | | | EM6 6.5W Emergency Pack (0°C-55°C ambient) ⁽⁷⁾ | |
| | | | | | | | | | EM10 10W Emergency Pack (0°C-55°C ambient) ⁽⁷⁾ | |
| | | | | | | | | | EM14 14W Emergency Pack (0°C-55°C ambient) ⁽⁷⁾ | |
| | | | | | | | | | EM10C 10W Cold Temp. Emergency Pack (-20°C-55°C ambient) ⁽⁷⁾ | |
| | | | | | | | | | EM16C 16W Cold Temp. Emergency Pack (-20°C-55°C ambient) ⁽⁷⁾ | |
| | | | | | | | | | SSL Stainless Steel Latches | |
| | | | | | | | | | F Fuse | |
| | | | | | | | | | SDT(480V) 480V To 277V Step Down Transformer | |
| | | | | | | | | | LVL 0-10V Dimming Leads for Easy Field Access | |

Notes

- ⁽¹⁾ # of lamps is for the profile of the fixture.
(ex. NVC 4T 1 10T84LED has 1 lamp per 4' section, 2 lamps total)
- ⁽²⁾ Not available in 3000K.
- ⁽³⁾ Not available for NVC 4T 3 (6 lamps total) configurations.
- ⁽⁴⁾ Not available for single lamp configurations.
- ⁽⁵⁾ See page 4 for more details.
- ⁽⁶⁾ " _ " = lens type. See page 4 for more details.
- ⁽⁷⁾ 0°C-55°C ambient. EM wattage must not be greater than total luminaire lamp wattage. (ex. If luminaire contains a single 8W lamp, EM pack must be ≤ 8W. For two 8W lamps, EM pack must be ≤ 16W.)

Controls Accessories (order separately)

 For WattStopper Z221L_Sensor
FSIR-100 Wireless IR Programming Tool


Lamp Chart:

| Lamp Type | Nominal Length | System Watts (per lamp) | Lumens per Lamp (3000K) | Lumens per Lamp (3500K) | Lumens per Lamp (4000K) | Lumens per Lamp (5000K) | Rated Life (L70) | Warranty |
|------------|----------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------------------|-----------|
| 8T82LED | 24" | 9 | N/A | 1,125 | 1,150 | 1,200 | 70,000 hrs | 10 Years* |
| 12T83LED | 36" | 13 | 1,680 | 1,680 | 1,730 | 1,780 | 70,000 hrs | 10 Years* |
| 10T84LED | 48" | 11.5 | 1,600 | 1,625 | 1,650 | 1,700 | 70,000 hrs | 10 Years* |
| 12T84LED | 48" | 13 | 1,700 | 1,700 | 1,750 | 1,800 | 70,000 hrs | 10 Years* |
| 13.5T84LED | 48" | 15 | N/A | 2,100 | 2,200 | 2,200 | 70,000 hrs | 10 Years* |

* 7 yr standard warranty. 10 yr extended limited warranty up to 6,130 operating hours per year, prorated after 7 yrs. See Keystone Tech.'s website for complete warranty terms and conditions.




Schematic:

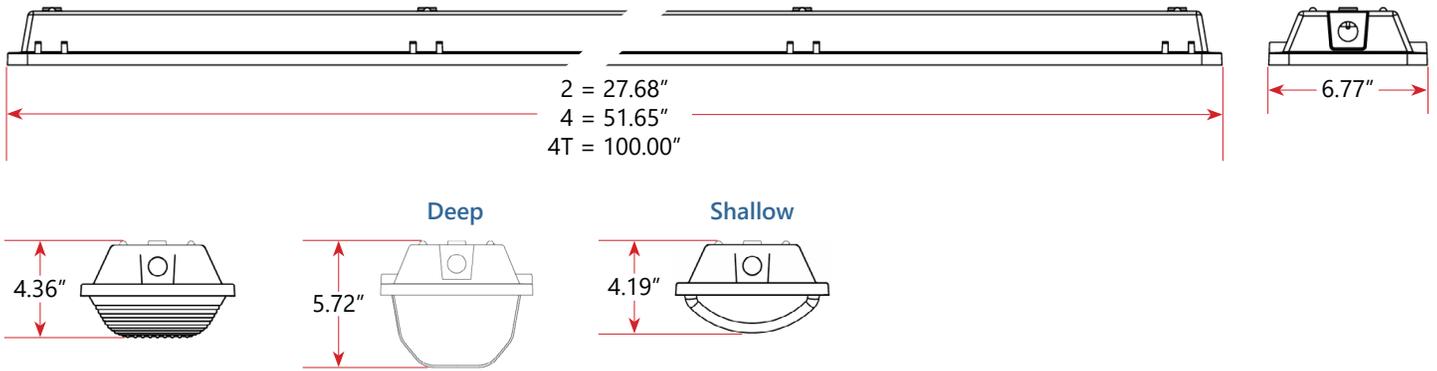


Mounting:



SM Surface Mount Bracket (comes standard)

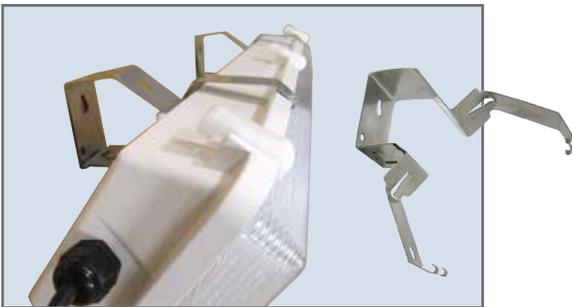

SM45 45° Surface Mount Bracket

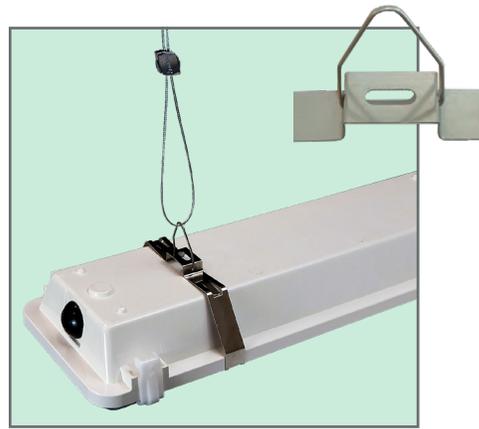

SMBB Surface Mount with Bracket Bail - for chain or cable mounting. (Shown with QC)



Controls Summary:

| Control Code | Type | Capabilities | Communication |
|--------------|-----------------------------------|---|--|
| ZOS | Motion (PIR) | On/Off | Wired |
| ZOFD1 | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping | Wired 0-10V, Programmable via Bluetooth App (iOS, Android) |
| ZOFDU | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling | Wired 0-10V, Programmable via Bluetooth App (iOS, Android) |
| Z211BLx | Motion (PIR), Photosensor | High/Low/Off, High-End Trim | Wired 0-10V, Programmable via IR remote (sold separately) |
| Z311BLx | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim | Wired 0-10V, Programmable via Bluetooth App (iOS, Android) |

On/Off Occupancy Sensor (ZOS)

The Leviton OSFHL-CTW (or equivalent) is an end mounted PIR On/Off motion sensor. It comes with two interchangeable lenses: Low Bay (8-25' heights), High Bay (20-40' heights), as well as an aisle mask.

- IP65 rated



Dimming Sensors (Z211B/Z311B)

- The Wattstopper FSP sensor provides multi-level control based on motion and/or daylight contribution
- Comes pre-installed on the fixture
- Rated for cold locations
- Parameters for Bluetooth-enabled Z311 adjustable via phone app - iOS or Android
- Parameters for Z211 adjustable via wireless configuration tool (FSIR-100 - sold separately)
- Available with black lens for black finishes (pictured right)
- Two lenses available, tailored for the ideal detection area and mounting height:
 - L2: 360° lens, maximum coverage 48', diameter from 8' height
 - L3: 360° lens, maximum coverage 40', diameter from 20' height
 - L7: 360° lens, maximum coverage 100', diameter from 40' height



Phone app interface for Z311B sensor

Smart Sensors (ZOFDx)

- Leviton Smart IP66 passive infrared (PIR) sensors
- Features mesh grouping (16 devices per group), occupancy sensing, daylight harvesting, scheduling (for ZOSFDU only), single-level switching
- Comes pre-installed on the end of the luminaire
- Rated for cold locations
- Configurable through the Leviton Smart Sensor App using a smartphone or other Bluetooth-enabled iOS or Android device

The ZOFD option includes four sensor lenses that can easily be installed or swapped out in the field. From left: the high bay lens (20'-40' mounting), the high bay lens with aisleway mask, the low bay lens (8'-20' mounting), and the low bay lens with aisleway mask.

