



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

DLR G 4 | LED 4" Select Retrofit Gimbal Down Light

Features:

- High performance LED technology
- Dimmable - see compatibility chart on page 2
- Works for retrofit and new construction applications
- Compatible with type IC and non-IC cans
- High quality 90 CRI
- Adjustable 0-25° tilt
- Field selectable color temperature: 2700K / 3000K / 3500K / 4000K / 5000K

Construction:

- Durable aluminum and polycarbonate construction
- E26 - medium base
- White finish



Certifications:

- UL Listed for wet locations
- IP43




Predicted L70 Lifetime:

- 50,000 hrs

Ambient Operating Temp:

- -20°C to 40°C



Applications:

Suitable for most commercial, industrial and institutional retrofit & new construction applications

- Retail
- Hospitals
- Offices
- Hospitality

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:

example: DLR G 4 MD 12 SW 9SEL

Series	Size	Output	Voltage	Reflector Trim	CRI/CCT
DLR G	4	MD	12	SW	9SEL
DLR G Retrofit Gimbal Down Light	4 4"	MD Medium	12 120V	SW Smooth White	9SEL 90 CRI / Field Selectable CCT: 2700K 3000K 3500K 4000K 5000K


Performance Chart:

Lumens	Watts	CRI
709 - 824	10	90

Accessories:

DLRGU24 Connector for GU24 base


Schematic:

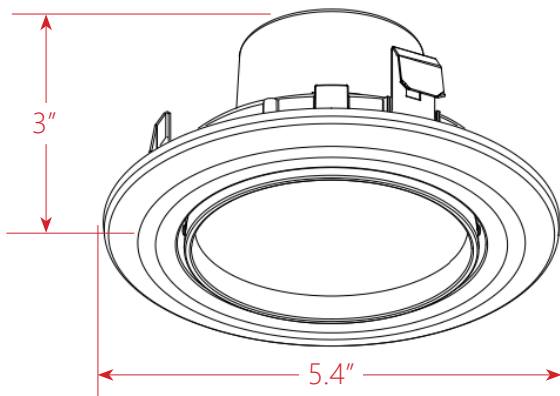

Photometric Data:

DLR G 4 MD 12 SW 9SEL

Test No.: 20211223
 Luminaire Lumens: 754.9 lm
 Luminaire Watts: 9.62 W
 Efficacy: 78.5 LPW
 Beam Angle: 108°

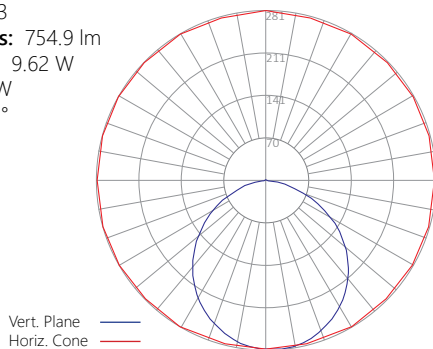

Dimming Compatibility:

Brand	Model	Compatibility	Range
Lutron	CT-603PGH-WH	✓	10-100%
Lutron	CTCL-153PDH-WH	✓	10-100%
Lutron	DV-600P	✓	10-100%
Lutron	DVLV-603P-IV	✓	10-100%
Lutron	MACL-153M-WH	✓	10-100%
Lutron	MALV-600	✓	10-100%
Lutron	MALV-600-IV	✗	-
Lutron	MIR-600THW-WH	✓	10-100%
Lutron	NT-1000	✓	10-100%
Lutron	S-600P	✓	0-100%
Lutron	S-600PR-WH	✓	10-100%
Lutron	S-603P	✓	0-100%
Lutron	SLV-600P-WH	✓	10-100%
Lutron	SPSLV-600-WH	✓	10-100%
Leviton	6631	✓	0-100%
Leviton	6672	✓	0-100%
Leviton	6674	✓	10-100%
Leviton	6683	✓	0-100%
Leviton	6633-P	✓	0-100%
Leviton	IPL06	✓	10-100%
Leviton	VP106	✓	10-100%

✓ Compatible
 ✗ Not Recommended

