



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL15 UV FR 935 @200MA.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-013(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 2 SEL15 UV FR 935

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] One LS3872A 28 LED board, 3500K

[BALLAST] One KTLD-15-UV-PS300-54-VDIM-LP1 LED driver set to 200mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1315
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	143
Total Luminaire Watts	9.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	1.99 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.06 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5457	5316	5366
55	4683	4796	4929
65	3694	4163	4360
75	2623	3520	3709
85	1377	3205	3282

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : ECL G2 2 SEL15 UV FR 935 @200MA.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	163.97	N.A.	12.50
0-30	348.60	N.A.	26.50
0-40	570.51	N.A.	43.40
0-60	998.63	N.A.	75.90
0-80	1243.64	N.A.	94.50
0-90	1291.31	N.A.	98.20
10-90	1248.95	N.A.	94.90
20-40	406.54	N.A.	30.90
20-50	633.92	N.A.	48.20
40-70	578.89	N.A.	44.00
60-80	245.01	N.A.	18.60
70-80	94.24	N.A.	7.20
80-90	47.67	N.A.	3.60
90-110	24.07	N.A.	1.80
90-120	24.14	N.A.	1.80
90-130	24.14	N.A.	1.80
90-150	24.14	N.A.	1.80
90-180	24.14	N.A.	1.80
110-180	0.07	N.A.	0.00
0-180	1315.45	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	42.36
10-20	121.61
20-30	184.62
30-40	221.92
40-50	227.38
50-60	200.73
60-70	150.78
70-80	94.24
80-90	47.67
90-100	19.41
100-110	4.66
110-120	0.07
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL15 UV FR 935 @200MA.IES

## COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	81
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	76	73	69	67
3	89	78	70	63	86	77	69	63	73	67	61	70	65	60	67	63	59	56
4	82	69	60	54	79	68	60	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	40	51	44	39	49	43	39	36
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34	32
8	60	46	38	32	58	45	37	32	44	37	31	43	36	31	41	35	31	29
9	56	42	34	29	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	39	31	26	37	30	26	36	30	25	35	29	25	23

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL15 UV FR 935 @200MA.IES

## UGR TABLE - CORRECTED


### Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	16.3	18.0	16.7	18.3	18.7	18.0	19.6	18.4	20.0	20.4
	3H	17.6	19.1	18.0	19.4	19.8	20.0	21.5	20.4	21.8	22.2
	4H	18.0	19.4	18.4	19.8	20.2	20.8	22.2	21.3	22.6	23.0
	6H	18.2	19.5	18.7	19.9	20.3	21.6	22.9	22.1	23.3	23.7
	8H	18.3	19.5	18.7	19.9	20.4	22.0	23.2	22.4	23.6	24.1
	12H	18.3	19.5	18.8	19.9	20.4	22.3	23.5	22.8	23.9	24.4
4H	2H	17.2	18.6	17.6	18.9	19.4	18.5	19.9	18.9	20.3	20.7
	3H	18.7	19.9	19.1	20.3	20.7	20.7	21.9	21.1	22.3	22.8
	4H	19.2	20.3	19.7	20.7	21.2	21.7	22.8	22.2	23.2	23.7
	6H	19.5	20.5	20.0	21.0	21.5	22.6	23.6	23.1	24.1	24.6
	8H	19.6	20.5	20.1	21.0	21.5	23.1	24.0	23.6	24.4	25.0
	12H	19.7	20.5	20.2	21.0	21.5	23.5	24.3	24.1	24.9	25.4
8H	4H	19.8	20.6	20.2	21.1	21.6	21.9	22.8	22.4	23.3	23.8
	6H	20.3	21.0	20.8	21.5	22.0	23.0	23.8	23.6	24.3	24.8
	8H	20.4	21.1	21.0	21.6	22.2	23.6	24.3	24.2	24.8	25.3
	12H	20.5	21.1	21.1	21.7	22.3	24.2	24.8	24.8	25.3	25.9
12H	4H	19.9	20.7	20.4	21.2	21.7	21.9	22.7	22.4	23.2	23.8
	6H	20.5	21.2	21.0	21.6	22.2	23.1	23.8	23.7	24.3	24.8
	8H	20.7	21.3	21.3	21.8	22.4	23.7	24.3	24.3	24.8	25.4

Maximum UGR = 25.9

POLAR GRAPH

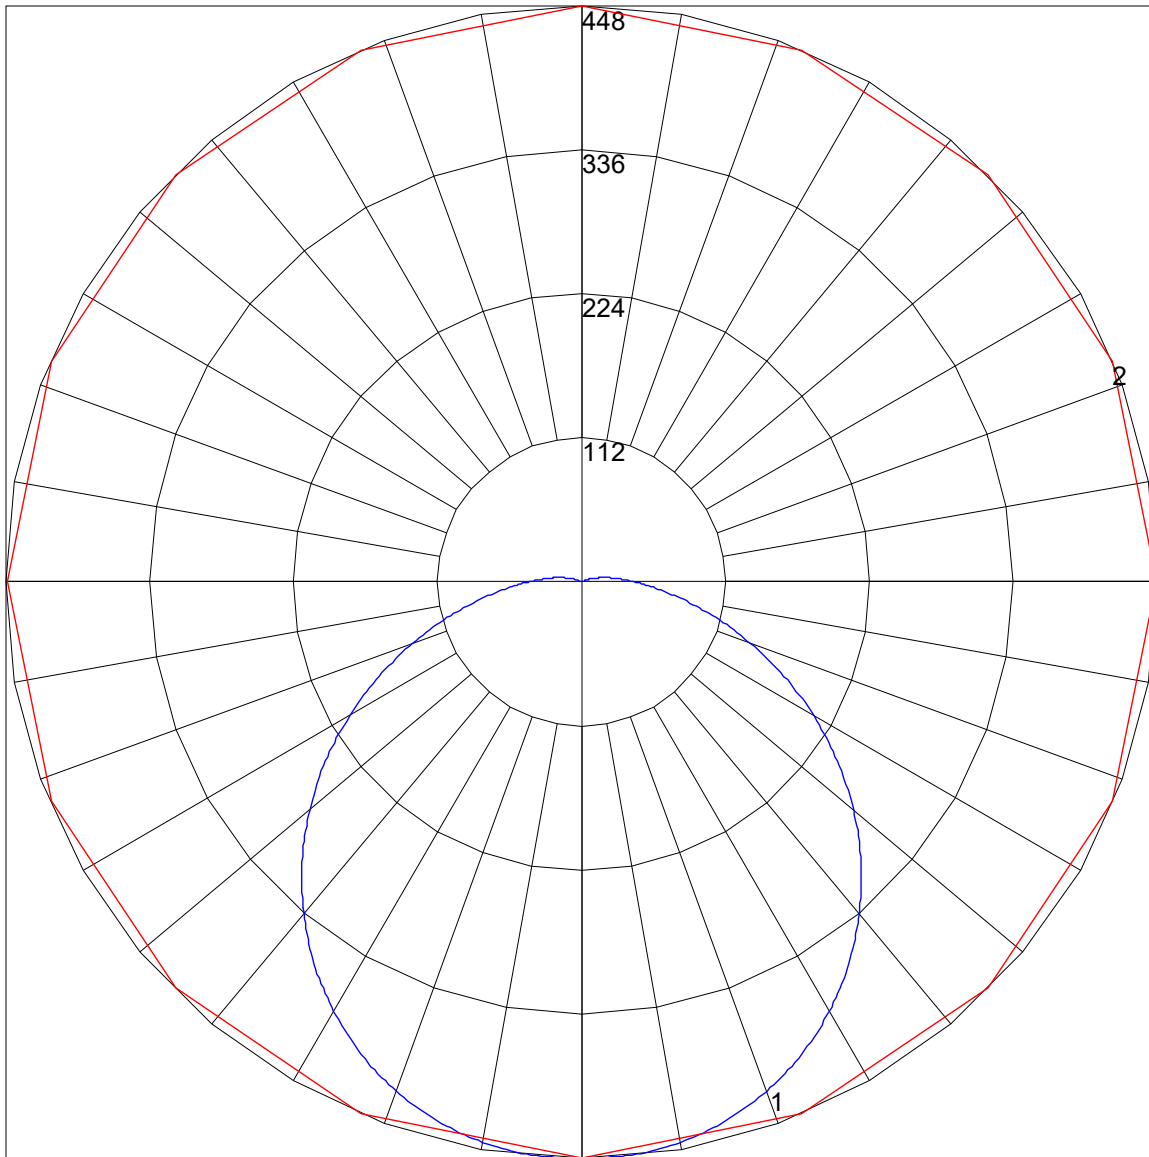

Maximum Candela = 447.907 Located At Horizontal Angle = 90, Vertical Angle = 1.5  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (1.5) (Through Max. Cd.)