



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL35 UV FR 930 @650MA.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-013(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 2 SEL35 UV FR 930

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] One LS3872A 64 LED board, 3000K

[BALLAST] One KTLD-35-UV-PS650-54-VDIM-LM1 LED driver set to 650mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4711
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	144
Total Luminaire Watts	32.8
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	1.99 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.06 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	19545	19039	19216
55	16773	17176	17651
65	13230	14909	15614
75	9395	12608	13284
85	4932	11478	11756

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : ECL G2 2 SEL35 UV FR 930 @650MA.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	587.25	N.A.	12.50
0-30	1248.47	N.A.	26.50
0-40	2043.25	N.A.	43.40
0-60	3576.5	N.A.	75.90
0-80	4454.00	N.A.	94.50
0-90	4624.73	N.A.	98.20
10-90	4473.02	N.A.	94.90
20-40	1456.00	N.A.	30.90
20-50	2270.34	N.A.	48.20
40-70	2073.26	N.A.	44.00
60-80	877.50	N.A.	18.60
70-80	337.50	N.A.	7.20
80-90	170.73	N.A.	3.60
90-110	86.21	N.A.	1.80
90-120	86.47	N.A.	1.80
90-130	86.47	N.A.	1.80
90-150	86.47	N.A.	1.80
90-180	86.47	N.A.	1.80
110-180	0.25	N.A.	0.00
0-180	4711.2	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	151.71
10-20	435.54
20-30	661.22
30-40	794.78
40-50	814.34
50-60	718.91
60-70	540.00
70-80	337.50
80-90	170.73
90-100	69.53
100-110	16.68
110-120	0.25
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL35 UV FR 930 @650MA.IES

## COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	81
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	76	73	69	67
3	89	78	70	63	86	77	69	63	73	67	61	70	65	60	67	63	59	56
4	82	69	60	54	79	68	60	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	40	51	44	39	49	43	39	36
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34	32
8	60	46	38	32	58	45	37	32	44	37	31	43	36	31	41	35	31	29
9	56	42	34	29	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	26	36	30	25	35	29	25	23

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL35 UV FR 930 @650MA.IES

## UGR TABLE - CORRECTED

### Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

### Room Size UGR Viewed Crosswise


X=2H	Y=2H	20.7	22.3	21.1	22.7	23.1	22.4	24.0	22.8	24.4	24.8
	3H	22.0	23.5	22.4	23.8	24.2	24.4	25.9	24.8	26.2	26.6
	4H	22.4	23.8	22.8	24.2	24.6	25.2	26.6	25.7	27.0	27.4
	6H	22.6	23.9	23.1	24.3	24.7	26.0	27.3	26.5	27.7	28.1
	8H	22.7	23.9	23.1	24.3	24.8	26.4	27.6	26.8	28.0	28.5
	12H	22.7	23.9	23.2	24.3	24.8	26.7	27.9	27.2	28.3	28.8

### UGR Viewed Endwise

4H	2H	21.6	22.9	22.0	23.3	23.8	22.9	24.3	23.3	24.7	25.1
	3H	23.1	24.3	23.5	24.7	25.1	25.1	26.3	25.5	26.7	27.2
	4H	23.6	24.7	24.1	25.1	25.6	26.1	27.2	26.6	27.6	28.1
	6H	23.9	24.9	24.4	25.4	25.9	27.0	28.0	27.5	28.5	29.0
	8H	24.0	24.9	24.5	25.4	25.9	27.5	28.4	28.0	28.8	29.3
	12H	24.1	24.9	24.6	25.4	25.9	27.9	28.7	28.5	29.3	29.8
8H	4H	24.2	25.0	24.6	25.5	26.0	26.3	27.2	26.8	27.7	28.2
	6H	24.7	25.4	25.2	25.9	26.4	27.4	28.2	28.0	28.7	29.2
	8H	24.8	25.5	25.4	26.0	26.6	28.0	28.7	28.6	29.2	29.7
	12H	24.9	25.5	25.5	26.1	26.7	28.6	29.2	29.2	29.7	30.3
12H	4H	24.3	25.1	24.8	25.6	26.1	26.3	27.1	26.8	27.6	28.1
	6H	24.9	25.6	25.4	26.0	26.6	27.5	28.2	28.1	28.7	29.2
	8H	25.1	25.7	25.7	26.2	26.8	28.1	28.7	28.7	29.2	29.8

Maximum UGR = 30.3

POLAR GRAPH

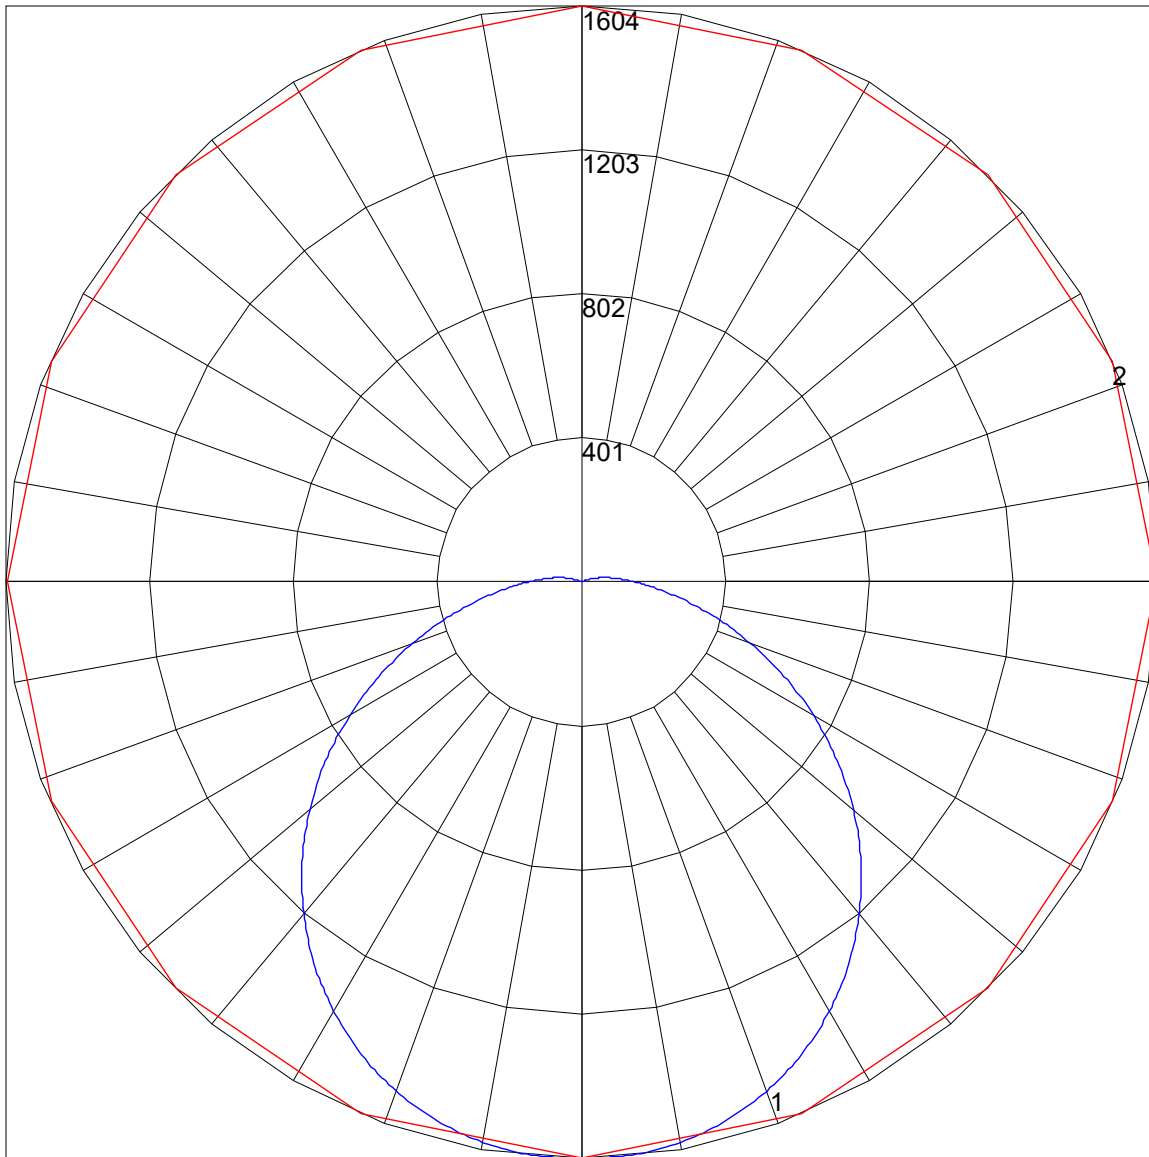

Maximum Candela = 1604.144 Located At Horizontal Angle = 90, Vertical Angle = 1.5  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (1.5) (Through Max. Cd.)