



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 2 SEL45 UV 930 @800MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-011A(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 2 SEL45 UV 930

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] no enclosure.

[LAMPCAT] One LS3872A 84 LED board, 3000K

[BALLAST] One KTLD-45-UV-PS850-54-VDIM-LM1 LED driver set to 800mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5469
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	155
Total Luminaire Watts	35.2
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.32
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	1.99 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.02 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	25975	25147	25068
55	25450	24323	23828
65	23904	22081	21492
75	20184	17281	16896
85	11119	7675	7197

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 2 SEL45 UV 930 @800MA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	669.19	N.A.	12.20
0-30	1432.8	N.A.	26.20
0-40	2371.59	N.A.	43.40
0-60	4288.24	N.A.	78.40
0-80	5379.63	N.A.	98.40
0-90	5468.87	N.A.	100.00
10-90	5296.59	N.A.	96.80
20-40	1702.39	N.A.	31.10
20-50	2699.52	N.A.	49.40
40-70	2620.21	N.A.	47.90
60-80	1091.39	N.A.	20.00
70-80	387.83	N.A.	7.10
80-90	89.24	N.A.	1.60
90-110	0.51	N.A.	0.00
90-120	0.51	N.A.	0.00
90-130	0.51	N.A.	0.00
90-150	0.51	N.A.	0.00
90-180	0.51	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	5469.38	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	172.28
10-20	496.91
20-30	763.61
30-40	938.79
40-50	997.12
50-60	919.53
60-70	703.56
70-80	387.83
80-90	89.24
90-100	0.51
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 2 SEL45 UV 930 @800MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	90	83	78	96	88	82	77	85	79	75	81	77	73	78	75	71	69
3	90	79	71	64	87	77	70	64	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	68	60	54	66	59	53	64	57	52	61	56	51	49
5	75	62	53	46	73	61	53	46	59	51	46	57	50	45	55	49	45	42
6	69	56	47	40	68	55	46	40	53	45	40	51	45	39	50	44	39	37
7	64	51	42	35	63	50	41	35	48	41	35	47	40	35	45	39	35	33
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23


IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 2 SEL45 UV 930 @800MA.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	23.3	25.0	23.7	25.3	25.6	23.4	25.1	23.8	25.4	25.7
	3H	25.1	26.6	25.5	26.9	27.3	25.2	26.7	25.6	27.0	27.4
	4H	25.7	27.1	26.1	27.5	27.8	25.8	27.2	26.2	27.6	28.0
	6H	26.1	27.4	26.5	27.8	28.2	26.2	27.5	26.6	27.9	28.3
	8H	26.2	27.4	26.6	27.8	28.2	26.3	27.6	26.8	28.0	28.4
	12H	26.2	27.4	26.6	27.8	28.2	26.4	27.6	26.8	28.0	28.4
4H	2H	24.0	25.4	24.4	25.7	26.1	24.1	25.5	24.4	25.8	26.2
	3H	25.9	27.1	26.3	27.5	27.9	26.0	27.2	26.4	27.6	28.0
	4H	26.7	27.7	27.1	28.1	28.6	26.7	27.8	27.2	28.2	28.7
	6H	27.1	28.1	27.6	28.5	29.0	27.2	28.2	27.7	28.6	29.1
	8H	27.3	28.1	27.7	28.6	29.0	27.4	28.3	27.8	28.7	29.2
	12H	27.3	28.1	27.8	28.6	29.1	27.5	28.2	27.9	28.7	29.2
8H	4H	26.9	27.8	27.4	28.2	28.7	27.0	27.9	27.5	28.3	28.8
	6H	27.5	28.2	28.0	28.7	29.2	27.6	28.3	28.1	28.8	29.3
	8H	27.6	28.3	28.2	28.8	29.3	27.8	28.4	28.3	28.9	29.4
	12H	27.7	28.3	28.3	28.8	29.4	27.9	28.5	28.4	29.0	29.5
12H	4H	26.9	27.7	27.4	28.2	28.7	27.0	27.8	27.5	28.3	28.7
	6H	27.5	28.2	28.0	28.6	29.2	27.6	28.3	28.1	28.7	29.3
	8H	27.7	28.3	28.2	28.8	29.3	27.8	28.4	28.3	28.9	29.5

Maximum UGR = 29.5

POLAR GRAPH

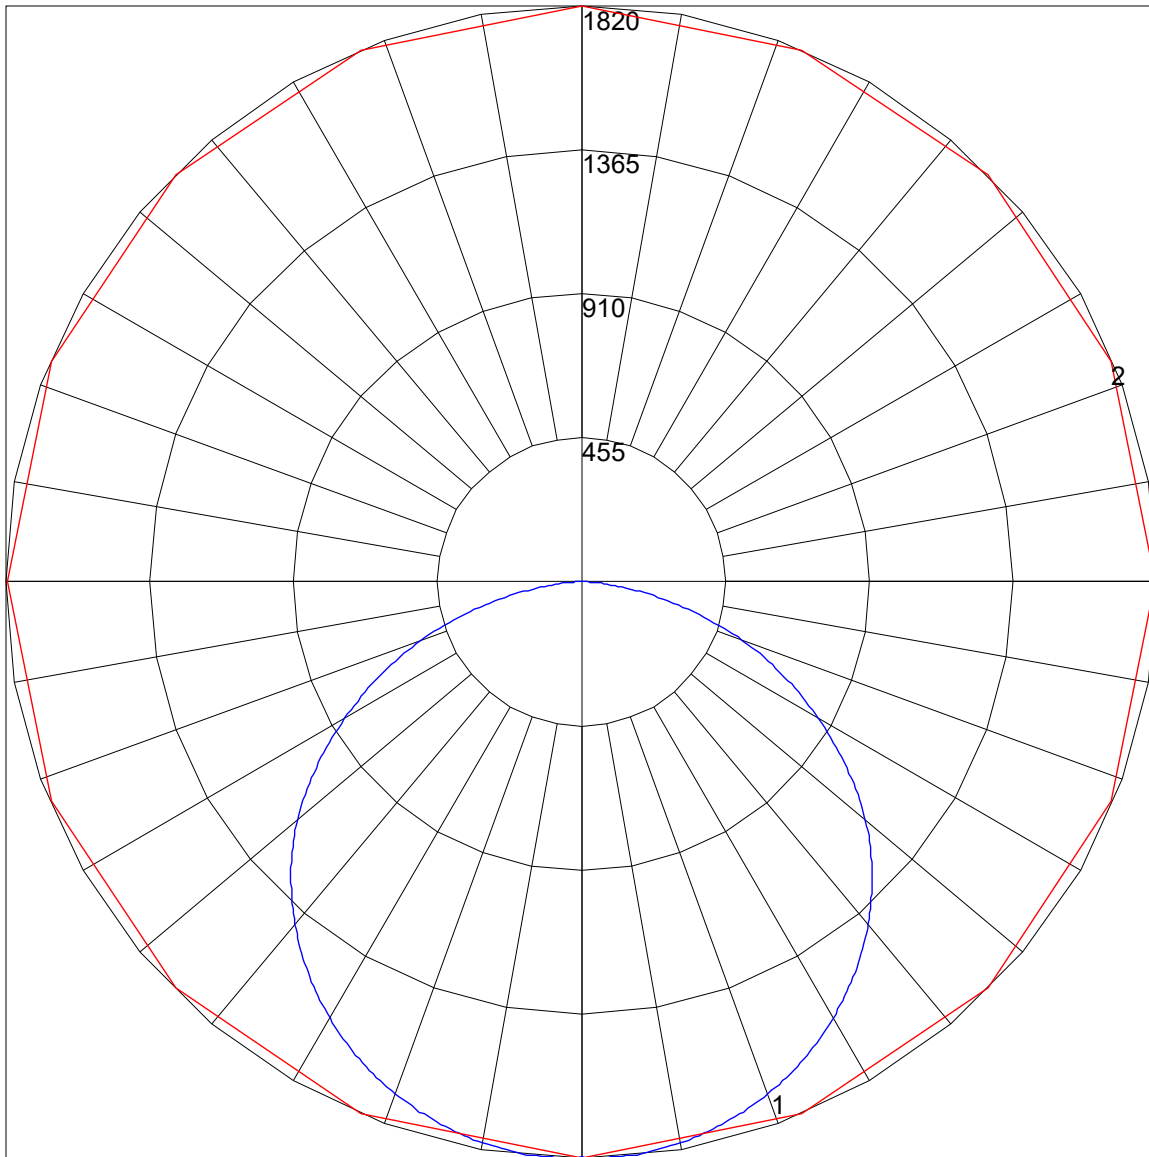

Maximum Candela = 1820.473 Located At Horizontal Angle = 90, Vertical Angle = 2
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2) (Through Max. Cd.)