



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 6 SEL100 UV 940 @1500MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-016(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 6 SEL100 UV 940

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] no enclosure.

[LAMPCAT] Three LS3872A 64 LED boards, 4000K

[BALLAST] One KTLD-100-UV-PS1800-54-VDIM-LM2 LED driver set to 1500mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

| | |
|---------------------------------|---------------------|
| Lumens Per Lamp | N.A. (absolute) |
| Total Lamp Lumens | N.A. (absolute) |
| Luminaire Lumens | 12165 |
| Total Luminaire Efficiency | N.A. |
| Luminaire Efficacy Rating (LER) | 164 |
| Total Luminaire Watts | 74.3 |
| Ballast Factor | 1.00 |
| CIE Type | Direct |
| Spacing Criterion (0-180) | 1.30 |
| Spacing Criterion (90-270) | 1.32 |
| Spacing Criterion (Diagonal) | 1.42 |
| Basic Luminous Shape | Rectangular w/Sides |
| Luminous Length (0-180) | 6.00 ft |
| Luminous Width (90-270) | 0.38 ft |
| Luminous Height | 0.02 ft |

LUMINANCE DATA (cd/sq.m)

| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
|---------------------|------------------|-------------------|-------------------|
| 45 | 19311 | 18653 | 18512 |
| 55 | 18997 | 18104 | 17576 |
| 65 | 17974 | 16485 | 15846 |
| 75 | 15354 | 12954 | 12078 |
| 85 | 8732 | 5848 | 5207 |

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL100 UV 940 @1500MA.IES

ZONAL LUMEN SUMMARY

| Zone | Lumens | %Lamp | %Fixt |
|---------|----------|-------|--------|
| 0-20 | 1487.79 | N.A. | 12.20 |
| 0-30 | 3186.12 | N.A. | 26.20 |
| 0-40 | 5274.97 | N.A. | 43.40 |
| 0-60 | 9543.88 | N.A. | 78.50 |
| 0-80 | 11968.48 | N.A. | 98.40 |
| 0-90 | 12163.93 | N.A. | 100.00 |
| 10-90 | 11780.91 | N.A. | 96.80 |
| 20-40 | 3787.18 | N.A. | 31.10 |
| 20-50 | 6007.36 | N.A. | 49.40 |
| 40-70 | 5836.48 | N.A. | 48.00 |
| 60-80 | 2424.6 | N.A. | 19.90 |
| 70-80 | 857.02 | N.A. | 7.00 |
| 80-90 | 195.45 | N.A. | 1.60 |
| 90-110 | 1.06 | N.A. | 0.00 |
| 90-120 | 1.06 | N.A. | 0.00 |
| 90-130 | 1.06 | N.A. | 0.00 |
| 90-150 | 1.06 | N.A. | 0.00 |
| 90-180 | 1.06 | N.A. | 0.00 |
| 110-180 | 0.00 | N.A. | 0.00 |
| 0-180 | 12164.99 | N.A. | 100.00 |

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

| Zone | Lumens |
|---------|---------|
| 0-10 | 383.02 |
| 10-20 | 1104.78 |
| 20-30 | 1698.32 |
| 30-40 | 2088.85 |
| 40-50 | 2220.18 |
| 50-60 | 2048.73 |
| 60-70 | 1567.57 |
| 70-80 | 857.02 |
| 80-90 | 195.45 |
| 90-100 | 1.06 |
| 100-110 | 0.00 |
| 110-120 | 0.00 |
| 120-130 | 0.00 |
| 130-140 | 0.00 |
| 140-150 | 0.00 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL100 UV 940 @1500MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

| RC | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 109 | 104 | 100 | 96 | 106 | 102 | 98 | 94 | 97 | 94 | 91 | 93 | 91 | 88 | 90 | 88 | 86 | 84 |
| 2 | 99 | 90 | 83 | 78 | 96 | 88 | 82 | 77 | 85 | 79 | 75 | 82 | 77 | 73 | 78 | 75 | 71 | 69 |
| 3 | 90 | 79 | 71 | 64 | 87 | 77 | 70 | 64 | 74 | 68 | 62 | 72 | 66 | 61 | 69 | 64 | 60 | 58 |
| 4 | 82 | 70 | 61 | 54 | 80 | 68 | 60 | 54 | 66 | 59 | 53 | 64 | 57 | 52 | 61 | 56 | 52 | 49 |
| 5 | 75 | 62 | 53 | 46 | 73 | 61 | 53 | 46 | 59 | 51 | 46 | 57 | 50 | 45 | 55 | 49 | 45 | 42 |
| 6 | 69 | 56 | 47 | 40 | 68 | 55 | 46 | 40 | 53 | 45 | 40 | 51 | 45 | 39 | 50 | 44 | 39 | 37 |
| 7 | 64 | 51 | 42 | 36 | 63 | 50 | 41 | 35 | 48 | 41 | 35 | 47 | 40 | 35 | 45 | 39 | 35 | 33 |
| 8 | 60 | 46 | 37 | 32 | 58 | 45 | 37 | 31 | 44 | 37 | 31 | 43 | 36 | 31 | 42 | 35 | 31 | 29 |
| 9 | 56 | 42 | 34 | 28 | 54 | 42 | 34 | 28 | 40 | 33 | 28 | 39 | 33 | 28 | 38 | 32 | 28 | 26 |
| 10 | 52 | 39 | 31 | 26 | 51 | 38 | 31 | 26 | 37 | 30 | 25 | 36 | 30 | 25 | 36 | 30 | 25 | 23 |


IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL100 UV 940 @1500MA.IES

UGR TABLE - CORRECTED

| | | | | | | | | | | | |
|----------------|------|----------------------|------|------|------|------|--------------------|------|------|------|------|
| Reflectances | | | | | | | | | | | |
| Ceiling Cavity | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| Floor Cavity | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size | | UGR Viewed Crosswise | | | | | UGR Viewed Endwise | | | | |
| X=2H | Y=2H | 22.3 | 24.0 | 22.7 | 24.3 | 24.6 | 22.4 | 24.1 | 22.8 | 24.4 | 24.7 |
| | 3H | 24.1 | 25.6 | 24.5 | 25.9 | 26.3 | 24.2 | 25.7 | 24.6 | 26.1 | 26.4 |
| | 4H | 24.7 | 26.1 | 25.1 | 26.5 | 26.8 | 24.8 | 26.2 | 25.2 | 26.6 | 27.0 |
| | 6H | 25.1 | 26.4 | 25.5 | 26.8 | 27.2 | 25.2 | 26.5 | 25.6 | 26.9 | 27.3 |
| | 8H | 25.2 | 26.4 | 25.6 | 26.8 | 27.2 | 25.3 | 26.6 | 25.7 | 27.0 | 27.4 |
| | 12H | 25.2 | 26.4 | 25.6 | 26.8 | 27.2 | 25.4 | 26.6 | 25.8 | 26.9 | 27.4 |
| 4H | 2H | 23.0 | 24.4 | 23.4 | 24.7 | 25.1 | 23.1 | 24.5 | 23.5 | 24.8 | 25.2 |
| | 3H | 24.9 | 26.1 | 25.3 | 26.5 | 26.9 | 25.0 | 26.2 | 25.4 | 26.6 | 27.0 |
| | 4H | 25.7 | 26.7 | 26.1 | 27.1 | 27.6 | 25.7 | 26.8 | 26.1 | 27.2 | 27.6 |
| | 6H | 26.2 | 27.1 | 26.6 | 27.5 | 28.0 | 26.2 | 27.2 | 26.7 | 27.6 | 28.0 |
| | 8H | 26.3 | 27.1 | 26.7 | 27.6 | 28.1 | 26.3 | 27.2 | 26.8 | 27.7 | 28.1 |
| | 12H | 26.3 | 27.1 | 26.8 | 27.6 | 28.1 | 26.4 | 27.2 | 26.9 | 27.7 | 28.2 |
| 8H | 4H | 25.9 | 26.8 | 26.4 | 27.2 | 27.7 | 26.0 | 26.9 | 26.4 | 27.3 | 27.8 |
| | 6H | 26.5 | 27.2 | 27.0 | 27.7 | 28.2 | 26.6 | 27.3 | 27.0 | 27.8 | 28.2 |
| | 8H | 26.6 | 27.3 | 27.2 | 27.8 | 28.3 | 26.7 | 27.4 | 27.2 | 27.9 | 28.4 |
| | 12H | 26.7 | 27.3 | 27.3 | 27.8 | 28.4 | 26.8 | 27.4 | 27.4 | 27.9 | 28.5 |
| 12H | 4H | 25.9 | 26.7 | 26.4 | 27.2 | 27.7 | 26.0 | 26.8 | 26.5 | 27.3 | 27.7 |
| | 6H | 26.5 | 27.2 | 27.0 | 27.6 | 28.2 | 26.6 | 27.2 | 27.1 | 27.7 | 28.2 |
| | 8H | 26.7 | 27.3 | 27.2 | 27.8 | 28.3 | 26.8 | 27.4 | 27.3 | 27.9 | 28.4 |

Maximum UGR = 28.5

POLAR GRAPH

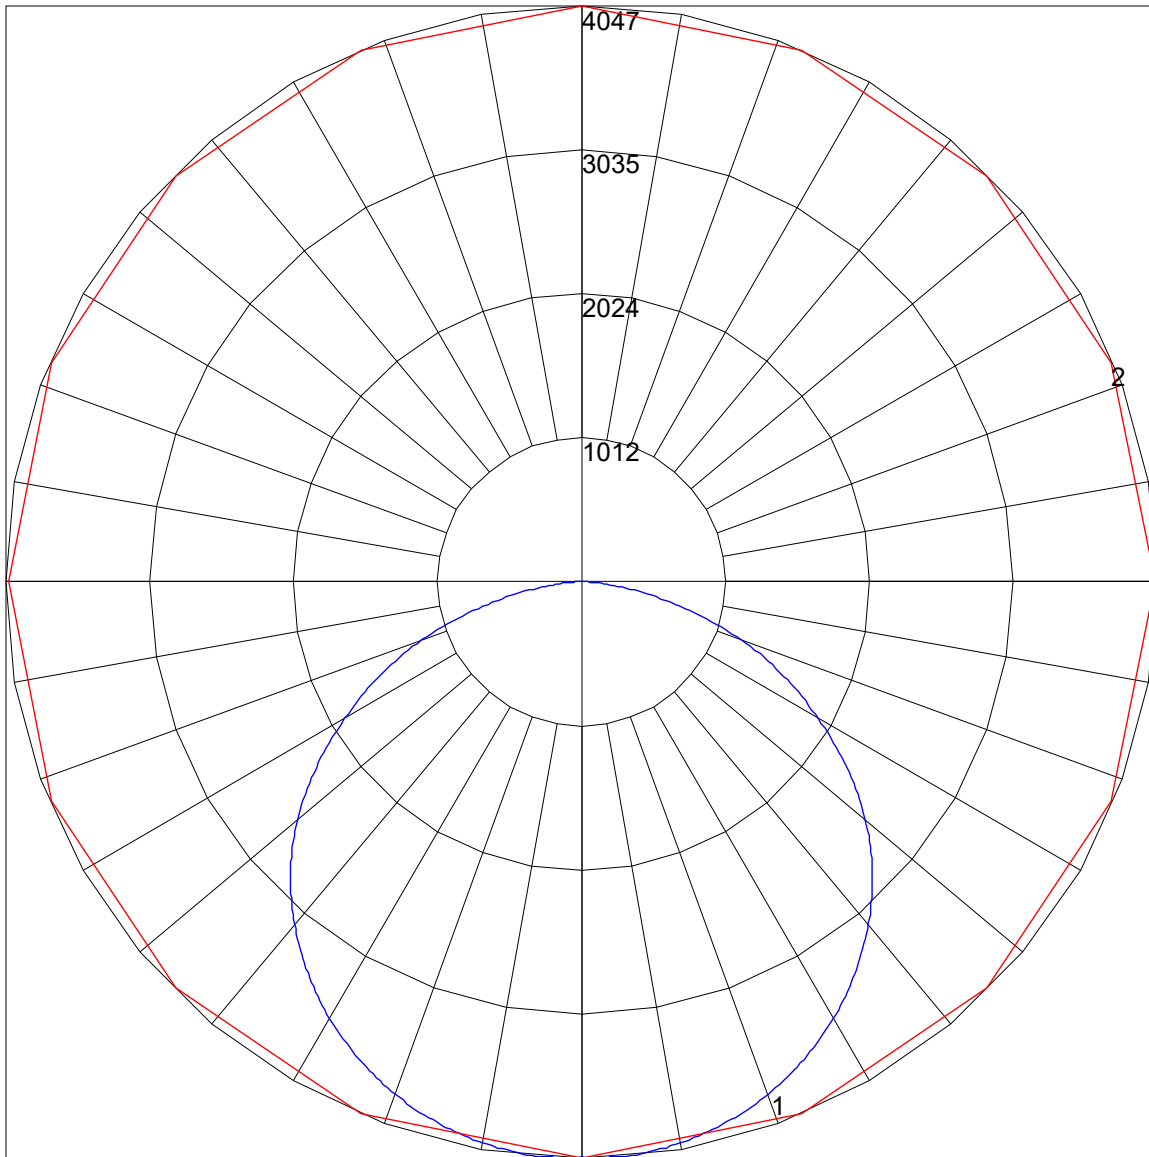

Maximum Candela = 4047.056 Located At Horizontal Angle = 90, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)