



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV 935 @1100MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-016(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 6 SEL75 UV 935

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] no enclosure.

[LAMPCAT] Three LS3872A 48 LED boards, 3500K

[BALLAST] One KTLD-75-UV-PS1400-54-VDIM-LM2 LED driver set to 1100mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	8724
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	161
Total Luminaire Watts	54.3
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.32
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	6.00 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.02 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	13849	13377	13276
55	13623	12983	12605
65	12890	11822	11364
75	11011	9290	8662
85	6263	4194	3734

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV 935 @1100MA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	1066.97	N.A.	12.20
0-30	2284.91	N.A.	26.20
0-40	3782.93	N.A.	43.40
0-60	6844.36	N.A.	78.50
0-80	8583.15	N.A.	98.40
0-90	8723.32	N.A.	100.00
10-90	8448.64	N.A.	96.80
20-40	2715.96	N.A.	31.10
20-50	4308.16	N.A.	49.40
40-70	4185.61	N.A.	48.00
60-80	1738.79	N.A.	19.90
70-80	614.61	N.A.	7.00
80-90	140.17	N.A.	1.60
90-110	0.76	N.A.	0.00
90-120	0.76	N.A.	0.00
90-130	0.76	N.A.	0.00
90-150	0.76	N.A.	0.00
90-180	0.76	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	8724.08	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	274.68
10-20	792.29
20-30	1217.95
30-40	1498.01
40-50	1592.19
50-60	1469.24
60-70	1124.18
70-80	614.61
80-90	140.17
90-100	0.76
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV 935 @1100MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	90	83	78	96	88	82	77	85	79	75	82	77	73	78	75	71	69
3	90	79	71	64	87	77	70	64	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	68	60	54	66	59	53	64	57	52	61	56	52	49
5	75	62	53	46	73	61	53	46	59	51	46	57	50	45	55	49	45	42
6	69	56	47	40	68	55	46	40	53	45	40	51	45	39	50	44	39	37
7	64	51	42	36	63	50	41	35	48	41	35	47	40	35	45	39	35	33
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23


IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV 935 @1100MA.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size											
		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	21.1	22.8	21.5	23.1	23.4	21.2	22.9	21.6	23.2	23.5
	3H	22.9	24.4	23.3	24.7	25.1	23.0	24.5	23.4	24.9	25.2
	4H	23.5	24.9	23.9	25.3	25.6	23.6	25.0	24.0	25.4	25.8
	6H	23.9	25.2	24.3	25.6	26.0	24.0	25.3	24.4	25.7	26.1
	8H	24.0	25.2	24.4	25.6	26.0	24.1	25.4	24.5	25.8	26.2
	12H	24.0	25.2	24.4	25.6	26.0	24.2	25.4	24.6	25.7	26.2
4H	2H	21.8	23.2	22.2	23.5	23.9	21.9	23.3	22.3	23.6	24.0
	3H	23.7	24.9	24.1	25.3	25.7	23.8	25.0	24.2	25.4	25.8
	4H	24.5	25.5	24.9	25.9	26.4	24.5	25.6	24.9	26.0	26.4
	6H	25.0	25.9	25.4	26.3	26.8	25.0	26.0	25.5	26.4	26.8
	8H	25.1	25.9	25.5	26.4	26.9	25.2	26.0	25.6	26.5	26.9
	12H	25.1	25.9	25.6	26.4	26.9	25.2	26.0	25.7	26.5	27.0
8H	4H	24.7	25.6	25.2	26.0	26.5	24.8	25.7	25.2	26.1	26.6
	6H	25.3	26.0	25.8	26.5	27.0	25.4	26.1	25.8	26.6	27.0
	8H	25.4	26.1	26.0	26.6	27.1	25.5	26.2	26.0	26.7	27.2
	12H	25.5	26.1	26.1	26.6	27.2	25.6	26.2	26.2	26.7	27.3
12H	4H	24.7	25.5	25.2	26.0	26.5	24.8	25.6	25.3	26.1	26.5
	6H	25.3	26.0	25.8	26.4	27.0	25.4	26.0	25.9	26.5	27.0
	8H	25.5	26.1	26.0	26.6	27.1	25.6	26.2	26.1	26.7	27.2

Maximum UGR = 27.3

POLAR GRAPH

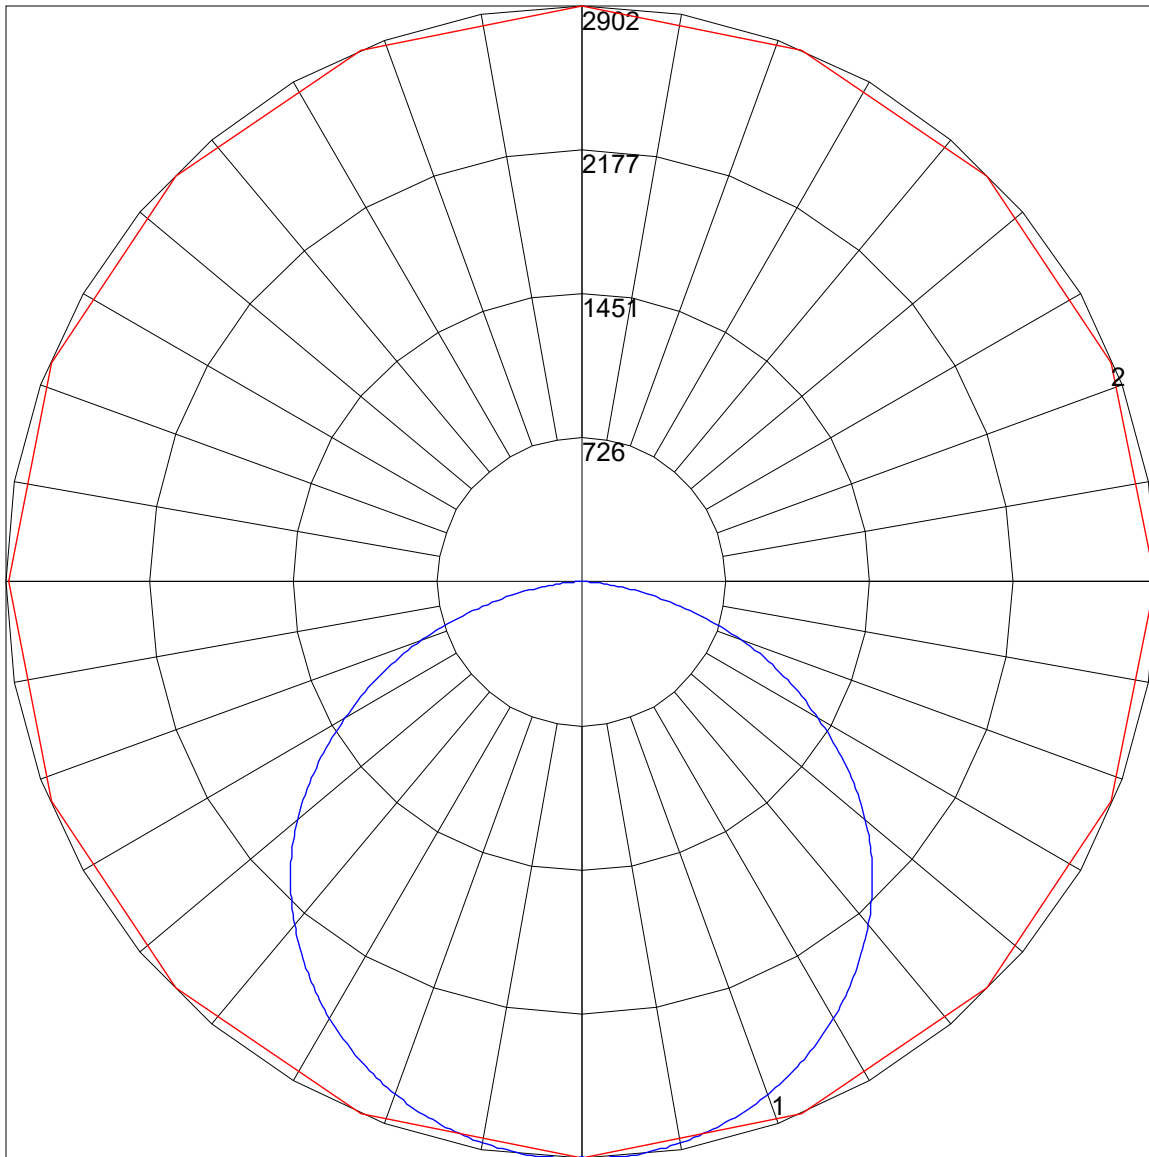

Maximum Candela = 2902.332 Located At Horizontal Angle = 90, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)