



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV FR 930 @1300MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-018(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 6 SEL75 UV FR 930

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Three LS3872A 48 LED boards, 3000K

[BALLAST] One KTLD-75-UV-PS1400-54-VDIM-LM2 LED driver set to 1300mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	9652
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	149
Total Luminaire Watts	64.9
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	6.00 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.06 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	13625	13093	13037
55	11902	11895	11974
65	9601	10420	10570
75	7022	8933	8949
85	4165	8378	7850

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV FR 930 @1300MA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	1200.04	N.A.	12.40
0-30	2552.02	N.A.	26.40
0-40	4178.66	N.A.	43.30
0-60	7324.92	N.A.	75.90
0-80	9130.94	N.A.	94.60
0-90	9479.96	N.A.	98.20
10-90	9170.09	N.A.	95.00
20-40	2978.62	N.A.	30.90
20-50	4647.68	N.A.	48.20
40-70	4258.36	N.A.	44.10
60-80	1806.02	N.A.	18.70
70-80	693.91	N.A.	7.20
80-90	349.03	N.A.	3.60
90-110	172.05	N.A.	1.80
90-120	172.40	N.A.	1.80
90-130	172.40	N.A.	1.80
90-150	172.40	N.A.	1.80
90-180	172.40	N.A.	1.80
110-180	0.35	N.A.	0.00
0-180	9652.36	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	309.88
10-20	890.17
20-30	1351.97
30-40	1626.65
40-50	1669.06
50-60	1477.19
60-70	1112.11
70-80	693.91
80-90	349.03
90-100	139.91
100-110	32.14
110-120	0.35
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV FR 930 @1300MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	81
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	76	73	69	67
3	89	78	70	63	86	77	69	63	73	67	61	70	65	60	67	63	59	56
4	82	69	60	54	79	68	60	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34	32
8	60	46	38	32	58	45	37	32	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 6 SEL75 UV FR 930 @1300MA.IES

UGR TABLE - CORRECTED

Reflectances


Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	19.5	21.1	19.9	21.5	21.8	21.2	22.8	21.6	23.2	23.5
	3H	20.8	22.3	21.2	22.6	23.0	23.2	24.6	23.6	25.0	25.4
	4H	21.2	22.6	21.6	23.0	23.4	24.0	25.4	24.5	25.8	26.2
	6H	21.4	22.7	21.9	23.1	23.5	24.8	26.1	25.3	26.5	27.0
	8H	21.5	22.7	21.9	23.1	23.6	25.2	26.4	25.7	26.9	27.3
	12H	21.5	22.7	22.0	23.1	23.6	25.6	26.8	26.1	27.2	27.7
4H	2H	20.3	21.7	20.8	22.1	22.5	21.7	23.0	22.1	23.4	23.9
	3H	21.9	23.0	22.3	23.5	23.9	23.9	25.0	24.3	25.5	25.9
	4H	22.4	23.5	22.9	23.9	24.4	24.9	25.9	25.4	26.4	26.9
	6H	22.8	23.7	23.2	24.2	24.7	25.9	26.8	26.3	27.3	27.8
	8H	22.8	23.7	23.3	24.2	24.7	26.3	27.2	26.8	27.7	28.2
	12H	22.9	23.7	23.4	24.2	24.7	26.8	27.6	27.3	28.1	28.6
8H	4H	23.0	23.8	23.5	24.3	24.8	25.1	26.0	25.6	26.5	27.0
	6H	23.5	24.2	24.0	24.7	25.3	26.3	27.0	26.8	27.5	28.0
	8H	23.7	24.3	24.2	24.9	25.4	26.9	27.5	27.4	28.0	28.6
	12H	23.8	24.4	24.3	24.9	25.5	27.5	28.1	28.0	28.6	29.2
12H	4H	23.1	23.9	23.6	24.4	24.9	25.1	25.9	25.6	26.4	26.9
	6H	23.7	24.4	24.3	24.9	25.4	26.3	27.0	26.9	27.5	28.1
	8H	23.9	24.5	24.5	25.1	25.7	27.0	27.5	27.5	28.1	28.7

Maximum UGR = 29.2

POLAR GRAPH

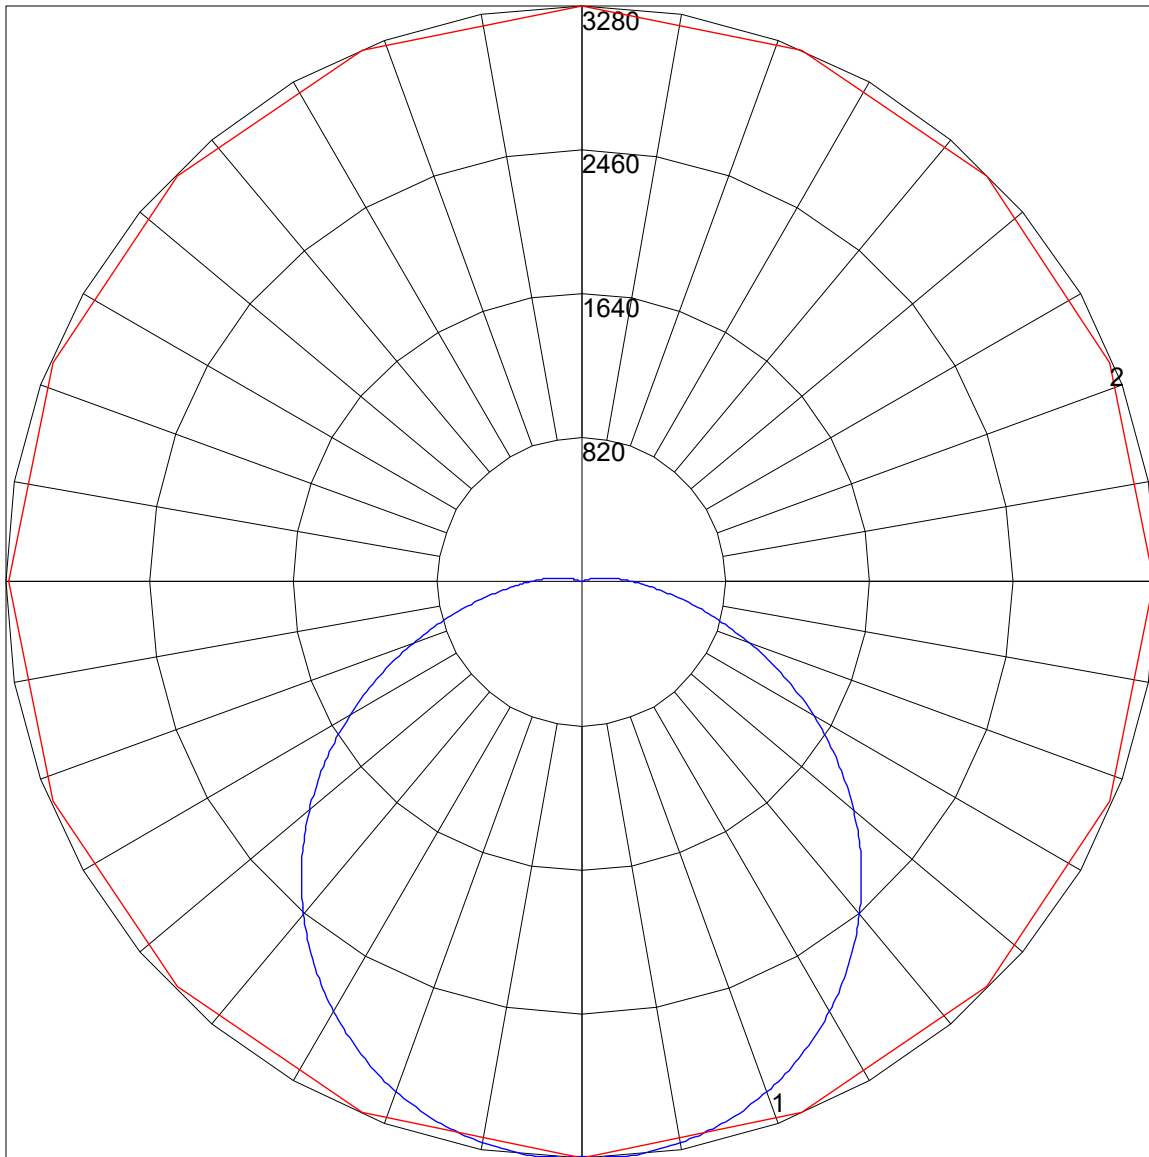

Maximum Candela = 3280.055 Located At Horizontal Angle = 90, Vertical Angle = 3.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (3.5) (Through Max. Cd.)