



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 8 SEL35 UV FR 940 @500MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-018(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 8 SEL35 UV FR 940

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Four LS3872A 48 LED boards, 4000K

[BALLAST] One KTLD-35-UV-PS650-54-VDIM-LM1 LED driver set to 500mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3880
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	164
Total Luminaire Watts	23.7
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	8.00 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.06 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4118	3953	3930
55	3601	3594	3610
65	2910	3151	3187
75	2137	2706	2698
85	1290	2548	2366

IES INDOOR REPORT**PHOTOMETRIC FILENAME : ECL G2 8 SEL35 UV FR 940 @500MA.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	482.35	N.A.	12.40
0-30	1025.77	N.A.	26.40
0-40	1679.59	N.A.	43.30
0-60	2944.21	N.A.	75.90
0-80	3670.12	N.A.	94.60
0-90	3810.41	N.A.	98.20
10-90	3685.86	N.A.	95.00
20-40	1197.24	N.A.	30.90
20-50	1868.11	N.A.	48.20
40-70	1711.62	N.A.	44.10
60-80	725.92	N.A.	18.70
70-80	278.91	N.A.	7.20
80-90	140.29	N.A.	3.60
90-110	69.16	N.A.	1.80
90-120	69.30	N.A.	1.80
90-130	69.30	N.A.	1.80
90-150	69.30	N.A.	1.80
90-180	69.30	N.A.	1.80
110-180	0.14	N.A.	0.00
0-180	3879.71	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	124.55
10-20	357.80
20-30	543.42
30-40	653.82
40-50	670.87
50-60	593.75
60-70	447.00
70-80	278.91
80-90	140.29
90-100	56.24
100-110	12.92
110-120	0.14
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 8 SEL35 UV FR 940 @500MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	81
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	76	73	69	67
3	89	78	70	63	86	77	69	63	73	67	61	70	65	60	67	63	59	56
4	82	69	60	54	79	68	60	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36
7	64	51	42	36	62	50	41	35	48	40	35	46	40	35	45	39	34	32
8	60	46	38	32	58	45	37	32	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 8 SEL35 UV FR 940 @500MA.IES

UGR TABLE - CORRECTED


Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	15.3	16.9	15.7	17.3	17.6	17.0	18.6	17.4	19.0	19.3
	3H	16.6	18.1	17.0	18.4	18.8	19.0	20.5	19.4	20.8	21.2
	4H	17.0	18.4	17.4	18.8	19.2	19.8	21.2	20.3	21.6	22.0
	6H	17.2	18.5	17.7	18.9	19.3	20.6	21.9	21.1	22.3	22.8
	8H	17.3	18.5	17.7	18.9	19.4	21.0	22.3	21.5	22.7	23.1
	12H	17.3	18.5	17.8	18.9	19.4	21.4	22.6	21.9	23.0	23.5
4H	2H	16.1	17.5	16.6	17.9	18.3	17.5	18.9	17.9	19.2	19.7
	3H	17.7	18.9	18.1	19.3	19.7	19.7	20.9	20.1	21.3	21.7
	4H	18.2	19.3	18.7	19.7	20.2	20.7	21.8	21.2	22.2	22.7
	6H	18.6	19.5	19.0	20.0	20.5	21.7	22.6	22.2	23.1	23.6
	8H	18.6	19.5	19.1	20.0	20.5	22.1	23.0	22.6	23.5	24.0
	12H	18.7	19.5	19.2	20.0	20.5	22.7	23.4	23.2	24.0	24.5
8H	4H	18.8	19.6	19.3	20.1	20.6	20.9	21.8	21.4	22.3	22.8
	6H	19.3	20.0	19.8	20.5	21.1	22.1	22.8	22.6	23.3	23.9
	8H	19.5	20.1	20.0	20.7	21.2	22.7	23.3	23.2	23.9	24.4
	12H	19.6	20.2	20.1	20.7	21.3	23.3	23.9	23.9	24.4	25.0
12H	4H	18.9	19.7	19.4	20.2	20.7	20.9	21.7	21.5	22.3	22.8
	6H	19.5	20.2	20.1	20.7	21.3	22.2	22.8	22.7	23.3	23.9
	8H	19.8	20.3	20.3	20.9	21.5	22.8	23.4	23.3	23.9	24.5

Maximum UGR = 25.0

POLAR GRAPH

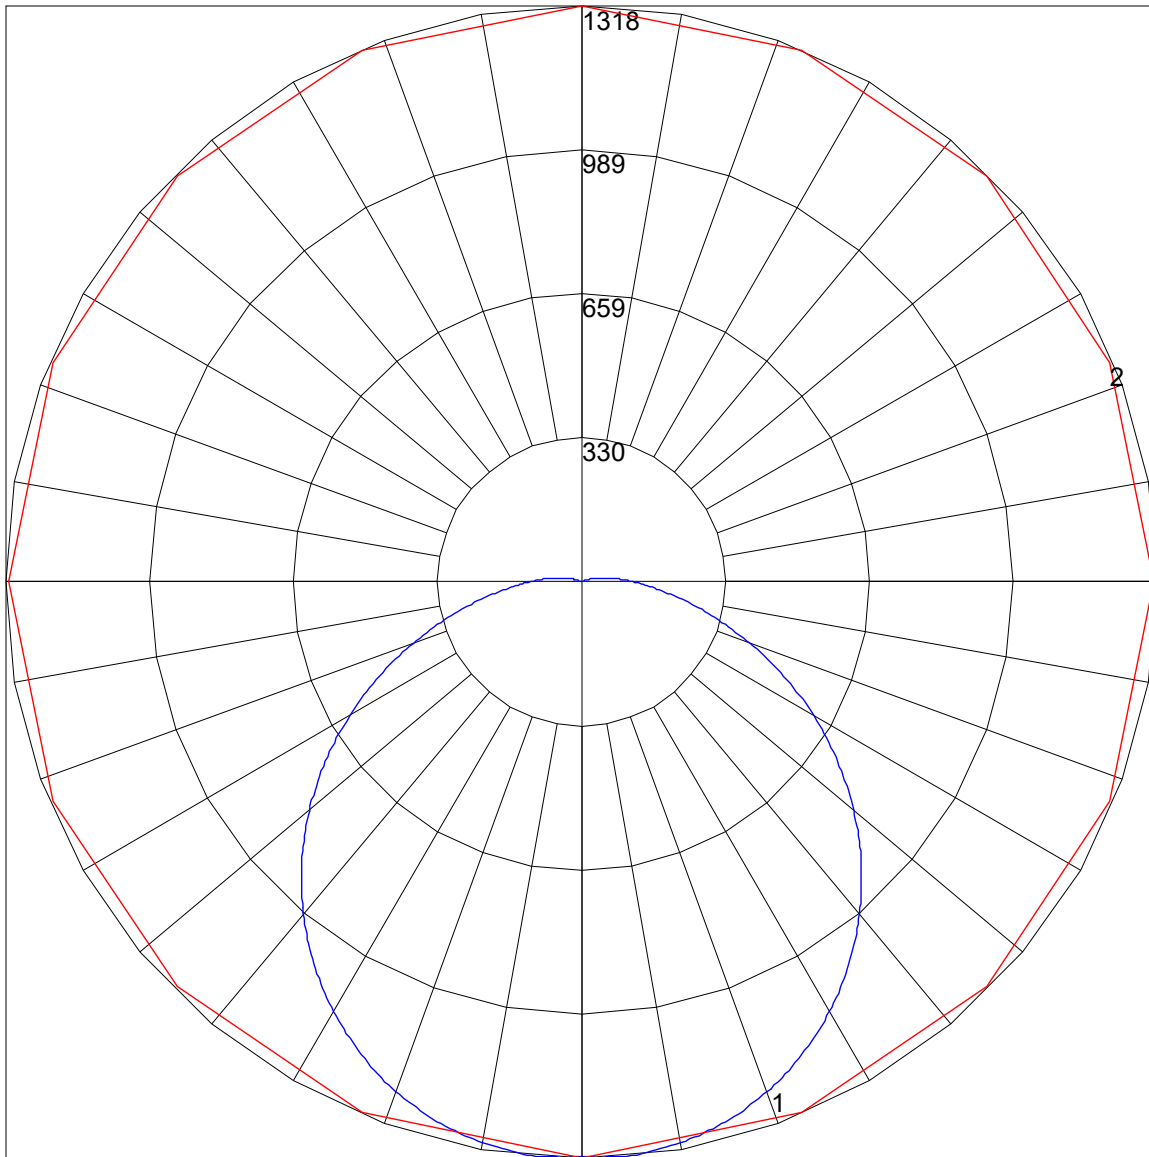

Maximum Candela = 1318.398 Located At Horizontal Angle = 90, Vertical Angle = 3.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (3.5) (Through Max. Cd.)