



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL G2 8 SEL45 UV 940 @700MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-016(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/5/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL G2 8 SEL45 UV 940

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] no enclosure.

[LAMPCAT] Four LS3872A 48 LED boards, 4000K

[BALLAST] One KTLD-45-UV-PS850-54-VDIM-LM1 LED driver set at 700mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5732
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	170
Total Luminaire Watts	33.8
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.32
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	8.00 ft
Luminous Width (90-270)	0.38 ft
Luminous Height	0.02 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6830	6596	6542
55	6721	6403	6211
65	6364	5833	5600
75	5443	4587	4268
85	3116	2077	1840

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 8 SEL45 UV 940 @700MA.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	701.02	N.A.	12.20
0-30	1501.23	N.A.	26.20
0-40	2485.46	N.A.	43.40
0-60	4496.88	N.A.	78.50
0-80	5639.3	N.A.	98.40
0-90	5731.4	N.A.	100.00
10-90	5550.93	N.A.	96.80
20-40	1784.44	N.A.	31.10
20-50	2830.55	N.A.	49.40
40-70	2750.03	N.A.	48.00
60-80	1142.42	N.A.	19.90
70-80	403.81	N.A.	7.00
80-90	92.09	N.A.	1.60
90-110	0.50	N.A.	0.00
90-120	0.50	N.A.	0.00
90-130	0.50	N.A.	0.00
90-150	0.50	N.A.	0.00
90-180	0.50	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	5731.9	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	180.47
10-20	520.55
20-30	800.22
30-40	984.23
40-50	1046.1
50-60	965.32
60-70	738.61
70-80	403.81
80-90	92.09
90-100	0.50
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 8 SEL45 UV 940 @700MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84
2	99	90	83	78	96	88	82	77	85	79	75	82	77	73	78	75	71	69
3	90	79	71	64	87	77	70	64	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	68	60	54	66	59	53	64	57	52	61	56	52	49
5	75	62	53	46	73	61	53	46	59	51	46	57	50	45	55	49	45	42
6	69	56	47	40	68	55	46	40	53	45	40	51	45	39	50	44	39	37
7	64	51	42	36	63	50	41	35	48	41	35	47	40	35	45	39	35	33
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23


IES INDOOR REPORT
PHOTOMETRIC FILENAME : ECL G2 8 SEL45 UV 940 @700MA.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	18.7	20.4	19.1	20.7	21.0	18.8	20.5	19.2	20.8	21.1
	3H	20.5	22.0	20.9	22.3	22.7	20.6	22.1	21.0	22.5	22.8
	4H	21.1	22.5	21.5	22.9	23.2	21.2	22.6	21.6	23.0	23.4
	6H	21.5	22.8	21.9	23.2	23.6	21.6	22.9	22.0	23.3	23.7
	8H	21.6	22.8	22.0	23.2	23.6	21.7	23.0	22.2	23.4	23.8
	12H	21.6	22.8	22.0	23.2	23.6	21.8	23.0	22.2	23.4	23.8
4H	2H	19.4	20.8	19.8	21.1	21.5	19.5	20.9	19.9	21.2	21.6
	3H	21.3	22.5	21.7	22.9	23.3	21.4	22.6	21.8	23.0	23.4
	4H	22.1	23.1	22.5	23.5	24.0	22.1	23.2	22.6	23.6	24.0
	6H	22.6	23.5	23.0	23.9	24.4	22.6	23.6	23.1	24.0	24.5
	8H	22.7	23.5	23.1	24.0	24.5	22.8	23.6	23.2	24.1	24.5
	12H	22.7	23.5	23.2	24.0	24.5	22.8	23.6	23.3	24.1	24.6
8H	4H	22.3	23.2	22.8	23.6	24.1	22.4	23.3	22.8	23.7	24.2
	6H	22.9	23.6	23.4	24.1	24.6	23.0	23.7	23.5	24.2	24.6
	8H	23.0	23.7	23.6	24.2	24.7	23.1	23.8	23.6	24.3	24.8
	12H	23.2	23.7	23.7	24.2	24.8	23.3	23.8	23.8	24.3	24.9
12H	4H	22.3	23.1	22.8	23.6	24.1	22.4	23.2	22.9	23.7	24.1
	6H	22.9	23.6	23.4	24.0	24.6	23.0	23.6	23.5	24.1	24.6
	8H	23.1	23.7	23.6	24.2	24.8	23.2	23.8	23.7	24.3	24.8

Maximum UGR = 24.9

POLAR GRAPH

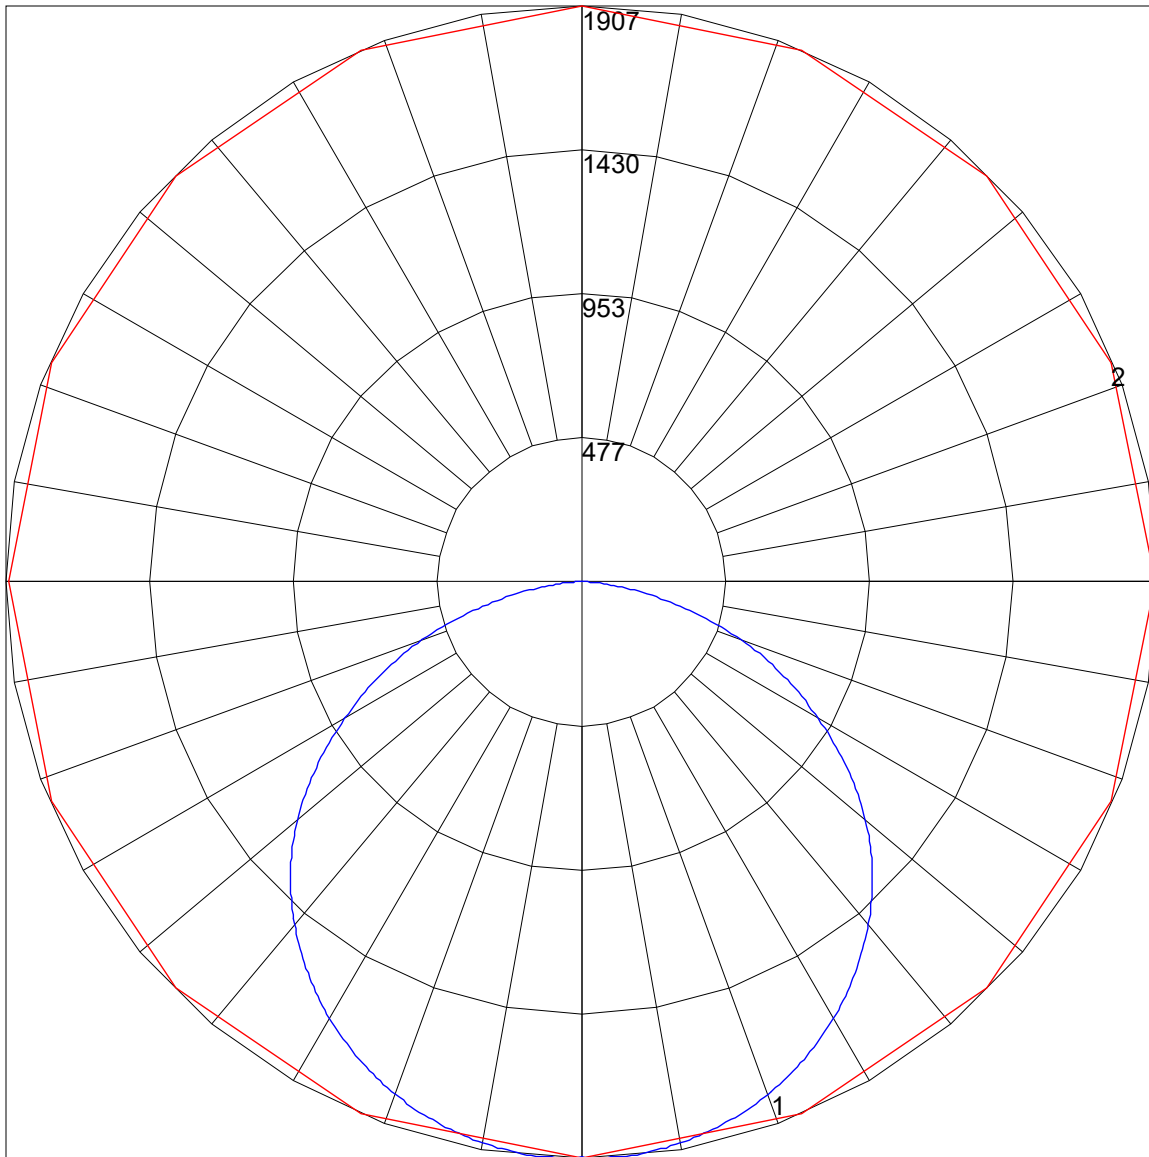

Maximum Candela = 1906.891 Located At Horizontal Angle = 90, Vertical Angle = 2.5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)