



IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1500MA.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-006(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/6/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL N G2 6 SEL100 UV FR 940

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Three LS3872A 64 LED boards, 4000K

[BALLAST] One KTLD-100-UV-PS1800-54-VDIM-LM2 LED driver set at 1500mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	11393
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	153
Total Luminaire Watts	74.3
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	5.84 ft
Luminous Width (90-270)	0.21 ft
Luminous Height	0.06 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	29212	26020	25264
55	25421	22981	22375
65	20441	19291	18774
75	14955	15423	14710
85	8920	12501	11152

IES INDOOR REPORT**PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1500MA.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1396.79	N.A.	12.30
0-30	2970.09	N.A.	26.10
0-40	4862.78	N.A.	42.70
0-60	8522.78	N.A.	74.80
0-80	10618.48	N.A.	93.20
0-90	11026.96	N.A.	96.80
10-90	10666.16	N.A.	93.60
20-40	3465.99	N.A.	30.40
20-50	5408.45	N.A.	47.50
40-70	4950.86	N.A.	43.50
60-80	2095.7	N.A.	18.40
70-80	804.84	N.A.	7.10
80-90	408.48	N.A.	3.60
90-110	274.41	N.A.	2.40
90-120	320.32	N.A.	2.80
90-130	344.61	N.A.	3.00
90-150	362.82	N.A.	3.20
90-180	366.01	N.A.	3.20
110-180	91.60	N.A.	0.80
0-180	11392.98	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	360.81
10-20	1035.98
20-30	1573.3
30-40	1892.68
40-50	1942.46
50-60	1717.55
60-70	1290.85
70-80	804.84
80-90	408.48
90-100	185.21
100-110	89.20
110-120	45.92
120-130	24.28
130-140	12.43
140-150	5.79
150-160	2.48
160-170	0.71
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1500MA.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	107	102	98	94	104	100	96	92	95	91	88	90	88	85	86	84	82	80
2	97	89	82	76	94	87	80	75	83	77	73	79	74	70	75	72	68	66
3	89	78	70	63	86	76	69	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	68	59	53	65	57	52	62	56	51	59	54	50	47
5	75	62	53	46	72	60	52	46	58	50	45	56	49	44	53	48	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	44	39	48	43	38	36
7	64	50	42	35	62	49	41	35	48	40	35	46	39	34	44	38	34	32
8	60	46	37	32	58	45	37	31	44	36	31	42	35	31	41	35	30	28
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1500MA.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	21.6	23.1	22.0	23.5	23.9	23.6	25.2	24.0	25.6	26.0
	3H	22.8	24.2	23.2	24.6	25.0	25.6	27.0	26.0	27.4	27.8
	4H	23.1	24.5	23.6	24.9	25.3	26.4	27.8	26.9	28.2	28.6
	6H	23.3	24.6	23.8	25.0	25.5	27.2	28.5	27.7	28.9	29.4
	8H	23.3	24.6	23.8	25.0	25.5	27.6	28.8	28.1	29.3	29.7
	12H	23.4	24.5	23.8	25.0	25.5	28.0	29.2	28.5	29.6	30.1

UGR Viewed Endwise


4H	2H	22.4	23.8	22.9	24.2	24.6	24.0	25.4	24.5	25.8	26.2
	3H	23.8	25.0	24.3	25.4	25.9	26.2	27.4	26.7	27.8	28.3
	4H	24.3	25.4	24.8	25.8	26.3	27.2	28.2	27.7	28.7	29.2
	6H	24.6	25.5	25.1	26.0	26.6	28.2	29.1	28.7	29.6	30.1
	8H	24.7	25.5	25.2	26.0	26.6	28.6	29.5	29.1	30.0	30.5
	12H	24.7	25.5	25.2	26.0	26.6	29.1	29.9	29.6	30.4	31.0

8H	4H	24.9	25.7	25.4	26.2	26.8	27.4	28.3	27.9	28.7	29.3
	6H	25.3	26.0	25.9	26.6	27.1	28.5	29.2	29.0	29.8	30.3
	8H	25.5	26.1	26.0	26.7	27.2	29.1	29.7	29.6	30.3	30.8
	12H	25.6	26.1	26.1	26.7	27.3	29.7	30.3	30.3	30.8	31.5

12H	4H	25.0	25.8	25.5	26.3	26.8	27.4	28.2	27.9	28.7	29.2
	6H	25.5	26.2	26.1	26.7	27.3	28.5	29.2	29.1	29.7	30.3
	8H	25.7	26.3	26.3	26.9	27.5	29.2	29.7	29.7	30.3	30.9

Maximum UGR = 31.5

POLAR GRAPH

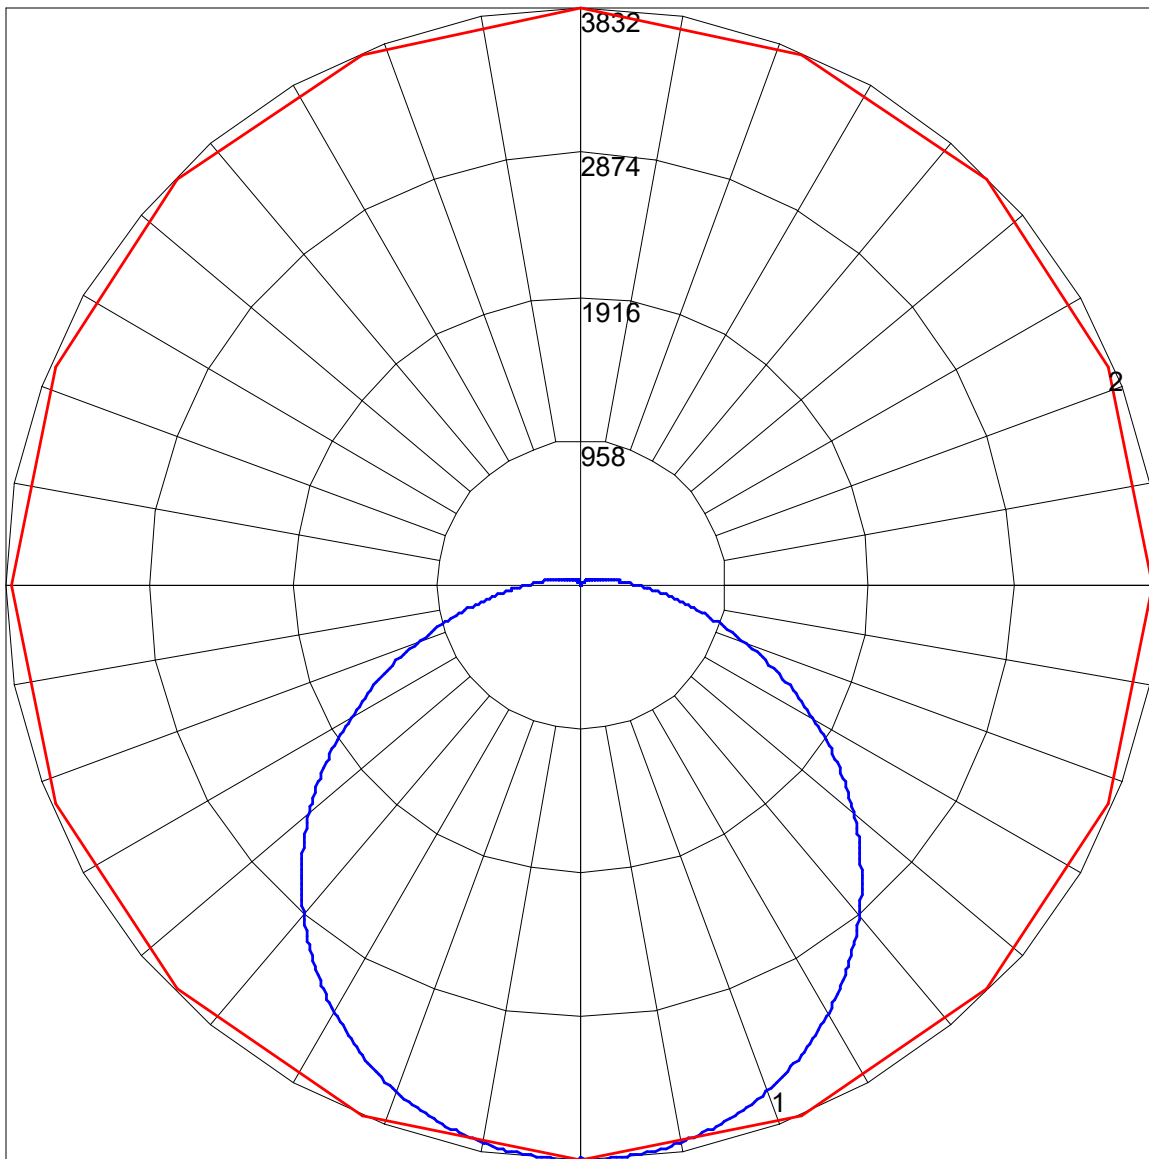

Maximum Candela = 3831.73 Located At Horizontal Angle = 90, Vertical Angle = .5
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (.5) (Through Max. Cd.)