



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1700MA.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] LLIA001735-006(s)

[TESTLAB] LightLab International Allentown, LLC

[ISSUE DATE] 6/6/2024

[MANUFAC] LumenFocus, LLC

[LUMCAT] ECL N G2 6 SEL100 UV FR 940

[LUMINAIRE] Surface or suspended mounted, formed white painted steel housing/reflector,

[MORE] translucent curved plastic enclosure.

[LAMPCAT] Three LS3872A 64 LED boards, 4000K

[BALLAST] One KTLD-100-UV-PS1800-54-VDIM-LM2 LED driver set at 1700mA

[OTHER] 120.0Vac, 60.00Hz

[OTHER] This test was performed using the absolute method of photometry.

[MORE] Lamp lumens value was set to -1

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	12798
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	151
Total Luminaire Watts	84.9
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	5.84 ft
Luminous Width (90-270)	0.21 ft
Luminous Height	0.06 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	32814	29228	28379
55	28555	25815	25134
65	22961	21669	21089
75	16799	17325	16524
85	10019	14043	12527

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1700MA.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1569.01	N.A.	12.30
0-30	3336.29	N.A.	26.10
0-40	5462.33	N.A.	42.70
0-60	9573.6	N.A.	74.80
0-80	11927.69	N.A.	93.20
0-90	12386.54	N.A.	96.80
10-90	11981.24	N.A.	93.60
20-40	3893.33	N.A.	30.40
20-50	6075.29	N.A.	47.50
40-70	5561.28	N.A.	43.50
60-80	2354.09	N.A.	18.40
70-80	904.08	N.A.	7.10
80-90	458.85	N.A.	3.60
90-110	308.24	N.A.	2.40
90-120	359.82	N.A.	2.80
90-130	387.09	N.A.	3.00
90-150	407.55	N.A.	3.20
90-180	411.14	N.A.	3.20
110-180	102.90	N.A.	0.80
0-180	12797.68	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	405.29
10-20	1163.71
20-30	1767.28
30-40	2126.04
40-50	2181.96
50-60	1929.31
60-70	1450.01
70-80	904.08
80-90	458.85
90-100	208.04
100-110	100.20
110-120	51.58
120-130	27.28
130-140	13.96
140-150	6.50
150-160	2.79
160-170	0.80
170-180	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1700MA.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	107	102	98	94	104	100	96	92	95	91	88	90	88	85	86	84	82	80
2	97	89	82	76	94	87	80	75	83	77	73	79	74	70	75	72	68	66
3	89	78	70	63	86	76	69	62	73	66	61	70	64	59	67	62	58	56
4	81	69	60	53	79	68	59	53	65	57	52	62	56	51	59	54	50	47
5	75	62	53	46	72	60	52	46	58	50	45	56	49	44	53	48	43	41
6	69	56	47	40	67	54	46	40	52	45	39	50	44	39	48	43	38	36
7	64	50	42	35	62	49	41	35	48	40	35	46	39	34	44	38	34	32
8	60	46	37	32	58	45	37	31	44	36	31	42	35	31	41	35	30	28
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	25
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : ECL N G2 6 SEL100 UV FR 940 @1700MA.IES

## UGR TABLE - CORRECTED

### Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

### Room Size UGR Viewed Crosswise

X=2H	Y=2H	22.0	23.5	22.4	23.9	24.3	24.0	25.6	24.4	26.0	26.4
	3H	23.2	24.6	23.6	25.0	25.4	26.0	27.4	26.4	27.8	28.2
	4H	23.5	24.9	24.0	25.3	25.7	26.8	28.2	27.3	28.6	29.0
	6H	23.7	25.0	24.2	25.4	25.9	27.6	28.9	28.1	29.3	29.8
	8H	23.7	25.0	24.2	25.4	25.9	28.0	29.2	28.5	29.7	30.1
	12H	23.8	24.9	24.2	25.4	25.9	28.4	29.6	28.9	30.0	30.5

### UGR Viewed Endwise


4H	2H	22.8	24.2	23.3	24.6	25.0	24.4	25.8	24.9	26.2	26.6
	3H	24.2	25.4	24.7	25.8	26.3	26.6	27.8	27.1	28.2	28.7
	4H	24.7	25.8	25.2	26.2	26.7	27.6	28.6	28.1	29.1	29.6
	6H	25.0	25.9	25.5	26.4	27.0	28.6	29.5	29.1	30.0	30.5
	8H	25.1	25.9	25.6	26.4	27.0	29.0	29.9	29.5	30.4	30.9
	12H	25.1	25.9	25.6	26.4	27.0	29.5	30.3	30.0	30.8	31.4

8H	4H	25.3	26.1	25.8	26.6	27.2	27.8	28.7	28.3	29.1	29.7
	6H	25.7	26.4	26.3	27.0	27.5	28.9	29.6	29.4	30.2	30.7
	8H	25.9	26.5	26.4	27.1	27.6	29.5	30.1	30.0	30.7	31.2
	12H	26.0	26.5	26.5	27.1	27.7	30.1	30.7	30.7	31.2	31.9

12H	4H	25.4	26.2	25.9	26.7	27.2	27.8	28.6	28.3	29.1	29.6
	6H	25.9	26.6	26.5	27.1	27.7	28.9	29.6	29.5	30.1	30.7
	8H	26.1	26.7	26.7	27.3	27.9	29.6	30.1	30.1	30.7	31.3

Maximum UGR = 31.9

POLAR GRAPH

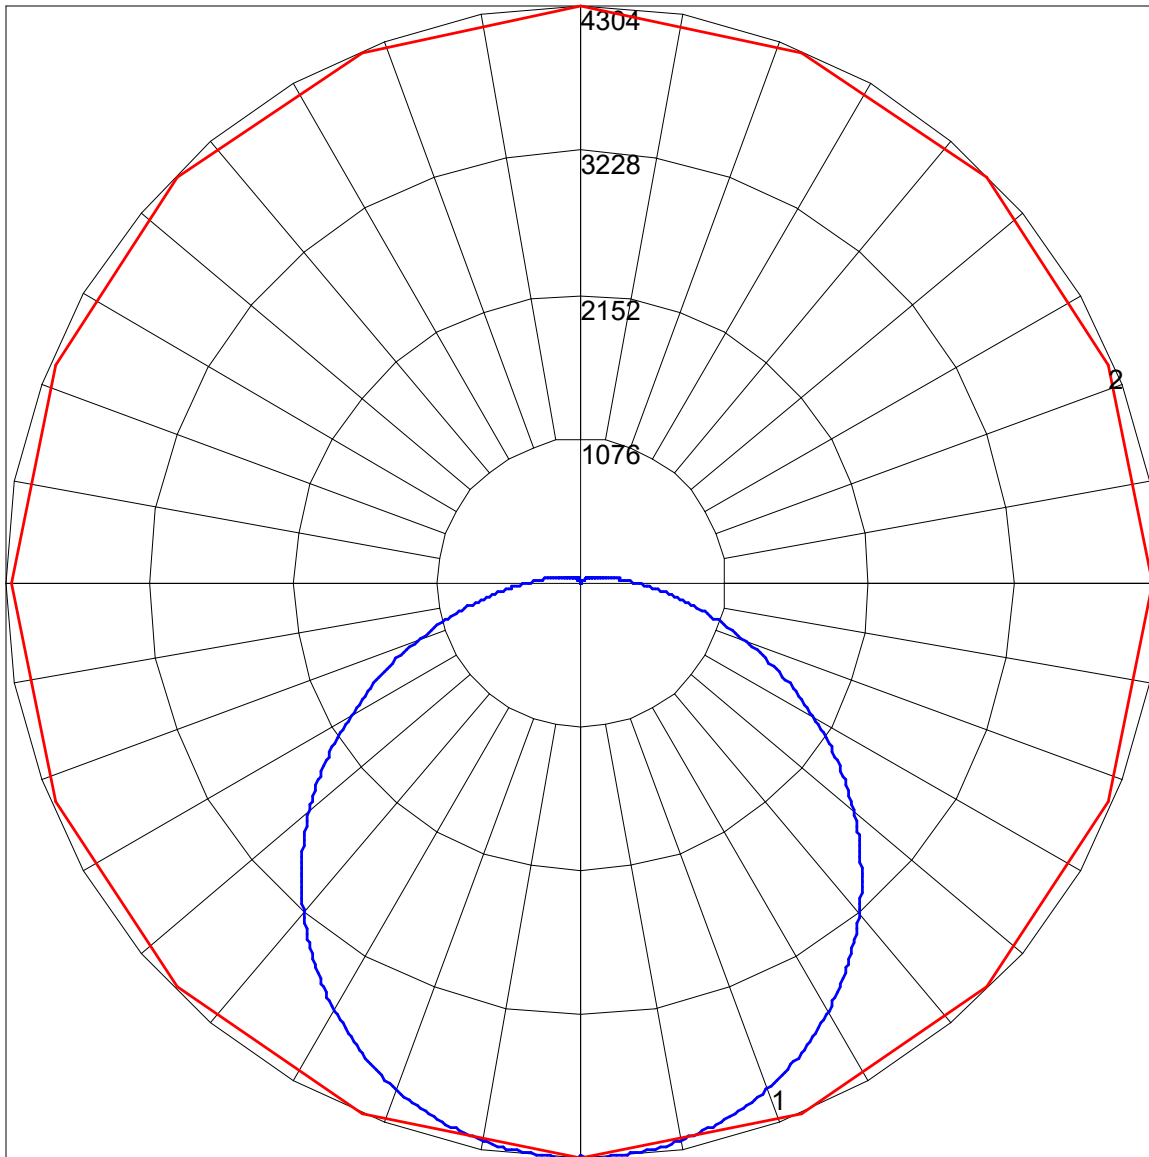

Maximum Candela = 4304.164 Located At Horizontal Angle = 90, Vertical Angle = .5  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (.5) (Through Max. Cd.)